Proceedings of the I·R·E

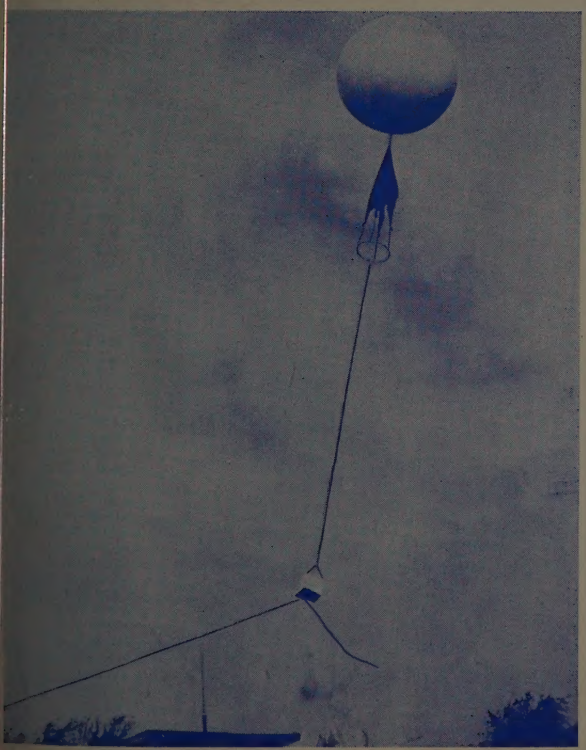

Official U. S. Navy Photograph

STRATOSPHERE RADIO SURVEY

JUNE 1943

VOLUME 31 NUMBER 6

PART I

Postwar Research

F-M Converter Unit

Electrostatic Loop Shielding

Frequency-Stabilized Oscillators

Delhi Field Strength

R-F Transmission Lines

Hartley Oscillator

Network Theory—Part III

Convention Address

Wartime Radio Engineering

Institute of Radio Engineers

Designs for War . . . Transformers

The requirements in war transformers differ considerably from those of commercial units. The UTC engineering staff has pioneered many of the design features which make possible modern war transformers. A few typical designs are illustrated.

This transformer is tunable . . . ideal for signal frequency amplifiers.

This oil filled transformer is hermetically sealed with glass high voltage terminals solder-sealed to case.

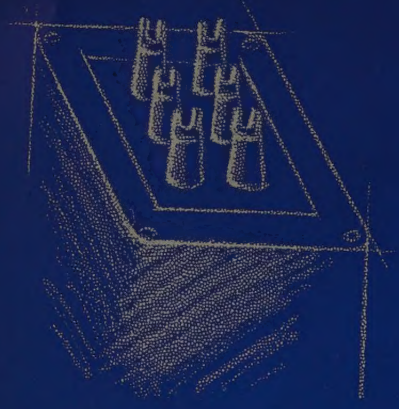

Designed for minimum amplitude distortion . . . this unit has distortion under .01% for a power range of 100 : 1 . . . Q over 150.

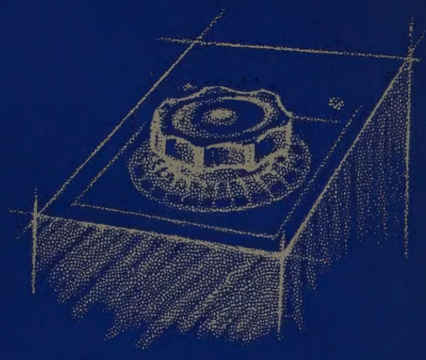

This Varitran supplies fixed filament and bias voltages, as well as variable plate voltage all in one unit.

May we design a War Unit to your application?

UNITED TRANSFORMER CO.

150 VARICK STREET ★ NEW YORK, N. Y.

EXPORT DIVISION: 100 VARICK STREET, NEW YORK, N. Y. CABLES: "ARLAB"

BOARD OF DIRECTORS
1943
Lynde P. Wheeler, *President*
F. Sherbrooke Barton, *Vice President*
Raymond A. Heising, *Treasurer*
Haraden Pratt, *Secretary*
Alfred N. Goldsmith, *Editor*
Stuart L. Bailey
Wilmer L. Barrow
E. Finley Carter
Adolph B. Chamberlain
Ivan S. Coggeshall
William L. Everitt
Harold T. Friis
Gilbert E. Gustafson
O. B. Hanson
Frederick B. Llewellyn
Frederick E. Terman
Browder J. Thompson
Hubert M. Turner
Arthur F. Van Dyck
Harold A. Wheeler
William C. White

•

Harold R. Zeamans, *General Counsel*

•

BOARD OF EDITORS
Alfred N. Goldsmith, *Editor*
Ralph R. Batcher
Philip S. Carter
Lewis M. Clement
Elmer W. Engstrom
William L. Everitt
Peter C. Goldmark
Frederick W. Grover
C. M. Jansky, Jr.
John D. Kraus
Frederick B. Llewellyn
Samuel S. Mackeown
Edward L. Nelson
Harry F. Olson
Greenleaf W. Pickard
Haraden Pratt
Conan A. Priest
Lynne C. Smeby
Browder J. Thompson
Harold A. Wheeler
Laurens E. Whittemore
Gerald W. Willard
William Wilson
Charles J. Young

•

Helen M. Stote, *Associate Editor*
William C. Copp, *Advertising Manager*
William B. Cowilich, *Assistant Secretary*

Proceedings of the I·R·E

Published Monthly by
The Institute of Radio Engineers, Inc.

VOLUME 31 — *June, 1943* — NUMBER 6

Maintain Postwar Research at Wartime Level ..... S. C. Hooper 247
Albert W. Hull 248
260- to 350-Megacycle Converter Unit for General Electric Frequency-Modulation Station Monitor ..... H. R. Summerhayes, Jr. 249
A Method of Measuring the Effectiveness of Electrostatic Loop Shielding ... Dudley E. Foster and Charles W. Finnigan 253
Variable-Frequency Bridge-Type Frequency-Stabilized Oscillators ..... W. G. Shepherd and R. O. Wise 256
A Note on Field Strength of Delhi 3 and Delhi 4 at Calcutta During the Solar Eclipse of September 21, 1941 ..... S. P. Chakravarti 269
Open-Wire Radio-Frequency Transmission Lines .... Edmund A. Laport 271
An Analytical Demonstration of Hartley Oscillator Action ..... F. A. Record and J. L. Stiles 281
Network Theory, Filters, and Equalizers—Part III .... Frederick E. Terman 288
Corrections to "Network Theory, Filters, and Equalizers—Part I," by Frederick E. Terman 302
Address to the Conference ..... Noel Ashbridge 302
Radio Engineering in Wartime ..... James Lawrence Fly 303
Institute News and Radio Notes 305
Television Prospects 305
Board of Directors 305
Executive Committee 306
Election Notice 307
Correspondence: Proposed Constitutional Amendments 307
Books: (For list of Book Reviews see page 287) 309
Contributors 313
Section Meetings xx
Membership xxii
New Equipment Notes xxx
Army-Navy "E" Honor Roll xxxiv
Current Literature xliv
Booklets xliv
Radio Education Notes xlviii
Positions Open liv
Advertising Index lxii

Responsibility for the contents of papers published in the PROCEEDINGS rests upon the authors. Statements made in papers are not binding on the Institute or its members.

Entered as second-class matter October 26, 1927, at the post office at Menasha, Wisconsin, under the Act of February 28, 1925, embodied in Paragraph 4, Section 538 of the Postal Laws and Regulations. Publication office, 450 Ahnaip Street, Menasha, Wisconsin. Editorial and advertising offices, 330 West 42nd St., New York, N. Y. Subscription $10.00 per year; foreign, $11.00.

This issue of the PROCEEDINGS of the I.R.E. for June, 1943, is published in two parts. The price of Part I, which contains the technical papers and related material, is $1.00 per copy; the price of Part II of this issue, which includes the Cumulative Index of the PROCEEDINGS from 1913 through 1942, is $1.00 per copy.

Copyright, 1943, by The Institute of Radio Engineers, Inc.

THE INSTITUTE OF RADIO ENGINEERS

INCORPORATED

SECTION MEETINGS

ATLANTA	CHICAGO	CLEVELAND	DETROIT
June 18	June 18	June 24	June 18

LOS ANGELES	PITTSBURGH	WASHINGTON
June 15	June 14	June 14

SECTIONS

ATLANTA—Chairman, J. M. Comer; Secretary, Ivan Miles, 554—14 St., N. W., Atlanta, Ga.

BALTIMORE—Chairman, G. J. Gross; Secretary, A. D. Williams, Bendix Radio Corp., E. Joppa Rd., Towson, Md.

BOSTON—Chairman, R. F. Field; Secretary, R. O. Oberg, Northeastern Univ., Boston, Mass.

BUENOS AIRES—Chairman, J. P. Arnaud; Secretary, Alexander Nadosy, Florida St. 1065, Dept. C-16, Buenos Aires, Argentina.

BUFFALO-NIAGARA—Chairman, F. H. Scheer; Secretary, A. J. Dybowski, Dymac Radio, Inc., 1531 Main St., Buffalo, N. Y.

CHICAGO—Chairman, A. B. Bronwell; Secretary, W. O. Swinyard, Hazeltine Electronics Corp., 325 W. Huron St., Chicago, Ill.

CINCINNATI—Chairman, Howard Lepple; Secretary, J. L. Hollis, 6511 Betts Ave., North College Hill, Cincinnati, Ohio.

CLEVELAND—Chairman, F. C. Everett; Secretary, Hugh B. Okeson, 4362 W. 58 St., Cleveland, Ohio.

CONNECTICUT VALLEY—Chairman, W. M. Smith; Secretary, R. E. Moe, Radio Dept., General Electric Co., Bridgeport, Conn.

DALLAS-FORT WORTH—Chairman, H. E. Applegate; Secretary, P. C. Barnes, WFAA-WBAP, Grapevine, Texas.

DETROIT—Chairman, F. M. Hartz; Secretary, E. J. Hughes, 14209 Prevost, Detroit, Mich.

EMPORIUM—Chairman, R. K. Gessford; Secretary, H. D. Johnson, Sylvania Electric Products, Inc., Emporium, Pa.

INDIANAPOLIS—Chairman, S. E. Benson; Secretary, B. H. Rinehart, 1920 Park Ave., Indianapolis, Ind.

KANSAS CITY—Chairman, H. K. Morgan; Secretary G. L. Taylor, Midland Radio School Power and Light Building, Kansas City, Mo.

LOS ANGELES—Chairman, Lester Bowman; Secretary, R. C. Moody, Don Lee Broadcasting System, 5515 Melrose, Hollywood, Calif.

MONTREAL—Chairman, L. T. Bird; Secretary, J. C. R. Punchard, Northern Electric Co., 1261 Shearer St., Montreal, Que., Canada.

NEW YORK—Chairman, H. M. Lewis; Secretary, H. F. Dart, 33 Burnett St., Glen Ridge, N. J.

PHILADELPHIA—Chairman, J. B. Coleman; Secretary, H. J. Schrader, Bldg. 8, Fl. 10, RCA Manufacturing Co., Camden, N. J.

PITTSBURGH—Chairman, D. A. Myer; Secretary, A. P. Sunnergren, West Penn Power Co., Rm 1304, West Penn. Bldg., Pittsburgh, Pa.

PORTLAND—Chairman, K. G. Clark; Secretary, E. D. Scott, Rt. 14, Box 414, Portland, Ore.

ROCHESTER—Chairman, O. L. Angevine, Jr.; Secretary, G. R. Town, Stromberg-Carlson Tel. Mfg. Co., Rochester, N. Y.

ST. LOUIS—Chairman, P. S. McDaniel; Secretary, H. D. Seielstad, 1017 S. Berry Rd., Oakland, St. Louis, Mo.

SAN FRANCISCO—Chairman, Karl Spangenberg; Secretary, David Packard, Hewlett-Packard Co., Palto Alto, Calif.

SEATTLE—Chairman, L . B. Cochran; Secretary, H. E. Renfro, 4311 Thackeray Pl., Seattle, Wash.

TORONTO—Chairman, T. S. Farley; Secretary, J. T. Pfeiffer, Erie Resistor of Canada, Ltd., Terminal Warehouse Bldg., Toronto, Ont., Canada.

TWIN CITIES—Chairman, R. E. Allison; Secretary, A. G. Peck, Twin-Cities Studios, Columbia Broadcasting System, 625 Second Ave., Minneapolis, Minn.

WASHINGTON—Chairman, C. M. Hunt; Secretary, H. A. Burroughs, Rm. 7207, Federal Communications Commission, Washington, D. C.

As the war progresses and the day of victory of the United Nations steadily approaches, it is natural that the thoughtful leaders in the field of radio planning should consider certain major procedures which may prove helpful in peacetime and which will contribute to national insurance of safety in the regrettable but conceivable event of a later recurrence of hostilities.

Prominent among the constructive thinkers in the radio field for more than a generation is Admiral S. C. Hooper of the United States Navy. Both Naval and commercial communications owe much to his devoted and untiring efforts. These facts give added weight to the timely and analytic conclusions he has presented in the following statement which he has prepared for the PROCEEDINGS of the I.R.E. It is to be hoped that his recommendations will receive the careful consideration which they fully merit.

The Editor

Maintain Postwar Research at Wartime Level

REAR ADMIRAL S. C. HOOPER, U.S.N. (RETIRED)

Everyone interested in research knows that by far the greatest advances in the applications of new ideas have occurred during war time. That was true in World War I and again in the present war. Advances in aviation and electronics have been especially noteworthy during these periods. After war is over, the public, through industry, profits by such developments.

The ideas for new inventions seem to come with about the same frequency, be it in war or peace; but for some reasons there is not the same intense interest in developing these ideas in peacetime as in war. One reason for this difference is because nations at war are willing and anxious to spend unlimited funds for developments during wartime, whereas in peacetime, the money goes to other things.

In wartime, funds can be easily obtained to push even those developments which have hardly a hope of being successful, whereas in peacetime this is not usually the case.

Again, during war, the research groups are given great encouragement and expanded manyfold; then when peace comes a large percentage of young and promising research talent is lost forever to other activities.

In studying postwar plans, it seems to me that those interested in this subject should conduct a serious study, perhaps under the sponsorship of the National Research Council (with the assistance of technical societies such as The Institute of Radio Engineers) and endeavor to change the old-time custom of having research "slough off" at the end of the war.

Another point to consider is that it took nearly a year to perfect the organization and molding of nongovernment owned research facilities and personnel into a co-operative machine engaged in war research, and to knit and co-ordinate this machine with the War and Navy Departments. Even now such operation and co-ordination are not perfect. The question of preserving the present arrangements, or providing a better substitute, should also be studied.

The Naval and Military laboratories are usually cut to the bone after a war. This is literally not "good business." These laboratories should be preserved for the particular function of carrying on such original research as cannot be obtained by contract or otherwise from nongovernment laboratories, and for research necessary to apply commercial discoveries to Military and Naval purposes. A farsighted policy should be adopted on this feature. Whatever policy is decided upon should be such that the nongovernment laboratories should be depended upon to the utmost and the closest possible co-operation between government and private laboratories assured.

The progress and prosperity of our nation, as well as the readiness of its forces for war, are in no small measure dependent upon keeping peacetime research going full speed.

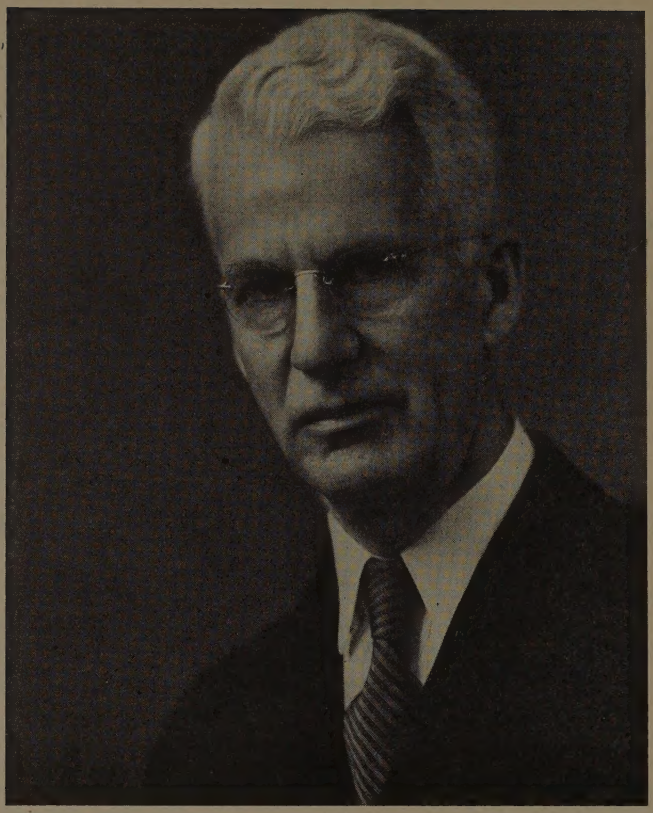

Albert W. Hull

His fellow members in The Institute of Radio Engineers will note with pleasure the elevation of Dr. Albert W. Hull to the Presidency of the American Physical Society for 1943. They have followed his career in the radio-and-electronic field since its earliest days and are aware of his major contributions to that field. The society which he now heads includes about 4000 physicists and workers in allied fields.

Dr. Hull joined the Institute in 1916, and is now a Member of that body. His notable contributions to the vacuum-tube art include the following papers to which frequent reference is made and which have appeared in the PROCEEDINGS of the I.R.E.:

"The Dynatron, A Vacuum Tube Possessing Negative Resistance," volume 6, pages 5–37; February, 1918.

"The Dynatron Detector—A New Heterodyne Receiver for Continuous and Modulated Waves," volume 10, pages 320–344, October, 1922.

"A Combined Kenotron Rectifier and Pliotron Receiver Capable of Operation by Alternating Current Power," volume 11, pages 89–97; April 1923.

Dr. Hull was born in Southington, Connecticut, in 1880. He received the degree of Ph.D. from Yale University in 1909 and the degree of Sc.D. from Union College in 1930. From 1909 to 1914 he was an instructor in physics at Worcester Polytechnic Institute, then joining the Research Laboratory staff of the General Electric Company and in 1928 rising to the post of Assistant Director of the Laboratory, which post he now holds.

His work in the field of X-ray crystal analysis won him the Howard N. Potts medal of the Franklin Institute in 1923. The many contributions made by him to existing knowledge of vacuum tubes and electronic methods led to the award to him in 1930 of the Morris Liebmann Memorial Prize of The Institute of Radio Engineers. He also holds the honorary degree of Sc.D. from Union University.

260- to 350-Megacycle Converter Unit for General Electric Frequency-Modulation Station Monitor*

H. R. SUMMERHAYES, JR.†, ASSOCIATE, I.R.E.

Summary—**The development of an ultra-high-frequency converter unit is described. This unit is used in conjunction with a General Electric frequency-modulation station monitor to measure the characteristics of frequency-modulation transmitters operating in the 260- to 350-megacycle frequency range. Particular emphasis is placed upon a discussion of the variable inductance-tuning elements which were developed for use in the ultra-high-frequency mixing stage of the converter unit.**

I. Introduction

THE constant advance of the art of radio communications has been characterized in recent years by the use of higher and higher frequencies. As the useful frequency range has been pushed upward, new circuit components and new techniques have been utilized to solve the new problems presented by these higher frequencies. Up to frequencies in the order of 300 megacycles, coils and tuning capacitors can usually be made to give sufficiently high impedances in tube circuits to enable reasonable amplification to be realized. However, at still higher frequencies the tube must be treated as an integral part of some sort of transmission-line-type structure or resonant cavity.

There is a border line of frequency somewhere in the region of 30 to 300 megacycles where it becomes uncertain for any particular application as to which type of structure, lumped constant, or distributed constant, may be used to the best advantage. In this paper an application is described in which especially designed lumped-constant variable inductors are used to tune a 260- to 350-megacycle mixing circuit. This application represents a border-line case where it is felt that the lumped-constant elements have been pushed to the maximum frequency of their usefulness and yet where they still exhibit the advantages of small size and ease of tuning over a range as compared with transmission-line structures.

The need for these special tuning inductors was encountered during the development of an ultra-high-frequency converter unit used in the 260- to 350-megacycle frequency range.

The requirements for the converter unit will be listed and then a discussion of the design will follow with particular emphasis on the mixer stage and on the variable-inductance tuners. The specifications and performance of a commercial unit will be given.

II. Requirements for 260- to 350-Megacycle Converter Unit

Frequency-modulation programs are often relayed from the studio to the main transmitter by low power, ultra-high-frequency radio-relay stations. These are the so-called ST (studio-to-transmitter) stations. The Federal Communications Commission requires that monitoring facilities be provided at these stations to indicate the center frequency and the percentage modulation of the radiated signal. Since a frequency-modulation monitor capable of accomplishing these tasks in the 42- to 50-megacycle high-frequency broadcasting band had already been developed, it was thought well to extend the usefulness of this unit by the addition of a frequency converter to enable monitoring these ultra-high-frequency studio-to-transmitter relay stations.

The studio-to-transmitter band extends from 330.4 to 343.6 megacycles but the operating-frequency range of the converter unit was designed to extend over a broader range from 260 to 350 megacycles so as to include television sound relaying and other services as well as the studio-to-transmitter service. The converter-monitor combination may be used as a companion unit to the General Electric Type GF-8-A studio-to-transmitter transmitter which uses ±75 kilocycles swing as 100 per cent modulation.

The design of the General Electric frequency-modulation station monitor establishes the 100 per cent modulation limit which can be monitored by the combined converter-monitor unit to be ±75 kilocycles frequency swing. This is what is most commonly used in these studio-to-transmitter services at the time of writing although the Federal Communications Commission allows a maximum of ±200 kilocycles swing to be used.

Considerations of the transmitter power available for monitoring and of the losses which would be encountered in a maximum of 1000 feet of radio-frequency connecting cable led to a specification of 0.3 volt root-mean-square in 72 ohms as the minimum radio-frequency power available at the input to the converter.

The tolerance on the frequency of transmitters in this service as prescribed by the Federal Communications Commission is ±0.01 per cent of the assigned frequency. This requirement applied to the maximum frequency to be monitored, 350 megacycles, fixes the frequency indication required in the converter-monitor combination at −35 to +35 kilocycles full scale with respect to the assigned frequency. Fortunately, the frequency-discriminator circuit in the existing monitor

* Decimal classification: R254×R414. Original manuscript received by the Institute, January 4, 1943.

† General Engineering Laboratory, General Electric Company, Schenectady, New York.

has a linear-detection characteristic over a band broad enough to accommodate both the normal ±75-kilocycle swing of the instantaneous frequency during modulation and also the permissible ±35-kilocycle deviation of the mean frequency of the transmitter.

It was also desired to provide in the converter unit a means for measuring relative transmitter power.

III. Principle of Operation

The main function of the converter unit is essentially very simple. It is to convert the nominal frequency of the incoming frequency-modulated wave from its original value in the ultra-high-frequency

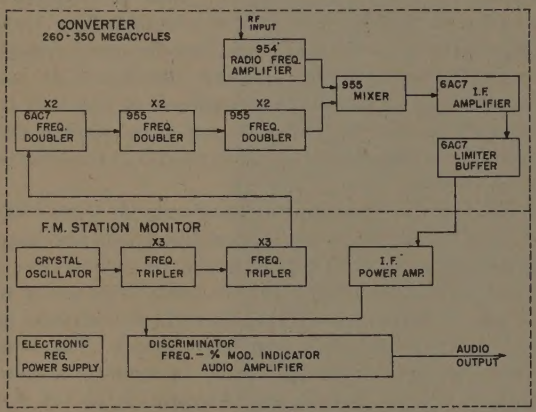

Fig. 1—Block diagram of 260- to 350-megacycle converter and frequency-modulation station monitor.

region down to 5.4 megacycles and to supply this signal to the monitor unit for measurement and indication. The frequency conversion is accomplished by heterodyning the incoming wave against the 72nd harmonic of a precision crystal oscillator which is adjusted to give exactly 5.4 megacycles frequency difference between its 72nd harmonic and the nominal frequency of the particular transmitter to be monitored. The crystal oscillator used for this purpose already exists in the monitor unit where it is followed by two frequency-tripling stages (see Fig. 1). From the second of these tripler stages, the ninth harmonic signal is supplied to the converter unit where there are three additional *L-C* frequency-doubling stages which bring the multiplied crystal frequency up to the required value for heterodyning with the incoming signal to be monitored.

The choice of three doubling stages to accomplish the frequency multiplication was determined by the available frequency range in the existing monitor stages, the range of frequency of the signals to be monitored, and the allowable degree of multiplication per stage consistent with sufficient output. The first two factors established the over-all multiplication to be approximately eight, and the last one favored the use of three doubler stages rather than two tripler stages. The ninth harmonic of the crystal frequency is transferred from the monitor unit to the adjacent converter unit by means of a short coaxial cable link joining a low-impedance tap on the tuned coil in the monitor to a low-impedance tap on a similar tuned coil at the input to the converter.

The first two doubler stages in the converter exhibit no unusual design problems; there is no difficulty in obtaining sufficiently high impedance to get good output with ordinary variable air capacitors and air-core inductance coils. A 6AC7 tube is used in the first doubler stage since the output frequencies here are relatively low (64 to 86 megacycles). In the second doubler stage, a 955 acorn-type triode tube with a very small coil and a low minimum variable air capacitance in its plate circuit is made to tune without difficulty over the 127- to 172-megacycle range. But in the next doubler stage where the frequency range in the plate circuit is 255 to 345 megacycles, the ordinary coil and capacitor tuning methods break down because their minimum inductance and capacitance are too high, especially when means are also provided here for mixing the input signal with the output of the final doubler. The design of the mixing stage will be considered in a succeeding section.

Following the mixer stage is a grid-rectifying type 955 acorn-tube detector which causes the 5.4-megacycle intermediate-frequency signal to appear across its plate load. It is to be remembered in this connection that the process of heterodyning does not affect the bandwidth of the incoming frequency-modulated wave so that the frequency swing remains unchanged after conversion to 5.4 megacycles.

The plate circuit of the 955 detector is coupled to the grid of the next stage through a broad-band, tuned-intermediate-frequency transformer.

This next stage gives amplification sufficient to produce limiting action by simple overload of the grid circuit of the output tube. The intermediate-frequency signal is then coupled from the plate circuit of the output tube back into the monitor unit through a short length of low-capacitance cable in parallel with 350 ohms plate-load resistance. This impedance combination has a flat frequency characteristic over the required bandwidth at 5.4 megacycles.

In the monitor unit the functions of measuring and indicating percentage modulation and mean carrier frequency and of providing audio output are performed.[1]

IV. Radio-Frequency Amplifier Stage

Other factors besides the very high-frequency requirement in the mixing stage add to the difficulty of the design. One of these factors is the requirement of indicating relative transmitter output level. As previously mentioned, the specified radio-frequency operating level for the converter is 0.3 volt root-mean-square

[1] H. R. Summerhayes, Jr., "A frequency-modulation station monitor," Proc. I.R.E., vol. 30, pp. 399–404; September, 1942.

across 72 ohms. The method which first presents itself for measuring the level of this signal is to terminate the incoming transmission line with a properly matched, tuned, radio-frequency transformer to step up the voltage to a value more suitable for measurement with a grid-rectifying-type vacuum-tube voltmeter. However, the gain of such a transformer is quite limited, due to the grid loading effects of dielectric losses, cathode lead inductance, and transit time. These factors all operate to decrease the high-frequency input resistance of tubes to values far below their low-frequency resistance. The input resistance of a Type 954 acorn pentode at 350 megacycles is probably in the order of 1000 ohms due to these factors. Thus, the maximum theoretical voltage gain is only in the order of $\sqrt{1000/72}$ or about 3.7 unless recourse is made to an elaborate bridge circuit for neutralizing input conductance. Furthermore, the physical size and shape of such an input transformer is such as to make its performance difficult to predict and even more difficult to measure.

Any mechanically reasonable tuning capacitor tends to have too high a minimum capacitance to tune with a mechanically reasonable inductance coil. Lead inductance gets to be more important than the coil inductance. The frequency range is approaching the border line beyond which it is no longer meaningful to talk about, or fruitful to use, lumped-constant circuit elements.

These considerations indicated that the testing procedure involved in lining up a properly matched, tuned step-up transformer over the required frequency range would be too costly to justify the relatively small voltage gain which could be realized. Thus, it was decided to omit the input transformer and to provide approximate radio-frequency signal-level indication by terminating the input cable in a 72-ohm resistor followed directly by a simple grid rectifying-type vacuum-tube voltmeter (see Fig. 2). Since the zero-signal, initial electron velocity bias of this tube may be an appreciable part of the voltage to be measured and since this bias is affected by changes in cathode temperature and by ageing, a front panel control is provided for resetting the zero-level indication.

In addition to providing an indication of relative radio-frequency signal level, this tube also acts as a buffer or impedance changer for the incoming signal. This stage has a voltage gain of 0.5 from grid to plate.

V. Mixing Stage

It is now in order to consider the means of mixing the incoming radio-frequency signal and the crystal-oscillator multiplier signal and the means of coupling them into the detector. Here again in the mixing stage, as previously in the radio-frequency amplifier stage, we are confronted with a low tube-input resistance, this time due to the 955 detector-tube input. But even more hampering than this loading effect is the difficulty of tuning the combined capacitances of the tubes involved in the mixing process, i.e., the output capacitances of the multiplier and radio-frequency amplifier tubes and the input capacitance of the detector tube. The sum of these capacitances with some additional allowance for wiring capacitance is approximately 9 micromicrofarads. This has a reactance of only 50 ohms at 350 megacycles. The shunt inductance required to tune this capacitance is 0.023 microhenry

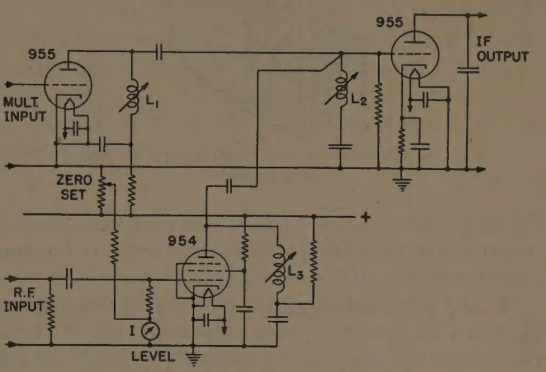

Fig. 2—260- to 350-megacycle mixing stage.

and when it is realized that a single turn of No. 18 copper wire $\frac{1}{2}$ inch in diameter has this much inductance, it is easy to visualize the difficulties in obtaining resonance. Clearly no such single-turn coil can be expected to tune the capacitances of all three tube elements since the distance between the tubes is necessarily such as to create inductive loop impedances of the same order of magnitude as that of the single tuning coil itself.

And yet, in spite of these limitations, it was felt that it would be much easier to accomplish the mixing by simply connecting together the tube elements rather than by a tuned mixing transformer or a tuned line. Analysis like the above and experiments indicated that this result could only be accomplished by tuning each tube capacitance separately with some sort of shunt inductance which must be variable in order to cover the required range. Accordingly, three specially designed variable inductors were used in the mixing stage, one of each connected as directly as possible from each tube element involved and thence through a tiny blocking capacitor to the metal chassis ground. The inductors are shown as L_1, L_2, and L_3 in Fig. 2, which is a schematic of the mixing stage.

The success of this solution was largely dependent upon the special design features of the inductors, features which result in extremely low minimum inductance and in relative ease of construction. A perspective view of the essential parts of one of the inductors is shown in Fig. 3. The design of these inductors is a modification and development of an earlier receiver-inductor design. The inductors consist essentially of a standard variable air capacitor in which the central

portion of the stator plates has been removed, leaving only the outer edges. Thus, each stator plate forms a one turn coil. The inductance may then be progressively reduced by turning the rotor plates to increase the coupling, thereby introducing in effect a short-circuited secondary turn on each side of the stator in-



Fig. 3—Perspective view of main parts of special tuning inductor.

ductance turn. Several stator turns may be connected in parallel to reduce inductance or in series to increase inductance. Fig. 3 illustrates the series connection.

At 350 megacycles, all three parallel connected inductors tune near minimum inductance, i.e., with the rotor plates rotated nearly all the way in. From 350 down to 300 megacycles resonance is obtained by adjusting each inductor to the proper value. Although several combinations of settings of the three are possible, there is in general only one combination which gives a maximum output at any particular frequency. From 300 down to 260 megacycles, resonance is obtained by disconnecting one of the inductors, thus increasing the total inductance of the parallel combination. Adjustment of the two remaining ones will then give resonance in this lower part of the frequency range.

The losses in the mixing stage cause the resonance to have a broad enough impedance maximum to include, without additional damping, both the local oscillator signal and the incoming signal. However, this is not surprising since these signals are only separated in frequency by 1.5 to 2 per cent.

The multiplier signal appearing at the detector grid has a peak value of 2.6 volts and the radio-frequency signal from the buffer amplifier tube appearing simultaneously at the detector grid has a peak value of 0.25 volt for 0.5-volt peak input to the radio-frequency amplifier stage.

VI. Description of Commercial Unit

Figs. 4 and 5 show top and bottom views, respectively, of the chassis of the commercial converter unit. Fig. 6 shows a front view of the combined converter and monitor units mounted one above the other as they are supplied in a standard cabinet.

Plate power for the converter unit is obtained from the electronically regulated supply which is part of the monitor unit. The power-supply section in the monitor was originally designed with this objective in mind. The modifications necessary in the monitor to adapt it to this service are the addition of one regulator tube in the space provided, the change in the radio-frequency input connections, and the change of the sensitivity and the scale marking of the frequency indicating instrument.

The design of the original monitor unit was such as to insure adequate stability and precision of frequency indication for transmitter signals in the range of 42 to 50 megacycles. In this range the full-scale mean-frequency deviation indication is only ± 2000 cycles

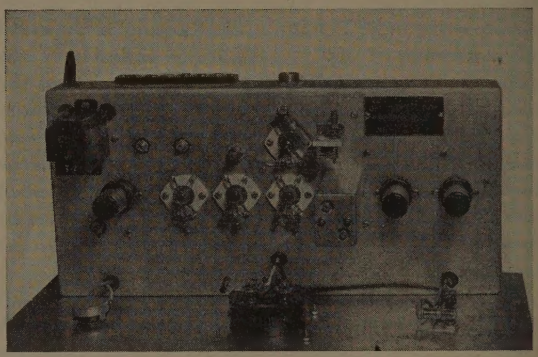

Fig. 4—Top view of chassis of General Electric converter unit.

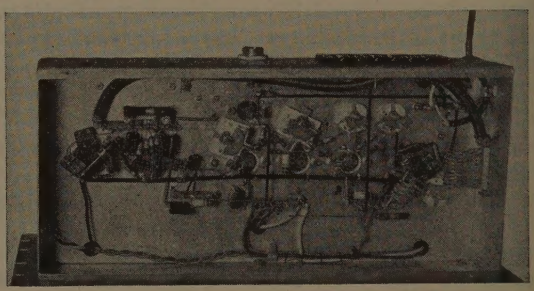

Fig. 5—Bottom view of chassis of General Electric converter unit.

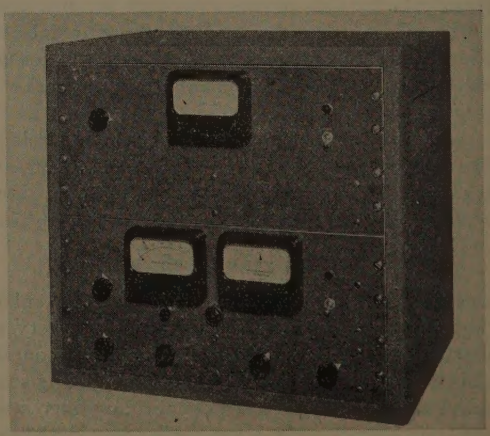

Fig. 6—Front view of General Electric converter unit and General Electric frequency-modulation station monitor unit in cabinet.

which corresponds to ±50 microamperes change in discriminator output average current. When the monitor unit is used in combination with a converter unit to indicate frequency drifts of ±35,000 cycles, the only change required in the frequency-discriminator circuit consists in a proportionate decrease in the full-scale current sensitivity of the indicating instrument from ±50 microamperes to ±875 microamperes. The stability of the discriminator circuit is, of course, represented by the same number of microamperes or cycles indication in each application but in the converter application, the stability in terms of percentage of full-scale frequency indication is 17½ times better than in the monitor application.

This results in extremely good stability of the frequency indication (about 1 per cent of full scale) as far as this is affected by drifts in the constants of the discriminator circuit. Thus, it is only infrequently necessary to use the built-in calibrating crystal oscillator to check the discriminator-frequency indication.

The service record on those units installed prior to the inauguration of the priority system for the procurement of material has been entirely satisfactory.

Acknowledgment

The author would like to acknowledge the help and co-operation of his associates in the General Engineering Laboratory of the General Electric Company and in particular of W. A. Ford in the development of the tuning inductors.

A Method of Measuring the Effectiveness of Electrostatic Loop Shielding*

DUDLEY E. FOSTER†, MEMBER, I.R.E., AND CHARLES W. FINNIGAN‡, ASSOCIATE, I.R.E.

Summary—**In the design of radio receivers employing electrostatically shielded loops, difficulty in measuring the effectiveness of the loop shielding in the laboratory is usually encountered. This paper describes a method using a short rod antenna connected to a conventional standard-signal generator which has been found to be convenient to operate and capable of producing consistent results.**

The effectiveness of shielding is determined as the ratio of the effective height of the loop as a magnetic field collector to its effective height as an electric-field collector.

Introduction

ELECTROSTATIC shielding of loop antennas is efficacious in decreasing electrical noise interference in many instances. The desired broadcast signal, being a radiation field, has equal magnetic and electric components. On the other hand, the noise source, being close to the receiving location, is predominantly an induction field. The ratio of electric to magnetic component of the induction field depends upon the type of radiator and the majority of noise sources have a predominant electric component. Consequently, reduction of the pickup of the electric field by shielding greatly decreases the noise effect on the receiver.

Radio-compass shielded loops are designed for the ultimate in noise reduction, but such complete shielding is generally unnecessary in broadcast receivers. In order to secure the most economical shielding that is effective in reducing the induction pickup, a test of the shielding is necessary. It is desirable that the test method be applicable in the laboratory where conditions can be controlled and results duplicated, rather than in the field where signal and noise conditions may both vary. This paper describes a method which has been found to be the most satisfactory of five methods tested in determining the effectiveness of loop shielding.

* Decimal classification: R201.5. Original manuscript received by the Institute, June 23, 1941; revised manuscript received, February 8, 1943.

† Formerly, RCA License Laboratories, New York, N. Y.; now, Majestic Radio and Television Corporation, Chicago, Ill.

‡ Formerly, RCA License Laboratories, New York, N. Y.; now, Stromberg-Carlson Telephone Manufacturing Company, Rochester, N. Y.

Description of Test Method

The extent to which a tuned loop antenna responds to the influence of an electric-field component of an electromagnetic wave may be designated as its effective height with regard to the electric component. Designating that effective height h_e, it may be defined by

$$h_e = \frac{V}{EQ}$$

where

V = the voltage developed across the loop circuit
E = the electric-field intensity
Q = the circuit figure of merit

The value of h_e is a direct measure of the effectiveness of the loop shielding. Unfortunately the electric field from either local or distant sources is subject to wide variations inside the laboratory, so that h_e is not easy to evaluate directly.

The effective height of the loop with regard to the magnetic component of the field may be designated h_h, as the effective height for the electric component is

designated h_e. For geometrically simple loops h_h may be readily computed, while for more complex types h_h may be measured without difficulty by known laboratory methods.

Since h_e is a measure of the undesired pickup of the loop and h_h a measure of the desired pickup, the factor of merit of a loop as to its noise-reducing properties may be expressed by the ratio h_h/h_e. The method described herein is one which has been found best adapted to laboratory determination of that ratio.

The magnetic field from a coil may be used in the laboratory with little disturbance of its calculated performance due to surrounding objects. Experience with electric fields in the laboratory however, has indicated that they are much more susceptible to field distortion. The use of an artificial ground plane with all the apparatus except the radiator and loop under measurement located beneath the plane, and with relatively small spacing between the radiator and loop, have been found to be the best means of providing a uniform and reproducible field. A vertical rod antenna projecting through the ground plane and connected directly to a signal generator provides a suitable radiator.

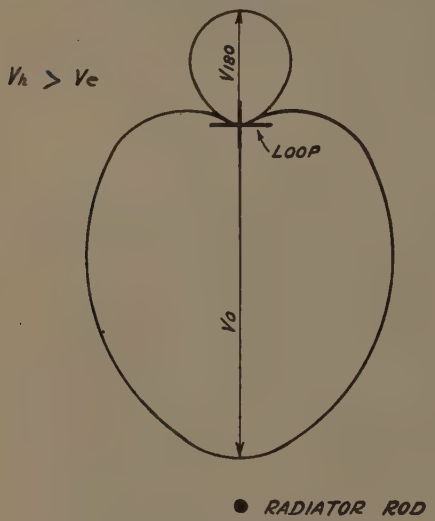

Fig. 1—Polar pattern of loop voltage, electromagnetic-field layer.

In the field from a vertical radiator, the electric-field vector E is vertical and the magnetic-field vector H is horizontal. Near the radiator, where the induction field is predominant, the magnitude of E is much greater than H for such a radiator. A large ratio of E to H is desirable when measuring the effectiveness of shielding so that small differences in shielding may be observed.

At the higher frequencies the area of predominant induction field is greatly reduced because of the relatively greater radiation field. This, in conjunction with the afore-mentioned distance requirement, limits the usefulness of the method to the lower frequencies. Successful measurements are possible, however, up to at least 3 megacycles.

The ratio of E to H is not constant but is a function of the distance from the rod, decreasing as the distance becomes greater. From this standpoint, operation with the loop near the rod is desirable, but if too close, slight displacement of the apparatus will cause large variations in the field intensity, with consequent inaccuracy of measurement. Likewise, there is an error in determining the magnetic component in a field which varies appreciably in the distance of a loop width. A distance of a few loop diameters should therefore be used for best accuracy of measurement.

In the induction field near a rod radiator E and H are in time quadrature. Under this condition the resulting loop voltages Eh_e and Hh_h will be in time phase.

As the loop is rotated the resonant voltage at its terminals is given by

$$V = (Eh_e + Hh_h \cos\theta)Q \qquad (1)$$

where θ is the angle between the direction of the magnetic field and the plane of the loop. For angles greater than 90 degrees, cos θ is negative, so that the voltage due to the second term in the parentheses opposes that due to the first term.

Let

$$Eh_e = V_e \qquad (2)$$

$$Hh_h = V_h. \qquad (3)$$

Then, if $V_e = 0$ the variation of loop voltage with rotation takes the form of the familiar double-lobed pattern, with two equal voltage maxima occurring when θ is 0 degrees and when θ is 180 degrees. If V_e is not zero but is smaller than V_h the pattern is two-lobed but with unequal maxima. If V_e is equal to V_h the loop becomes unidirectional with one maximum and one minimum. If V_e is larger than V_h the pattern has only one lobe but has no angle where the terminal voltage becomes zero.

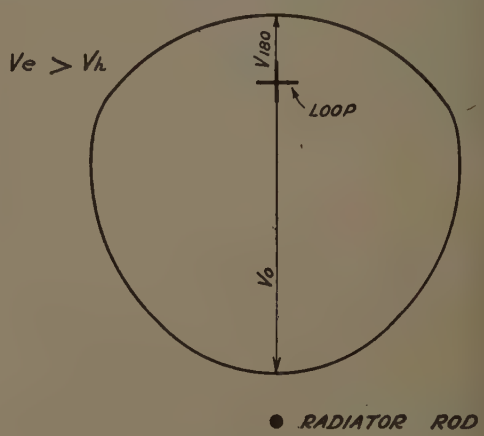

Fig. 2—Polar pattern of loop voltage, electric-field voltage layer.

. The condition when $V_h > V_e$ is shown in Fig. 1 and when $V_e > V_h$ in Fig. 2. From the voltage relations at 0 degrees and at 180 degrees the ratio of V_h to V_e may be found and when E and H are known h_h and h_e may be calculated. For the condition shown in Fig. 1, where the voltage due to the magnetic component is larger than that due to the electric component,

$$\frac{h_h}{h_e} = \frac{V_0 - V_{180}}{V_0 + V_{180}} \cdot \frac{E}{H} \tag{4}$$

and for the condition of Fig. 2, where V_e is larger than V_h,

$$\frac{h_h}{h_e} = \frac{V_0 + V_{180}}{V_0 - V_{180}} \cdot \frac{E}{H} . \tag{5}$$

These expressions show that a relative measure of shielding effectiveness as given by the ratio h_h/h_e may be obtained without knowing E and H specifically, since the ratio E/H is a constant multiplying factor. In order to obtain an absolute value for h_h/h_e it is necessary to know the ratio E/H. The value of H may be obtained by measurement using a calibrated, totally shielded loop. The value of E may be determined with a field-intensity meter using a rod antenna.

Arrangement of Apparatus

The general setup of apparatus for measuring efficiency of loop shielding is depicted in Fig. 3. The ground plane is necessary and may consist of screen wire on a light framework. A screen $3 \times 4\frac{1}{2}$ feet has been found satisfactory with a separation between the rod and loop of 4 feet. The ground plane should not be smaller than this.

A separation of 4 feet between rod and loop has been found to be a good distance for ordinary size receiving loops. The rod may be of the order of 2 or 3 feet long. With a rod 1 meter long and a 4-foot separation a ratio of E/H of 13.5 to 1 was measured.

The loop under measurement is connected to the input terminals of the calibrated receiver. It is important that the leads from the receiver to the point of connection of the loop be shielded by means of a brass or copper pipe. The loop must be rotatable through 180 degrees at least, and it has been found convenient to have a disk about 1 foot in diameter, rotating with the loop, to act as a support.

The receiver should be provided with an indicating meter, preferably one operating on carrier. It need not be calibrated as the signal-generator voltage may be used as a measure of V_0 and V_{180}. Furthermore the receiver need only maintain constant gain for sufficient period of time to read V_0 and V_{180}.

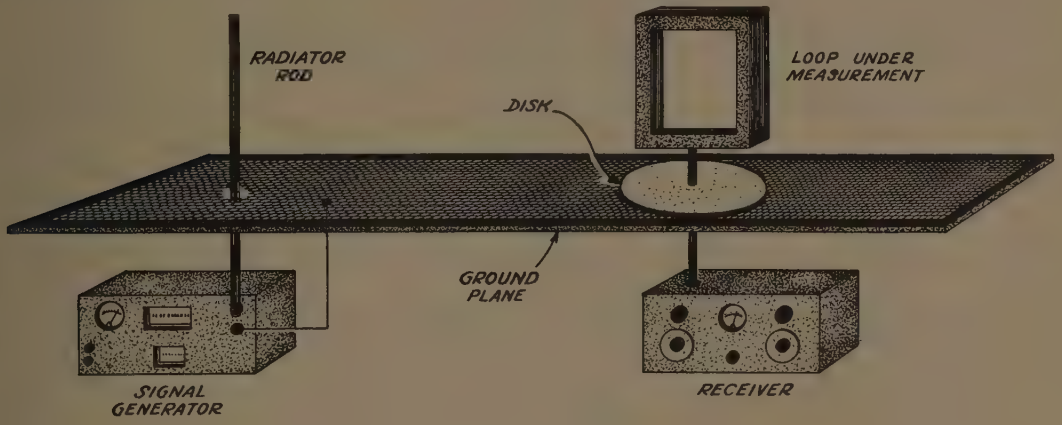

Fig. 3—Setup of apparatus.

Technique of Measurement

With the apparatus arranged as in Fig. 3 the loop is rotated through 360 degrees; if the loop voltage drops to substantially zero at two angles, $V_h > V_e$ and expression (4) should be used, whereas if the loop voltage does not drop to zero with rotation, $V_e > V_h$ and expression (5) applies. The loop is then rotated to obtain maximum voltage, which is V_0, then rotated 180 degrees to find V_{180}. Reversal of loop polarity also changes the relative sign of V_e and V_h, but usually does not give the same results as rotation because of the increased shielding effect when the outside turns are connected to ground.

Reference

(1) Stanford Goldman, "A shielded loop for noise reduction in broadcast reception," *Electronics*, vol. 2, pp. 20–22; October, 1938.

Variable-Frequency Bridge-Type Frequency-Stabilized Oscillators*

W. G. SHEPHERD†, ASSOCIATE, I.R.E., AND R. O. WISE†, NONMEMBER, I.R.E.

Summary—**Results are given of a theoretical and experimental investigation into two types of bridge-stabilized oscillators incorporating a thermal device for amplitude control. One circuit employs only resistances and capacitances in the frequency-determining network and consequently is useful for low-frequency operation. The other circuit uses an inductance-capacitance network which is well adapted to the higher-frequency network. Conditions for optimum stability and the variation of the stability with frequency determined experimentally are found to be in general agreement with theoretical results.**

INCREASING precision of measurements has necessitated the development of variable-frequency oscillators of greatly improved frequency stability and reduced harmonic content. Many of the means employed in achieving these desirable characteristics for fixed-frequency oscillators cannot be adapted to oscillators of wide frequency range in which requirements of constancy of output, simplicity of control, portability, and ease of construction must be met.

In achieving frequency stability it is of course necessary that circuit elements be chosen which are affected as little as possible by temperature and humidity. Even assuming ideal circuit elements, however, variation in frequency with supply voltage and with unavoidable changes in transconductance of tubes will remain in most variable-frequency oscillators. It is this variation in frequency with gain which constitutes the circuit problem in the design of wide-range frequency-stabilized oscillators and to which a solution is presented in this paper.

In many oscillator investigations undertaken in the past a complete solution of the circuit problem has been found impossible because of the complication introduced by the nonlinearity of the vacuum tubes in the oscillator. Recently, however, the separation of the functions of amplification and amplitude limitation has made it possible to treat any oscillator so controlled as a linear-network problem and thereby to obtain complete expressions for the conditions and stability of oscillation. The present work deals with two oscillators of this type.

Early efforts in the direction of improved oscillator circuits attempted to refine the method of amplitude limitation. One of the first of these was the use of a grid leak and condenser which provide an automatic bias for the oscillator tube. Such an arrangement tends to reduce the nonlinear behavior required of the grid circuit in comparison with that necessary for the case of a fixed bias. The grid leak and condenser do, however, require that grid current be drawn which results in the production of harmonics. Furthermore, the tube input and output impedances depend to a considerable extent on the supply voltages which in turn affect the oscillating circuit. Some of the methods[1] undertaken to eliminate these effects consisted principally in providing sufficient loss between the tube and the oscillating circuit so that the effect of changes in the impedances of the tube on this circuit were reduced more or less in the ratio of the amount of loss allowable.

Llewellyn has indicated[2] how it is possible to improve the stability of oscillators under certain conditions by including appropriate impedances in the grid or plate circuits or both. These impedances were such as to reduce the phase shift in the oscillating circuit to zero at the operating point. The analysis however is limited in that it assumes that the oscillating circuit offers a negligible reactance to any harmonics generated. It is also necessary in most cases to change these impedances with frequency which complicates the networks.

In recent years many investigators[3–6] have recognized that harmonics produced by the nonlinear behavior of the tubes affect the frequency of oscillation. This effect occurs since any changes in the supply voltages which produce relative changes in the amplitude of the harmonics will cause a change in the reactance at the fundamental frequency and hence a shift in that frequency.

Moullin[4] proposed to eliminate the harmonic effects by building up the oscillating circuit in such a fashion that the harmonics were short-circuited. This work was applied particularly to a dynatron oscillator but the same results should apply equally well to a triode or pentode oscillator. Moullin found that the residual instability which remained could be blamed principally upon the changes in the interelectrode capacitances with the supply voltages.

Arguimbau[3] recognized the effect of harmonics and proposed to eliminate them by operating the vacuum

* Decimal classification: R355.9×R133. Original manuscript received by the Institute, March 2, 1942; revised manuscript received, January 30, 1943. Presented, Winter Convention, New York, N. Y., January 13, 1942.

† Bell Telephone Laboratories, Inc., New York, N. Y.

[1] J. W. Horton, "Vacuum tube oscillators—A graphical method of analysis," *Bell Sys. Tech. Jour.*, vol. 3, pp. 508–524; July, 1924.

[2] F. B. Llewellyn, "Constant frequency oscillators," PROC. I.R.E., vol. 19, pp. 2063–2094; December, 1931.

[3] L. B. Arguimbau, "An oscillator having a linear operating characteristic," PROC. I.R.E., vol. 21, pp. 14–28; January, 1933.

[4] E. B. Moullin, "The effect of the curvature of the characterstics on the frequency of the dynatron generator," *Jour. I.E.E.* (London), vol. 73, pp. 186–195; September, 1933.

[5] J. Groszkowski, "Oscillators with automatic control of the threshold of regeneration," PROC. I.R.E., vol. 22, pp. 145–150; February, 1934.

[6] C. J. Bakker and C. J. Boers, "On the influence of the nonlinearity of the characteristics on the frequency of dynatron and triode oscillators," *Physica*, vol. 3, pp. 649–665; July, 1936.

tube as a linear amplifier. This was done by rectifying a portion of the output to furnish grid bias to the vacuum tube in order to limit the amplitude. This accomplishes the effect of the grid leak and condenser without the disadvantage caused by grid current. A somewhat similar idea was suggested later by Groszkowski[5] who used an automatic volume control to maintain a dynatron oscillator at the optimum operating condition on the threshold of oscillation. While both of these are steps in the proper direction they are still open to the objection that in order to control the amplitude a tube parameter, namely the grid bias, must be varied, leading to associated changes in the tube capacitances.

Meacham[7] has recently proposed a fundamental improvement in oscillator design which has led to a remarkable betterment in performance. By utilizing a thermal element as an amplitude control the nonlinearity of the amplifier becomes an unnecessary evil, since the amplitude limitation is completely external to the amplifier. When the thermal element is suitably chosen for the frequencies involved, it is a quasilinear circuit component so that disturbing harmonics are not produced.

In addition to attaining the possibility of linear operation of the vacuum tubes, Meacham used a bridge network to determine the frequency of the oscillator. By incorporating the control as a component of the bridge he was then able to make use of the full gain of the amplifier. The bridge network has the property that the Q of the coil is multiplied by the gain of the amplifier. Hence any changes in the gain or phase of the amplifier produce a minimum of frequency variation. Thermal control, moreover, eliminates changes of the tube capacitances which are inherent in automatic volume control involving vacuum tubes. With these improvements Meacham has constructed fixed-frequency oscillators whose stability compares with the best standards available.

Scope

This paper discusses variable-frequency oscillators which function in a manner similar to those described by Meacham but employing electrical-frequency-determining networks better adapted to the necessity of covering a range of frequencies. It should be realized that the requirement that an oscillator cover a range of frequencies imposes difficulties not present for fixed-frequency oscillators. Thus, at a fixed frequency it is a relatively simple matter to adjust the phase shift in the amplifier to an optimum value while over a wide range of frequencies elaborate circuits become necessary. In addition, physically larger elements are necessary because of the variability requirement so that larger parasitic capacitances may be expected. It must be accepted, therefore, that the stability of the oscillators to be discussed will be considerably inferior to the stability which can be achieved with single-frequency networks. However, while the discussion which follows considers these circuits from a variable-frequency standpoint it will be seen that they may be employed for fixed-frequency applications and under such circumstances are capable of a very high degree of stability.

The circuits employed are two examples of a class of bridged-T and parallel-T circuits whose advantages have been discussed recently by Tuttle[8] and Honnell.[9] One of the circuits employed is particularly applicable to low frequencies because only capacitances and resistances are employed. This is a major advantage at low frequencies where it is usually necessary to use large coils which are much less stable than those used at high frequencies. This results from the fact that they must either be very bulky or use iron cores. In the latter case the inductance may be a function of the current density. It is possible, however, to obtain resistances which are as stable as the best coils available for high frequencies so that this network offers the possibility of much better performance at low frequencies. The other network has a capacitance-inductance frequency-determining network which may be adapted to any frequency range. In the present work it has been applied particularly to frequencies above the audio range. The two types of oscillators together cover a frequency scale from a few cycles per second to several megacycles per second. In each circuit the amplitude is controlled by means of a thermal device which is an element of the network. This amplitude control permits the analysis of these circuits to be made by linear-circuit methods.

In the following, the general operating conditions for the oscillators will be considered. A theory for the frequency stability of these oscillators for conditions of large amplifier gain and for the low-frequency oscillator under actual operating conditions has been developed. The results of a comparison of the theoretical results with those obtained with experimental oscillators will be shown. A description will be given of oscillators for laboratory use which were adapted and modified from the experimental models.

Oscillator Circuits

The circuit schematics for the two types of oscillators are shown in Figs. 1 and 2. Fig. 1 shows a resistance-capacitance parallel-T network which for brevity will be referred to as the *CR* oscillator. A similar parallel-T network has been described by Augustadt[10] for use as a filter and by Scott[11] for use

[7] L. A. Meacham, "The bridge-stabilized oscillator," PROC. I.R.E., vol. 26, pp. 1278–1294; October, 1938.

[8] W. N. Tuttle, "Bridged-T and parallel-T null circuits for measurements at radio frequencies," PROC. I.R.E., vol. 28, pp. 23–29; January, 1940.

[9] P. M. Honnell, "Bridged-T measurement of high resistances at radio frequencies," PROC. I.R.E., vol. 28, pp. 88–90; February, 1940.

[10] U. S. Patent 2,106,785.

[11] H. H. Scott, "A new type of selective circuit and some applications," PROC. I.R.E., vol. 26, pp. 226–235; February 1938.

as a selective analyzer and, with the addition of another regenerative path, as an oscillator circuit. In the network as used in the present case the elements are so altered as to make any additional path unnecessary, and further, one of the elements is made a function of the oscillating amplitude so as to provide automatic amplitude control. This control adjusts the feedback

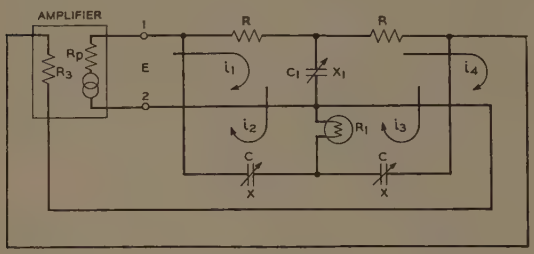

Fig. 1—Schematic circuit diagram of capacitance-resistance parallel-T oscillator.

to the proper value so that the tube functions as a linear amplifier, resulting in better frequency stability.

Fig. 2 shows a bridged-T type of network which will be referred to as the *LC* oscillator. This circuit which is well adapted for high-frequency oscillators has characteristics somewhat better but similar to those of the *CR* circuit. The schematic indicates that the shunt resistance is a thermally controlled resistance which automatically balances the feedback and controls the amplitude. Another circuit arrangement which has the same type of loss and phase characteristic is obtained by employing a fixed resistance in place in the thermally variable element R and using as an amplitude control a thermal element indicated by R_T and connected as shown by the dashed lines. The amplitude controls R_T and R must have opposite thermal char-

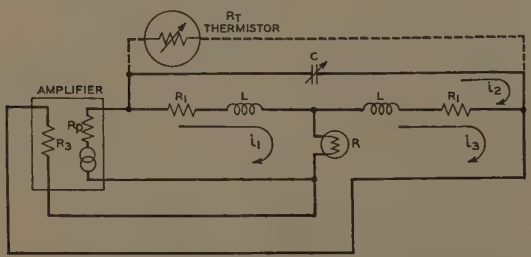

Fig. 2—Schematic circuit diagram of bridged-T oscillator.

acteristics. For reasons which will be mentioned later the circuit employing the control R_T is the more useful for variable-frequency applications of the *LC* oscillator.

The phase and attenuation characteristics of the two types of networks are similar. Sample characteristics for purposes of illustration are given in Figs. 3 and 4 for the parallel-T network of Fig. 1. In this case for a critical value of the shunt resistance the network offers an infinite loss to the frequency for which the phase shift is 180 degrees. For all values of this resistance less than the critical value the loss of the 180-degree point is finite and its value depends upon how nearly the critical condition is approached. The phase shift passes through 180 degrees at the critical frequency for a shunt resistance less than the critical value, but for larger resistances the phase shift passes through zero. In order to make the circuit automatic

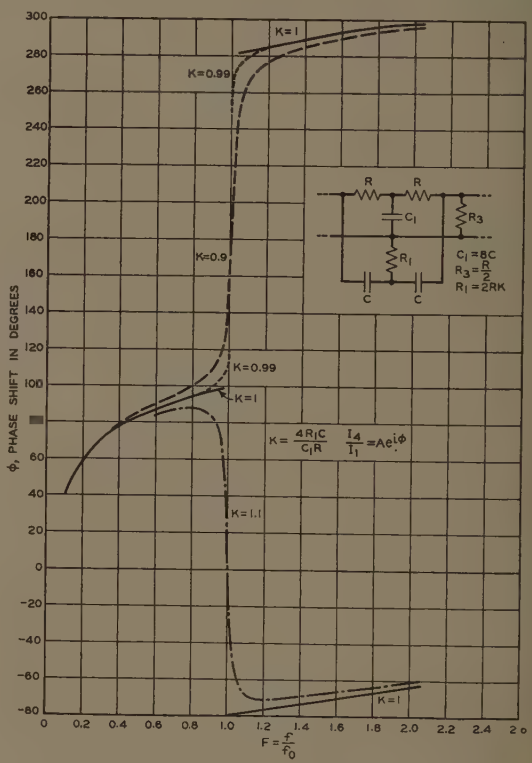

Fig. 3—Phase characteristic of parallel-T network.

the shunt-resistance arm is an element whose resistance increases with temperature. The cold resistance must be sufficiently low so that the network loss is less than the amplifier gain at the 180-degree phase point. The amplifier phase shift is assumed to be nearly 180 degrees. From Fig. 4 it will be noticed that the network loss at frequency f_0 increases with increasing shunt resistance. Thus when the amplifier is turned on, oscillations build up, simultaneously increasing the shunt resistance until the network loss is just equal to the amplifier gain.

One of the most desirable features of circuits having these characteristics, as will be apparent from these figures, is that all harmonics are fed back degeneratively; that is, in such a manner as to reduce their net value over that present with no feedback. Since the

generated harmonics are at a very low level as a result of the linear operation of the amplifier, this further reduction by feedback results in a very nearly sinusoidal output.

It is useful to consider the conditions which lead to a null for transmission through the networks. For a reasonable amplifier gain these conditions will be approximately satisfied when oscillation occurs. Also, the expressions which result are useful in understanding the operation of the circuits. Table I lists the important conditions for an infinite transmission loss through the networks. The plus or minus signs of (1) indicate that the same behavior may be obtained with either inductances or capacitances. If one assumes the more useful case for a variable-frequency oscillator that all the reactances are capacitive, (1) may be solved for

TABLE I

RC $i_3/i_1=0$ Positive Coefficient Control	LC $i_3/i_1=0$	
	Positive Coefficient Control	Negative Coefficient Control
$X=\pm\sqrt{2RR_1}$ (1)	$R_0 \cong \frac{Q p_0 L}{2}$ (5)	$R \leqq \frac{Q_0' p_0 L}{2}$ (5a)
$X_1=2\pm\frac{R^2}{\sqrt{2RR_1}}$ (1)	$f_0^2 \cong \frac{1}{8\pi^2 LC}$ (6)	$f_0^2 \leqq \frac{1}{8\pi^2 LC}$ (6a)
$f_0=\frac{1}{2\pi R\sqrt{2C_1C}}$ (2)	$Z_{in} \cong Q p_0 L$ (7)	$R_{T_0} \cong \frac{4R}{1-\frac{2R}{Q_{L0} p_0 L}}$ (6b)
$R=K\frac{RC_1}{4C}$ (3)		
$K=1$ for null $K<1$ for oscillation		
$Z_{in}=\frac{R\left(1-j\sqrt{\frac{2C}{C_1}}\right)}{\left(1+\frac{2C}{C_1}\right)}$ (4)		
where X and X_1 are the reactances of the series and shunt capacitances at null frequency f_0. Z_{in} is the impedance appearing between the input terminals at null frequency	R_0 = value of R for a null p_0L is the reactance of each coil at the null frequency f_0 $p_0=2\pi f_0$ R_1 = resistance of each coil $Q=\frac{pL}{R_1}$	R_{T_0} = thermistor resistance for a null R = value of shunt resistance which must be less than R_0 if R_{T_0} is to be finite $Q_0'=\frac{Q_{C0}Q_{L0}}{Q_{L0}+Q_{C0}}$ $Q_{C0}=R_{T0}p_0C$ $Q_{L0}=\frac{p_0L}{R_1}$

the frequency of the transmission null f_0, given by equation (2), which is for practical purposes the frequency of oscillation. The equations (1) may also be combined to give the condition for a null in terms of the circuit constants, as expressed by (3) when $K=1$.

From (2) it is seen that the frequency of oscillation may be varied by changing R, C_1, or C. The amplitude of oscillation will be determined by the value of R_1 required to make the loss through the bridge just equal to the gain of the amplifier. This gain should be constant over the frequency range. The value of R_1 then depends upon the circuit constants and the amplifier gain. Thus, if the frequency is varied by changing C, C_1, or R individually, R_1 will be a function of frequency. This is true first because the value of R_1 to produce a given loss in the network will be changed and second because the input impedance of the network as given by (4) will be altered and produce a variation in the amplifier gain which must be balanced by the network loss. If the frequency is varied by changing the capacitances simultaneously with a fixed ratio between them

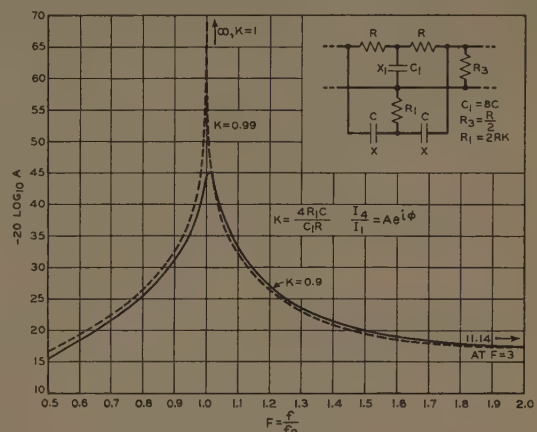

Fig. 4—Loss characteristic of parallel-T network.

and a constant value for R, then both the control resistance R_1 and the input impedance Z_{in} will be independent of frequency. It may be demonstrated also that the attenuation-phase characteristics of the circuit depend only on the ratio of these capacitances. As a result, the fundamental and harmonic levels and frequency stability of the oscillator will be independent of the frequency, provided that the amplifier characteristics are independent of frequency. For some applications it may not be advantageous to vary frequency by capacitance variation but to change R instead. In order to do this a wide-range control resistance is required which is very sensitive to current changes. Such resistances will be discussed in a later section.

A typical set of phase characteristics for the bridged-T oscillator with a positive temperature-coefficient control at R is given in Fig. 5. It may be noted that when R is zero the circuit becomes a Hartley oscillator, the phase characteristics of which are also shown on Fig. 5. The rate of change of phase with frequency is much more rapid for the bridged-T oscillator than for the Hartley oscillator. As a result any changes in the amplifier phase shift will have less effect than in the Hartley circuit. A circuit with similar characteristics which degenerates into a Colpitts oscillator is obtained by exchanging inductance for capacitance and vice versa.

For the LC oscillator the problem of maintaining a constant amplitude over a range of frequencies is more difficult than in the case of the CR circuit. The value of the control resistance of the positive thermal-coefficient type necessarily varies with frequency unless the

Q of the coil varies inversely with the frequency. The difficulty is especially serious for this type of resistance since the most suitable of these which are readily available require relatively large changes in amplitude to produce the necessary resistance variations. For this reason the circuit utilizing the negative temperature-coefficient resistance R_T is more advantageous. The resistance R is then fixed at a value sufficiently below the null value so that the gain around the loop is greater than zero. The parallel-T network with a fixed shunt resistance R feeds back the fundamental regeneratively while the resistance shunting the coil supplies a degenerative feedback just sufficient to satisfy the conditions for oscillation.

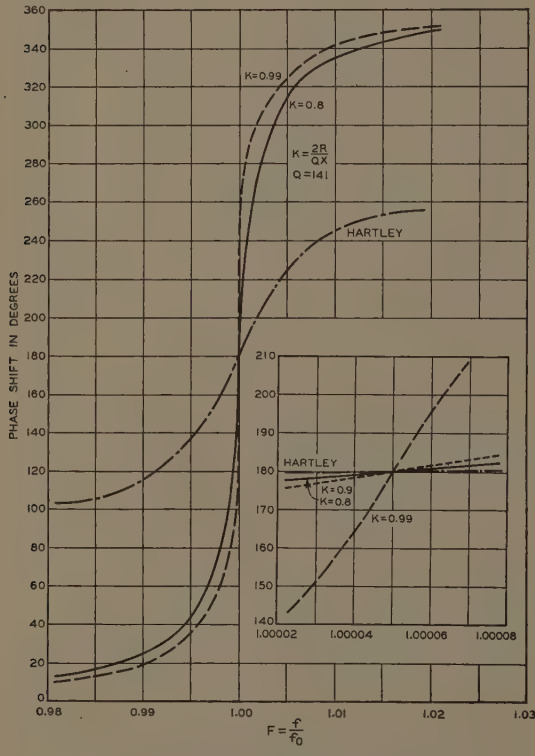

Fig. 5—Phase characteristic of bridged-T oscillator. The phase plot for a Hartley circuit is shown for comparison.

Stability Theory

An analysis for both oscillators has been carried through which is valid for the limiting conditions of very large amplifier gain. In the case of the RC network by a more exact treatment this analysis has been extended to cover the gain achieved experimentally. While the latter theory gave a more complete agreement with the experimental results the expressions obtained are cumbersome. They indicate, moreover, the limiting correctness of the asymptotic expressions which will therefore be given since they are instructive for design purposes. The method of analysis is illustrated in the Appendix. In the analysis it is assumed that the oscillator amplifier is a constant-current generator and all parasitic capacitances are neglected.

It is perhaps well to repeat at this point that we are not considering in this paper the effects of temperature on the circuit elements but are restricting ourselves to the effects of changes in the supply voltages.

Resistance-Capacitance Oscillator

The asymptotic analysis for the RC oscillator shows that

$$\frac{d}{dE}\frac{\delta f}{f_0} = \frac{9}{\sqrt{2}}\frac{\sin\theta}{Rg^2}\frac{dg}{dE} \qquad (8a)$$

where f_0 = the frequency at the null
δf = the operating departure from f_0
θ = the amplifier phase shift
g = the transconductance of the amplifier
E = any supply voltage

Equation (8a) indicates that the frequency stability against supply-voltage shifts should be independent of the frequency of oscillation if R and the amplifier phase shift are fixed and should be infinite if the phase shift of the amplifier is zero.[12] It also predicts that the greater the transconductance of the amplifier the more stable the oscillator becomes.

Experimentally the frequency stability against changes of transconductance varies more rapidly with transconductance than (8a) predicts. There is also a discrepancy in the optimum phase angle. These discrepancies may be ascribed to the failure experimentally to meet the theoretical conditions. These require that the departure of the control resistance under operating conditions from the null value should be small. To fulfill this condition required a considerably higher value of transconductance than that experimentally realized.

A more rigorous analysis of the RC circuit leads to the following equations:

$$\frac{\frac{K^2R^2}{4}\left(1-\frac{1}{F^2}\right)^2+\frac{R^2}{2F^2}\left(\frac{1}{F^2}-K\right)^2}{\left[R\left(\frac{K}{2}+3\right)+R_3(1-K)\right]^2+\frac{R_3^2(K+8)^2}{2}}=\frac{1}{g^2R_3^2}$$

and

$$\tan\theta = -\tan(\phi_1-\phi_2).$$

where

$$\tan\phi_1 = \frac{2(1-KF^2)}{\sqrt{2}\,K(F^2-1)}$$

$$\tan\phi_2 = \frac{-R_3(K+8)}{\sqrt{2}\left[R_3(1-K)-R\left(\frac{K}{2}+3\right)\right]}$$

[12] Zero amplifier phase shift with reference to the required 180 degrees.

$$X = \frac{1}{F} X_0 \qquad R_1 = KR_{10}.$$

X_0, R_{10} are the null values.

These expressions apply for the case of equal capacitances.

A numerical solution of these equations for a given set of circuit parameters leads to a series of curves which are given in Fig. 6. These show the frequency of oscillation referred to the frequency for an exact null for transmission through the network as a function of the transconductance of the amplifier. The amplifier phase shift is taken as parameter. The curves indicate that for small values of transconductance the optimum amplifier phase shift is not zero. They also show that as the transconductance becomes very large the stability tends to become independent of

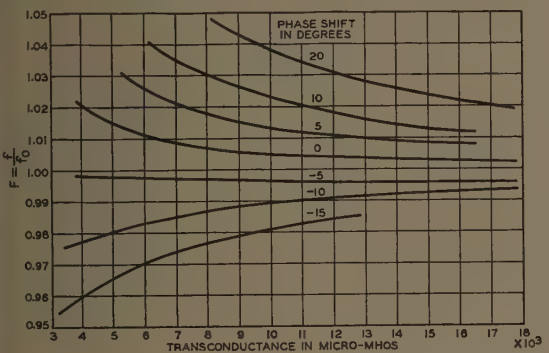

Fig. 6—Theoretical relation of the frequency of oscillation to the frequency of zero transmission as a function of the amplifier phase shift and transconductance. These data were computed for the circuit constants of the experimental model of the *CR* oscillator.

phase shift. Moreover since these curves depend only on the ratio of the shunt and series capacitances, the stability should be independent of frequency when frequency changes are produced with fixed ratio.

It is illuminating to consider the phase-shift-versus-frequency curves of Fig. 7. These curves display on an extended scale a section of the curves of the type previously shown in Fig. 3. The curves are plotted for a series of values of K. The significance of K, as can be seen by inspecting the attenuation curves of Fig. 4, is that the more nearly K approaches unity the larger the gain must be in order that oscillations may be sustained. Thus for any particular frequency at which the amplifier phase shift is fixed, any change in gain will mean a shift from one of these curves to another. From this it can be seen that the optimum operating phase shift will be that which results in the smallest change in frequency for small changes in K about the operating value. If the crossover were common for all values of K then the stability could be made infinite for any gain by incorporating the proper phase shift. Actually the region of crossover is a function of the gain so that the optimum phase shift depends on the operating region. The optimum crossover phase changes very slowly with the gain as indicated by the curves of Fig. 6.

In order to test the foregoing theory, an experi-

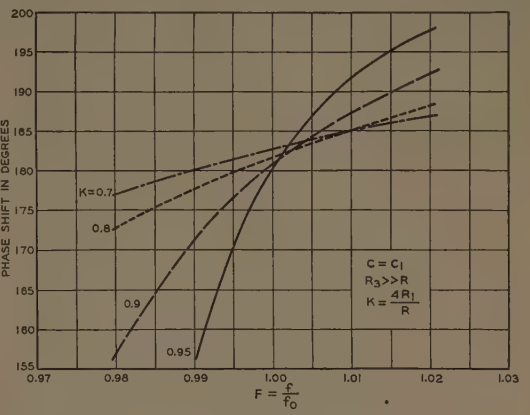

Fig. 7—An expanded section of the phase characteristic for the parallel-T network.

mental oscillator was built according to the schematic of Fig. 1. The control element was composed of 12 Western Electric C-2 switchboard lamps in series. These lamps were found to have the most suitable characteristics of any available control of this type. The frequency was varied by changing the three capacitances simultaneously with the resistances R fixed.

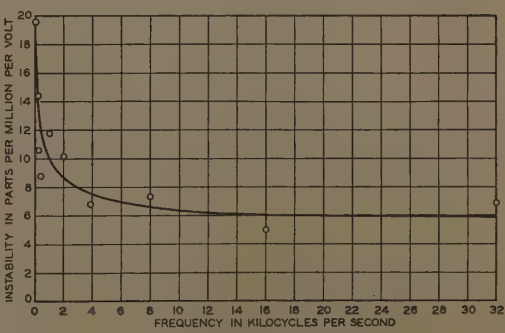

Fig. 8—The variation of the frequency instability of the *CR* oscillator against line-voltage fluctuations as a function of the frequency of oscillation. These measurements are for an oscillator in which frequency changes were produced by simultaneously varying the three tuning condensers and maintaining a constant ratio between them.

The amplitude of oscillation for the model was not absolutely constant with frequency as expected for this type of control but varied about 2 decibels over a frequency range of 50 to 20,000 cycles. Fig. 8 gives the frequency stability as a function of frequency. It will be observed that the stability tends to become independent of frequency as the frequency increases. The deviations from the predicted performance may be ascribed to phase shift in the amplifier. This will become evident in particular for the frequency stability

at low frequencies where the phase shift caused by the plate-supply choke, cathode-bias network, and other elements becomes pronounced.

Several experiments were carried out to test the theory of stability. In one of these the oscillator was operated at an intermediate frequency sufficiently low so that effects from the input capacitances of the tubes

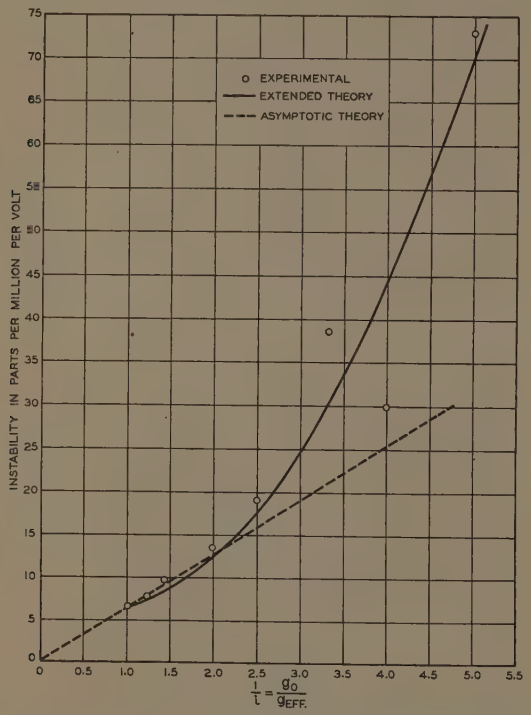

Fig. 9—*CR* oscillator. A comparison of the theoretical and experimental variation of the frequency instability against line-voltage fluctuations as a function of the amplifier transconductance. The curve marked asymptotic theory was fitted to the experimental results for $g_0=g_{eff}$.

could be neglected and high enough so that the low-frequency phase shift was negligible. The effective transconductance of the amplifier was then varied by using a potentiometer grid leak. The frequency change of the oscillator for changes in the supply voltage with reference to the oscillating frequency $f\cong f_0$ will be according to the asymptotic theory,

$$\frac{d}{dE}\frac{(\delta f)}{(f_0)}=\frac{9}{2}\frac{\sin\theta}{X_0 g^2_{eff}}\frac{dg_{eff}}{dE}, \qquad (10)$$

on the assumption that θ is independent of E. For the *CR* oscillator this assumption is justified since any changes in the tube capacitances are negligible in comparison with the circuit capacitances. For this method of varying the transconductance, $g_{eff}=lg_0$ where l is determined by the potentiometer tap. Hence

$$\frac{1}{g^2_{eff}}\frac{dg_{eff}}{dE}=\frac{1}{l^2 g_0^2}\frac{ldg_0}{dE}=\frac{N}{l} \qquad (11)$$

where N is a constant. The expression indicates that the stability should be proportional to $1/l$. Fig. 9 shows the results of this test in which the frequency stability is plotted against $1/l$. For comparison the theoretical result predicted by (11) is indicated by the curved marked asymptotic theory. The experimental and theoretical curves were made to coincide for $l=1$. For large values of the transconductance the experimental results approach a linear variation as (11) predicts but deviate for small values. The data for the curve marked extended theory were calculated from the curves of Fig. 6 which were computed for the circuit constants of the experimental model. For the range of data available from the curves of Fig. 6 the agreement between experimental and theoretical results is good. In this case the data are not fitted, the agreement being numerical. This indicates how well the oscillation amplitude control is removed from the tube since in the theoretical analysis the tube was treated as a linear element.

As a second test, it was desired to investigate the stability for changes in the supply voltage as a function of the amplifier phase shift. Unfortunately no means were readily available which permitted phase shift to be produced without simultaneously changing the gain. The following experiment was carried out which does not constitute an adequate test but for which the results are thought to be significant.

The test was made at such a frequency that the impedance of the plate-supply choke was very high compared to the input impedance of the network so that the phase shift from the choke was negligible. This was also true of phase shifts from other sources such as the cathode bias and the grid by-pass condenser and leak. The amplifier phase shift was assumed to be zero in the normal operating state. Phase shift was then produced by shunting the input of the network with reactance.

Curve *C* of Fig. 10 shows the experimental frequency stability against changes in the supply voltages plotted against the phase shift. Curve *A* gives the theoretical results calculated from the curves of Fig. 6 upon the assumption that the phase shift in the amplifier was produced without changing the gain. Curve *B* was calculated on the same basis as curve *A* but assumed the gain as half the gain for curve *A*. At the frequency of oscillation a capacitive reactance given approximately by (4) appears between the input terminals of the network. Thus a shunting inductance tends to increase the amplifier gain and a capacitance to reduce the gain. This explains the unsymmetrical character of curve *C*. It is also significant that the optimum condition, even for a reduced gain, occurred when a lagging phase shift was produced, agreeing in sign with the theoretical result.

The addition of a shunt capacitance to produce the optimum phase shift offers a convenient and simple method of obtaining high-frequency stability even

with a low-gain amplifier. It is useful chiefly for fixed-frequency oscillators since it would be necessary to vary the shunting capacitance inversely with frequency for a variable oscillator. However, for a variable-frequency oscillator the desirable characteristic of an improving frequency stability as the frequency increases may be obtained by shunting the network with a fixed capacitance which will produce the optimum condition at the maximum frequency.

Inductance-Capacitance Oscillator

In the case of the LC oscillator using a control with a negative thermal characteristic, the asymptotic analysis shows that

$$\frac{d}{dE}\left(\frac{\delta f}{f_0}\right) \cong -\frac{p_0 L \sin\left(\theta + \frac{p_0 L}{2R'}\right)}{4g^2R'^2}\,\frac{dg}{dE} \qquad (9a)$$

where δf and f_0 are defined as for (8)

$X_0 = p_0 L$ = the impedance of each of the coils at the null frequency

$R' = R + (R_1/2)$ where R is the value of the shunt resistance

θ = the amplifier phase shift

g = the amplifier transconductance

The expression obtained from an asymptotic analysis of the LC oscillator in which the amplitude control is a positive temperature-coefficient resistance is

$$\frac{d}{dE}\left(\frac{\delta f}{f_0}\right) \cong -\frac{p_0 L \sin\left(\theta - \frac{p_0 L}{2R_0}\right)}{4g^2R_0^2}\,\frac{dg}{dE}. \qquad (9a')$$

Now R' must always be less than R_0, the value of shunt resistance required to produce a transmission null in the absence of R_T. Hence a sacrifice in stability is entailed in the use of a negative temperature-coefficient thermistor, but this is outweighed by the gains achieved in other directions. The stability expressions are similar in other respects except for the sign of the optimum phase shift.

It is assumed in this that the angle θ is independent of changes in E. For the higher-frequency ranges of this oscillator where the tube capacitances become important this will not be strictly justified and one may expect deviations in performance from the theoretical predictions.

Equation (9a) indicates the optimum stability occurs for a small phase shift $\theta = -(p_0 L/2R')$. For an amplifier for which θ is very small

$$\frac{d}{dE}\left(\frac{\delta f}{f_0}\right) \cong -\frac{p_0^2 L^2}{8g^2R^2}\,\frac{dg}{dE}. \qquad (9b)$$

At first sight (9b) appears to indicate that for any given frequency the stability will be greater the smaller the inductance. However the conditions for oscillation require that R should vary approximately proportionally with L on the assumption of a fixed value of Q_L. Hence the inductance should be chosen as large as possible consistent with other circuit requirements. For an amplitude control in which a negative thermal-coefficient resistance shunts the coil, R is fixed. Thus

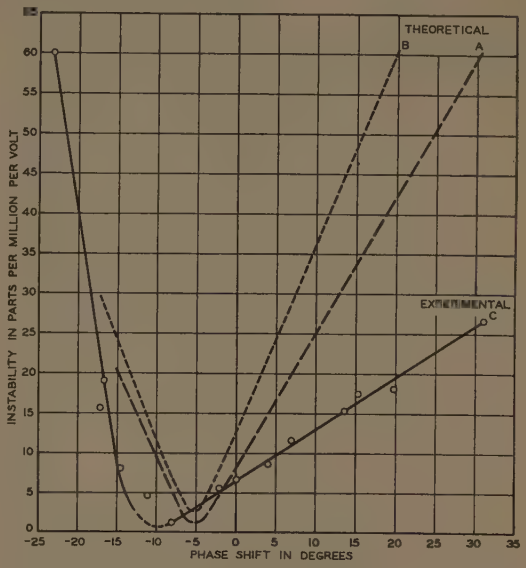

Fig. 10—CR oscillator. Frequency instability against line-voltage fluctuations as a function of the amplifier phase shift.

the frequency stability in this case is inversely proportional to the square of the frequency.

The small phase shift for optimum operation corresponds to the region of crossover for the phase curves similar to that discussed for the CR oscillator. In the case of the LC oscillator the crossover region is much more restricted as is evident from the inset of Fig. 5 and less dependent upon the amplifier gain than for the CR oscillator. This, as would be expected, results in better stability against gain changes. The LC circuit gives results an order of magnitude better than the CR oscillator with the same amplifier gain.

No complete experimental investigation of the stability of the LC oscillator to check the stability theory was made. The arrangement in which a positive temperature-coefficient resistor in the shunt arm serves as a control element is impracticable because of large variations of amplitude which result in covering a reasonable frequency range for any existing thermal elements. Hence all the experimental investigations of the high-frequency oscillator were made with the control provided by a negative temperature-coefficient thermistor shunting the coil as a "Q control." It has been found that the experimental stability curves can be well fitted in form by curves of the type of (9b). This is indicated by the curves of Fig. 11 which apply

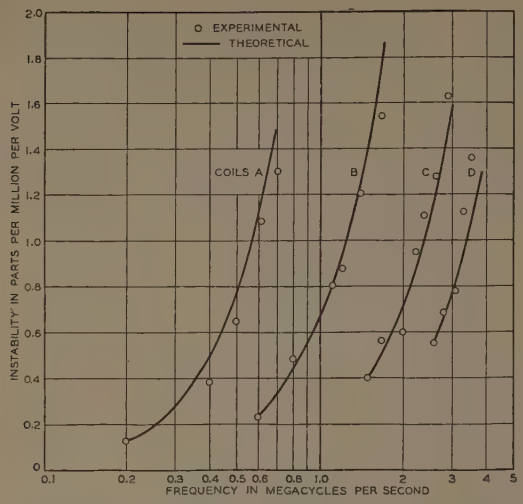

Fig. 11—*LC* oscillator. Frequency instability against line-voltage fluctuations as a function of the frequency of oscillation for an experimental model.

to an experimental model utilizing a negative coefficient thermistor control.

Laboratory Models

General Requirements

Figs. 12 and 13 show the circuit details of the two types of oscillators discussed above.

In each case the oscillator proper is followed by a broad-band feedback amplifier to obtain a stable source of amplification and to prevent reactions between the oscillator and the load circuits. The problem of singing in such a single-stage feedback amplifier is usually not a serious one. In the present case, however, the difficulties are increased by the fact that the coupling network has a high loss at the frequency of desired oscillation and a small loss at other frequencies. If, therefore, a source of spurious phase shift of the order of 180 degrees combined with low coupling loss exists between the grid and plate, oscillation will occur at the frequency of this phase shift rather than at the desired frequency of oscillation. In general, because the frequency of this spurious oscillation is not governed by the control provided, it is undesirable for it

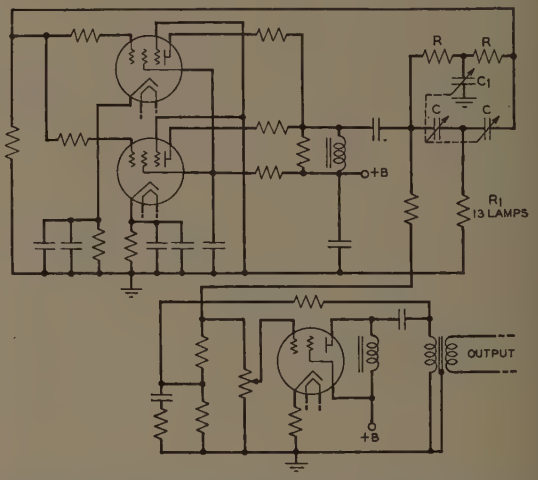

Fig. 12—Circuit diagram for a laboratory model of the *CR* oscillator including an output stage incorporating negative feedback. Frequency changes are accomplished by simultaneous variation of the three condenser arms.

will produce nonlinear behavior in the tubes. An inelegant but very effective cure for this trouble was found in the use of a small resistance (10 to 100 ohms) at the grid and plate-socket prongs of the tube.

Other general design considerations consist chiefly in producing an amplifier section for the oscillator

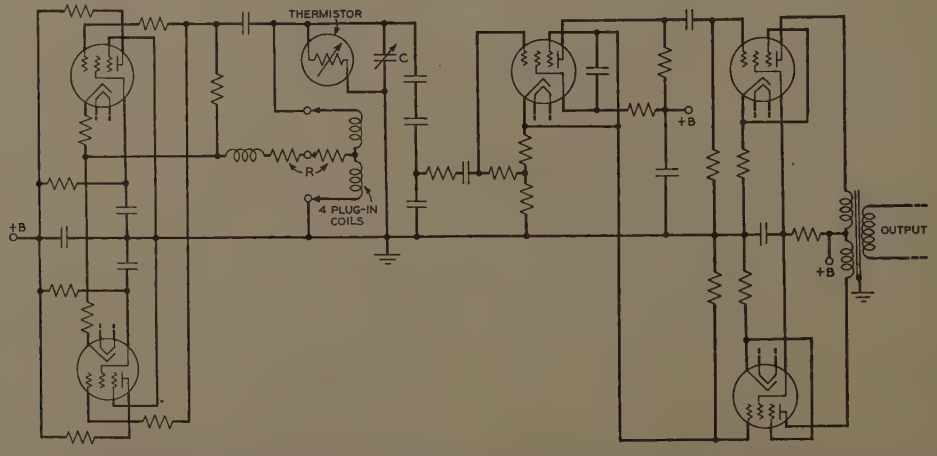

Fig. 13—Circuit diagram for a laboratory model of the *LC* oscillator. The output amplifier consists of an inverter stage and a push-pull stage. The oscillator amplifier in this application was operated with the plates at alternating potential ground in order to reduce the effects of the parasitic capacitances of the tuning elements.

having reasonably flat phase and gain characteristics over the wanted range of the oscillator.

Amplitude-Control Characteristics

The use of the tungsten-filament lamps for a control places some restrictions upon the oscillator circuits. The most suitable lamps commercially obtainable require about 2 milliamperes of current flowing through them in order to operate on a steep portion of their resistance-current characteristic. For a permissible plate swing of the oscillator this limits both the shunt- and series-resistance arms of the network if the condensers are to be equal. An inspection of (8a) shows that this restricts the stability of the oscillator. Physically it means that an upper limit is imposed by the possible amplifier gain. If the shunt and series condensers are not made equal then more amplifier gain may be attained but this requires more capacitance to cover a given frequency range if frequency changes are produced by simultaneous variation of the condensers.

The control resistance, as may be seen, is an important factor for the successful operation of both the *CR* and *LC* oscillator circuits so that it is appropriate to mention some of the characteristics required of it. It is necessary that this resistance should be linear in the sense that it should not vary over a cycle of the oscillation.

A satisfactory solution to the problem of a highly sensitive control is obtained by fixing R_1 at the largest value possible for the range desired and connecting a resistance having a very large negative temperature coefficient between the grid and plate as a separate feedback path. These negative resistance-coefficient thermistors are obtainable in a wide range of impedance and current ratings and have a very high rate of change of resistance with current.[13] Their simplicity and compactness also makes them highly useful for circuit applications. A typical characteristic is shown in Fig. 14.

The method of applying these thermistors may be exemplified by reference to the *LC* oscillator. As an approximation to the impedance facing the amplifier one may take the value $Q_{L_0}p_0L$. One then chooses a value for this as large as is consistent with the requirements of the broad-band amplifier considering stray capacitances, etc. The value of the thermistor for a null is given by (6b) as

$$R_{T_0} = \frac{4R}{1 - \dfrac{2R}{Q_{L_0}p_0L}}.$$

The departure from this value at the operating point is

$$\frac{\delta R_T}{R_{T_0}} = \frac{R_{T_0}}{4gR^2}. \tag{6c}$$

[13] G. L. Pearson, "Thermistors, their characteristics and uses," *Phys. Rev.*, vol. 57, p. 1065; June 1, 1940. Presented, American Physical Society, Washington, D. C., April 10, 1940.

Combining (6b) and (6c) we obtain

$$\frac{\delta R_T}{R_{T_0}} = \frac{1}{gR\left(1 - \dfrac{2R}{Q_{L_0}p_0L}\right)}. \tag{6d}$$

Now, referring to the stability condition (9b), it will be seen that it is desirable to make R as large as possible. However the whole analysis is dependent upon the assumption that $\delta R_T/R_{T_0} \ll 1$ and we therefore choose a value so that this is satisfied. We can make $\delta R_T/R_{T_0}$ small by making the amplifier transconductance large and this is more desirable than manipulating R which cannot in any event be made greater than

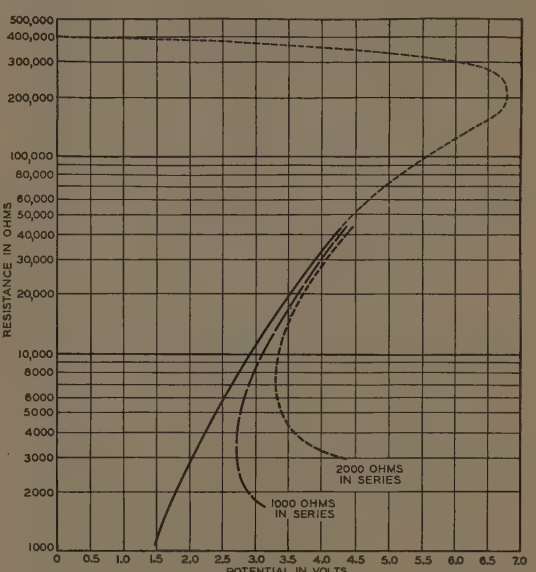

Fig. 14—An example of a resistance-voltage characteristic for a bead thermistor. The effect of adding series resistances on the characteristic is also illustrated.

$Q_{L_0}p_0L/2$. For any given value of g a maximum for (6d) will be obtained for $R = Q_{L_0}p_0L/4$. How much greater than this value R is made will be determined by the transconductance. When R is thus fixed a value of R_{T_0} is determined. The foregoing calculations should be made for the low-frequency end of the band for any given coil since this will be the worst case. A thermistor for which a typical characteristic is shown in Fig. 14 is then selected such that the operating range of resistance required will lie in the region where the resistance changes most rapidly with the voltage in order to minimize variations of amplitude. The resistance characteristic may be further improved by the addition of a fixed resistance in series with R_T. The effect of this is shown in Fig. 14.

The negative temperature-coefficient thermistor may also be applied to the *RC* oscillator. This application makes possible alternative methods of frequency control without the wide variations of amplitude which

would result with these methods if lamps are employed. The negative coefficient thermistors are bridged across the frequency-determining network as in the *LC* oscillator.

There is one undesirable feature involved in a thermal amplitude control which for certain applications may make its use impractical. When sudden variations occur in the supply voltages or any other disturbances which suddenly upset the gain-loss balance of the circuit a fluctuation of the amplitude of the oscillation will occur. This fluctuation is the result of the thermal

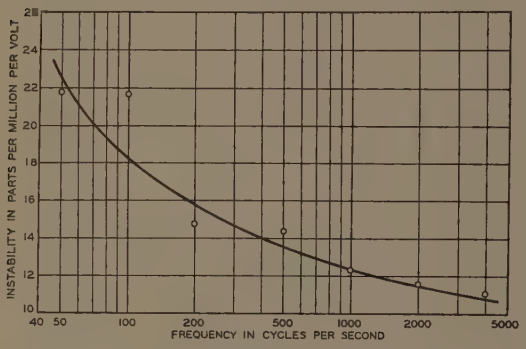
INSTABILITY IN PARTS PER MILLION PER VOLT
FREQUENCY IN CYCLES PER SECOND
40 50 100 200 500 1000 2000 5000
10 12 14 16 18 20 22 24

Fig. 15—Frequency instability against changes in the supply voltage as a function of the oscillating frequency for the laboratory model of the *CR* oscillator illustrated in Fig. 12. Frequency changes are accomplished by gang variation of the condenser arms. The thermal control consisted of tungsten lamps.

lag of the thermistor and it damps out with a decrement determined by the thermal and electrical constants of the thermistor in combination with the constants of the rest of the circuit. The effect is minor for the *LC* circuit but is most severe as might be expected for the *CR* circuit at very low frequencies where the time constants are long. Such fluctuations for many purposes, while annoying, may not be so serious as to militate against the desirable quasi-linear characteristic of a thermal element. In other cases it has been found that a successful substitute for the thermistors may be obtained by using such elements as diodes, copper-oxide varistors, or gas tubes. The suggested elements are all for the case of the negative temperature-coefficient thermistors.

Condenser-Resistance Oscillator

In one low-frequency oscillator, illustrated in Fig. 12, the three condensers in the network were made equal and varied simultaneously to change the frequency. As pointed out previously this means that the positive coefficient thermistor R_1 should have a value independent of frequency and hence may be adjusted to remain at the steepest point of its current-resistance characteristic resulting in good amplitude control. The amplitude variation of the oscillator proper was found to be less than ± 0.5 decibel over a frequency range of 40 cycles to 50 kilocycles with most of this variation caused by phase shift at the extremes of frequency.

Fig. 15 illustrates frequency stability as a function of frequency. Decreasing stability at low frequencies resulted from phase shift introduced by the plate-supply choke.

The harmonic content of the oscillator proper was found to be principally second harmonic and was about 50 decibels below the fundamental over the entire frequency range. The output feedback amplifier when supplied from a pure sinusoidal source had a harmonic content 60 decibels below the fundamental at full power output of 20 decibels above 1 milliwatt. A switch is provided to remove the feedback for use where harmonic content is of lesser importance, in which case an output of over 1 watt is available.

Another type of low-frequency oscillator made practicable by the use of a negative coefficient thermistor is one in which the frequency is varied by changing the resistance arms simultaneously. It has been pointed out that under these circumstances the network input impedance and hence the amplifier gain will change. However, the wide range of resistance change for a small change of voltage across the negative coefficient thermistor makes it possible to cover a 10-to-1 frequency range without undue amplitude variation.

Fig. 16 illustrates a model of this type where three resistances are ganged together and are continuously variable over a 10-to-1 range. The position of the range is changed by varying the condensers together in

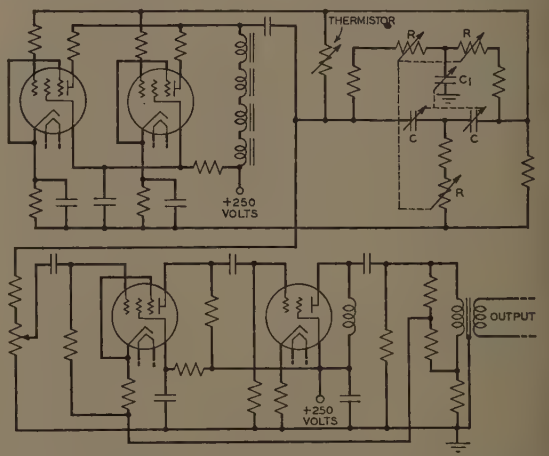

Fig. 16—Circuit diagram for a laboratory model of a *CR* oscillator with a two-stage output amplifier. Frequency variation in this case is accomplished by a continuous variation of the three resistance arms over a limited range. Four separate ranges are covered by switching the three condenser arms. The resistance arms permit a 10-to-1 frequency range and the over-all range of the oscillator is from 14 to 50,000 cycles.

decade steps. Here a range of 12 to 50,000 cycles was obtained in four steps. The negative coefficient amplitude control made it possible to increase the gain and hence reduce the harmonic content of the oscillator circuit to a value of 60 decibels below the fundamental at the high-frequency end of each range, and about 80 decibels at the low-frequency end.

Inductance-Capacitance Oscillator

In the high-frequency bridged-T oscillator, shown in Fig. 13, continuous frequency control over a restricted range is obtained by varying the capacitance. A range control using four coils covered in steps the frequency range from 12 kilocycles to 6 megacycles.

In the laboratory models of the LC circuit the large parasitic capacitances associated with a wide-range variable condenser make it preferable to place the plate end of the condenser array at ground with the tube cathode off ground. It will be observed that under these conditions the tube acts as a triode since the suppressor and screen grids are at the same alternating potential as the plate.

Reference to the stability criterion (9b) shows that for greatest stability the L/C ratio and Q_L should be kept as large as possible. The desirability of the large L/C ratio, which is contrary to conventional oscillator practice, arises from the fact that the impedance of the network and hence the gain and permissible feedback increase with L. In practice, where the frequency of operation was such that the plate-cathode and grid-cathode capacitance limited the gain, a low L/C ratio was found to be preferable in order to minimize phase shifts.

Figs. 17 and 18 show the amplitude- and plate-voltage-stability characteristics of this oscillator. It will be noted that the stability curve for the highest frequency coil shows a point of very high stability at about 4.6 megacycles. This result was accomplished by correcting the phase shift of the amplifier-network characteristic to an optimum value by inserting a 10-microhenry coil in series with R_1. This coil tends to compensate for the phase shift introduced by the upper cutoff of the amplifier caused by parasitic capacitances.

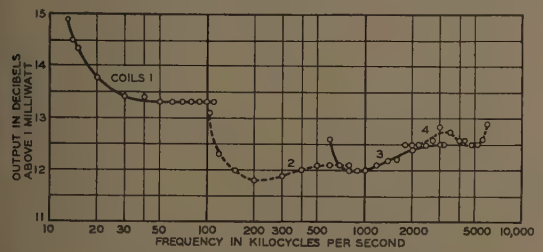

Fig. 17—Amplitude-versus-frequency characteristics of the LC laboratory oscillator illustrated in Fig. 13.

The mean value of the amplitude characteristics of the four coils could have been adjusted to equality by an adjustment of R_1. A more uniform response can be obtained by using five or six coils instead of four. The harmonic content of this oscillator and its associated feedback amplifier is about 60 decibels below the fundamental for power outputs up to 13 decibels above 1 milliwatt.

Multistage amplifiers may be used for the oscillator proper when very high stabilities are needed. The difficulties of high-gain, high-feedback amplifier design and construction however discourage any great excursion in this direction. An oscillator employing a two-stage amplifier was built for the same frequency range as the one discussed above and showed a stability improvement of two to three times. The harmonic content was correspondingly improved.

It may be well to repeat that the oscillators as built were for variable-frequency work. The electrical and

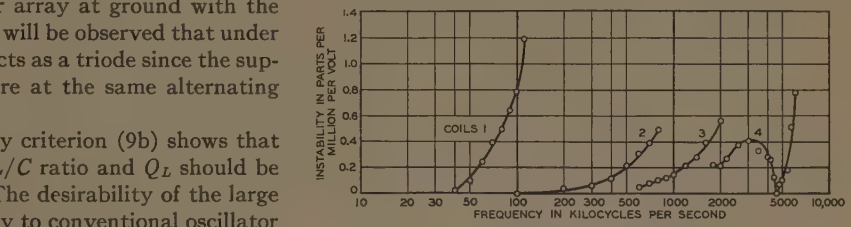

Fig. 18—Frequency instability against changes in the supply voltage as a function of the oscillating frequency of the LC laboratory oscillator of Fig. 13.

mechanical considerations necessary to obtain the wide frequency range make some sacrifice in stability necessary. Fixed-frequency or narrow-band oscillators of the same basic design would show still better stabilities since the lead inductance of the capacitance and the amplifier phase shift could be reduced or corrected.

ACKNOWLEDGMENT

The authors wish to express their indebtedness to Dr. Eugene Peterson of these laboratories under whose guidance this work was carried on. In particular we are indebted to him for the basic method of the asymptotic analysis. We also wish to express our appreciation to Mr. G. L. Pearson for his co-operation in supplying the negative temperature-coefficient thermistors and to Dr. H. W. Bode for many helpful discussions on the theory of the feedback amplifier.

APPENDIX

It is assumed that the amplifier is a constant-current generator. Then the mesh equations for the circuit of Fig. 4 may be written

$$(R_1 + jX_L) = [2R_1 + j(2X_L - X_C)]\frac{i_2}{i_1} - (R_1 + jX_L)\frac{i_3}{i_1} + jX_C\frac{i_4}{i_1}$$

$$0 = jX_C\frac{i_2}{i_1} + 0 + (R_T - jX_C)\frac{i_4}{i_1} \qquad (1)$$

$$R = -(R_1 + jX_L)\frac{i_2}{i_1} + (R + R_3 + R_1 + jX_L)\frac{i_3}{i_1} + 0.$$

These may be solved to give

$$\frac{\Delta i_3}{i_1} = R_1R_T(R_1+2R) + X_LX_C(2R_1+2R) - R_TX_L^2 + j[R_TX_L(2R_1+2R) - R_1X_C(R_1+2R) - R_TRX_C + X_L^2X_C]. \quad (2)$$

Let

$$R_1+2R = 2R', \qquad Q_C = pCR_T, \qquad Q_L = \frac{pL}{R_1}$$

$$Q' = \frac{Q_CQ_L}{Q_C+Q_L}.$$

$R_1X_LX_C$ is neglected in comparison with $R_TX_L^2$ and $2R_1R'X_C$ in comparison with R_TRX_C. Then the conditions for $\Delta i_4/i_1=0$ are

$$R \leqq R' = \frac{Q_0'X_{L_0}}{2}, \qquad f_0^2 = \frac{1}{8\Pi^2LC}\,\frac{1-\dfrac{1}{Q_0'Q_{L_0}}}{1+\dfrac{1}{Q_0'^2}}. \quad (3)$$

At the operating point

$$p = p_0+\delta p, \qquad Q' = Q_0'+\delta Q.$$

Then upon utilizing the null conditions, (2) may be written, if products of small quantities are neglected, as

$$\frac{\Delta i_3}{i_1} = \delta Q'\frac{2p_0R'R_TL}{Q_0'^3}[-Q_0'-j] + \delta p\left[-\frac{2R'R_TL}{Q_0'} + j\left(\frac{4R'R_TL}{Q_0'^2} + 2R_TR'L + \frac{2R_TRL\left[1+\dfrac{1}{Q_0'^2}\right]}{1-\dfrac{1}{Q_0'Q_{L_0}}}\right)\right]. \quad (4)$$

Equation (6) is of the form

$$\delta Q'[\alpha_1+j\alpha_2] + \delta p[\beta_1+j\beta_2]. \quad (5)$$

Equation (1), when solved for Δ at the null condition denoted by Δ_0, yields, if R and R_1 are neglected in comparison with R_3, and R_1 in comparison with R_T and if we assume $X_{C_0} \cong 2X_{L_0}$,

$$\Delta_0 = 2R_3R_1R_T\left[1+\frac{Q_{L_0}}{Q_{C_0}}+\frac{Q_{L_0}X_{L_0}}{2R_3}\right] + jR_TR_3\left[2X_{L_0}-X_{C_0}\left(1-\frac{X_{L_0}^2}{R_TR_3}\right)\right] \leqq \frac{4R_3R_TR'}{Q_0'^2}. \quad (6)$$

An inspection of the equation for Δ shows that Δ changes slowly near the null and hence we are justified in assuming $\Delta \cong \Delta_0$ at the operating point.

Further conditions for oscillation are

$$i_3R_3 = V, \qquad i_1 = gV$$

where g may be complex. Combining,

$$\frac{gR_3}{|\Delta|}\left|\frac{\Delta i_3}{i_1}\right| = 1 \quad \text{and} \quad \theta + \tan^{-1}\left|\frac{\Delta i_3}{i_1}\right| = 0, \quad (7)$$

where θ is the phase shift produced by the amplifier. In order to write (7) as above it is necessary that Δ shall be real which to a very good approximation will be true near the null. From (7) one may derive the two equations

$$\delta Q' = -\delta p\,\frac{\beta_2+\beta_1\tan\theta}{\alpha_2+\alpha_1\tan\theta} \quad (8a)$$

$$\delta p = \frac{\Delta_0\cos\theta(\alpha_2+\alpha_1\tan\theta)}{gR_3(\alpha_1\beta_1-\alpha_1\beta_1)}. \quad (8b)$$

When the values of α_1, α_2, β_1, β_2, and Δ_0 are inserted

$$\frac{\delta p}{p_0} = -\frac{2\sin\left(\theta+\tan^{-1}\dfrac{1}{Q_0'}\right)}{gp_0LQ_0'^2\left[1-\dfrac{1}{Q_0'^2}+\dfrac{R}{R'}\,\dfrac{1+\dfrac{1}{Q_0'^2}}{1-\dfrac{1}{Q_0'Q_{L_0}}}\right]}. \quad (9)$$

Now

$$\frac{R}{R'} \leqq 1, \quad \frac{1}{Q_0'^2} \ll 1, \quad \text{and} \quad \frac{1}{Q_0'Q_{L_0}} \ll 1.$$

Hence

$$\frac{\delta p}{p_0} \leqq -\frac{p_0L\sin\left(\theta+\tan^{-1}\dfrac{1}{Q_0'}\right)}{4gR'^2} \quad (10)$$

which is the equation given in the text since $1/Q_0'$ is small.

Equation (10) may be combined with (8a) to determine δR_T.

A Note on Field Strength of Delhi 3 and Delhi 4 at Calcutta During the Solar Eclipse of September 21, 1941*

S. P. CHAKRAVARTI†, MEMBER I.R.E.

Summary—**The signal field strengths of two Delhi, India, stations on frequencies of approximately 15.3 and 11.8 megacycles were measured during a morning solar eclipse in Calcutta 900 miles away. Changes related to the eclipse were found.**

FIELD strengths of Delhi 3 (5 kilowatts aerial power and 19.62 meters day wavelength) and Delhi 4 (5 kilowatts aerial power and 25.26 meters wavelength) were simultaneously measured at Calcutta situated at about 900 miles to the southeast of Delhi during the hours of the solar eclipse (i.e., between 8:15 A.M. and 10:30 A.M., Calcutta time) on Sunday, September 21, 1941. The receiving point was located in Camac Street, Calcutta, and the field-strength-measuring equipments consisted of Mullard-Philips superheterodyne receivers with the automatic volume control removed and other necessary accessories fitted up for the purpose, connected to horizontal aerials cut for the wavelengths.

The relative values of the horizontally (abnormally) polarized component of the electric-field intensity were ordinarily observed every minute and at certain times every 5 or 10 seconds. Fig. 1 shows the observations on Delhi 3 between 8:54 A.M. and 10:30 A.M., Calcutta time, the ordinates representing quantities proportional to the strength of the horizontal component of of the electric vector. Similarly, Fig. 2 shows the observation on Dehli 4 between 8:34 A.M. and 10:30 A.M., Calcutta time. The variation in modulation percentage in these channels during the period of observation as read from an indicator was inappreciable, and the same program was transmitted through both the channels during the period.

It will be seen from Figs. 1 and 2 that over the greater portion of the period under observation the average signal intensity is higher than the average noneclipse intensity (over the same period) and that towards the end of the period it falls almost to the noneclipse intensity level.

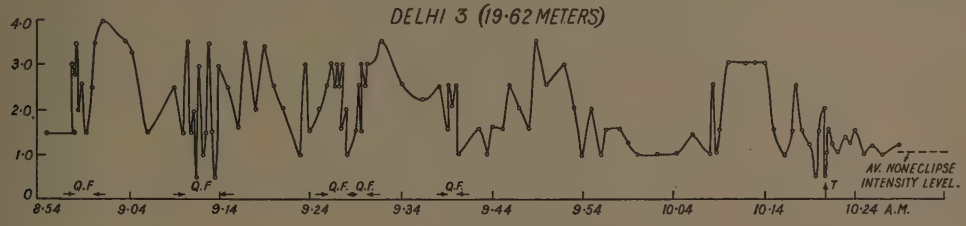

Fig. 1

Fading of Delhi 3 (19.62 Meters)

It will be seen from Fig. 1 that during the first half of the period of observation (i.e., roughly the first 45 minutes) there are several indications of "quick fading" having a period of 10 to 30 seconds and of an amplitude such that in some cases the signal intensity ranged from about one-half or full (average) noneclipse value to over twice or thrice that value, and in others it ranged from 2½ to 3 times the value or from 3 to 3½ times the value. "Q.F.'s" on the figures indicate the occasions of quick-fading. Fig. 3 shows a typical

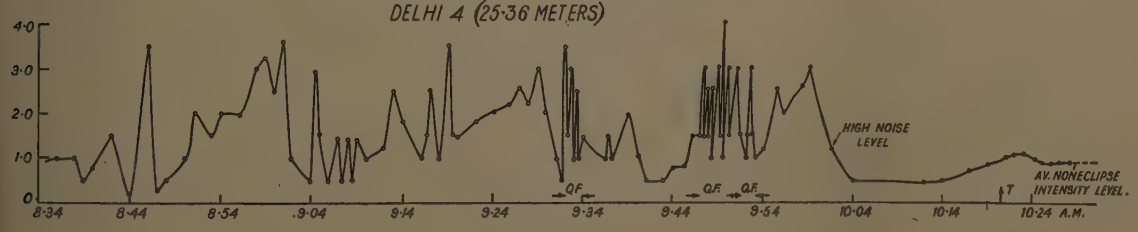

Fig. 2

* Decimal classification: R270×R113.55. Original manuscript received by the Institute, March 23, 1942.

† Kanodia Electrical Communication Engineering Laboratories, Department of Applied Physics, University of Calcutta, Calcutta, India.

curve of quick fading drawn on an enlarged time scale. The second half of the period of observation until a few minutes before the termination of eclipse is characterized by "slow fading" having a period of 1 to 3 minutes and of an amplitude such that the signal intensity ranged from about full noneclipse value to two or three times that value.



Fig. 3—Quick fading.



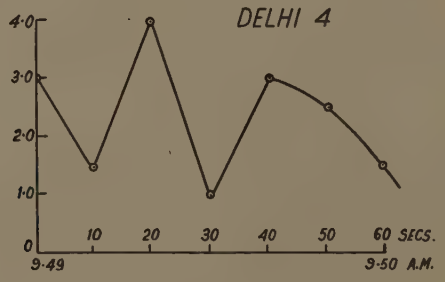

Fig. 4—Quick fading.

Fading of Delhi 4 (25.36 Meters)

It will be seen from Fig. 2 that for the case of the longer wave the first half of the period of observation is characterized by slow fading having a period of 1 to 5 minutes and of an amplitude such that the signal intensity ranged from one fifth or one half of the average noneclipse value to three and a half times that value. During 25 minutes of the second half of the observation period, there are a few indications of quick fading having a period of 5 to 30 seconds and of an amplitude such that the signal intensity varied from full or one and a half times the average noneclipse value to three and a half or four times that value. Fig. 4 shows the typical curves (showing quick fading) drawn on an enlarged time scale. A rough periodicity related to the maximum values of signal intensity can also be noticed from Fig. 2. The highest values of signal intensity can be seen to be reached after a period varying from 13 to 18 minutes.

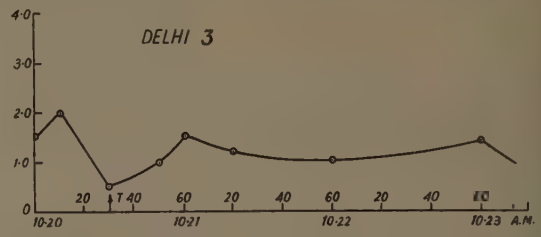

Fig. 5—Termination of the eclipse.

Conditions near Termination of the Eclipse

T on the time scale in Figs. 1 and 2 represents roughly the termination of the eclipse. Fig. 5 shows the termination conditions for Delhi 3 on an enlarged time scale. It will be seen, therefrom, that near about or at the termination time there is a considerable reduction in the strength of the signal followed by a quick or slow rise in strength one or more times in course of next 2 to 3 minutes.

Open-Wire Radio-Frequency Transmission Lines*

EDMUND A. LAPORT†, MEMBER I.R.E.

Summary—**Design formulas for several types of open-wire transmission lines, both balanced and unbalanced, are developed and listed in a simplified form suitable for most engineering applications. The method of logarithmic potentials is used. Its utility in connection with certain aspects of low-frequency antenna design is briefly outlined.**

Introduction

SINGLE-PHASE open-wire radio-frequency transmission lines have been widely used in engineering practice, yet there seems to be no comprehensive compilation of design formulas available. The present paper is a collection of a few which are of frequent practical utility. The method by which design formulas are developed is outlined briefly in the various type cases, from which one can readily proceed to other cases of a special nature.

Both balanced and unbalanced lines are discussed, together with the extension of line formulas to certain important aspects of low-frequency antenna design. These formulas are not exact but they are accurate enough for most engineering applications, where it is simply desired to transfer from one point to another. The conditions under which the equations are developed are stated, and departure from these basic conditions will modify the formulas in various degrees and determine the practicality of any given design for any particular application.

Characteristic impedance and transmission efficiency are the first values one wishes to know for any particular line. Otherwise, one knows these values and wishes to find the line configuration which will provide them. The characteristic impedance can be calculated with great accuracy under ordinary circumstances, but the transmission efficiency is very difficult to predict precisely under the many empirical conditions encountered in reality. It is, therefore, more convenient to consider attenuation in relative or comparative terms from some known standard. For instance, in the case of an unbalanced line (where one or more wires of the system are at ground potential and the others connected in parallel as the other side of the circuit) the controlling factor in the attenuation is the proportion of the total return current which is conducted in the earth. In all such cases, some current is conducted in the earth since the ground-wire current never equals that in the high-potential wires. This is because not all of the lines of force originating on the high-potential wires terminate on the grounded wires but some are completed to earth. The amount of flux reaching earth is dependent upon the line configuration in cross section. The relative figure of merit of an unbalanced line design can, therefore, be indicated by the ratio of total ground-wire current to the total high-potential wire current. The larger this ratio, the lower the attenuation, other things remaining equal. This current ratio is the same as the charge ratio and is a convenient factor to use because it can be readily found by solving the fundamental potential-charge equations from which the other line characteristics are derived.

The qualitative fact that there are some lines of force completed to earth has been an objection which has impeded the more general adoption of open-wire lines. The matter must, of course, be decided on quantitative considerations. The attenuation and radiation characteristics of a line are within the control of the designer and he can go as far as he wishes in minimizing both. The many years of successful world-wide experience with open-wire lines for communication and power-transmission purposes, the system reliability, straightforward construction, and relatively low construction cost and maintenance, are features of importance to the radio engineer.

Simple principles of electrostatics provide the tools for predicting the characteristic impedance, the charge ratios, the capacitance and inductance per unit length, and the field of force in space, from the cross-sectional geometry of the line. The theory of logarithmic potentials for cylindrical parallel conductors is used to derive the line equations in terms of potentials, charges per unit length, conductor sizes, and spacings. Experience has proved these principles to be valid for radio frequencies when the cross-sectional dimensions, including image distances, are so small with respect to the wavelength that retarded potentials are not involved. On the other hand, the frequency must be high enough and the losses low enough to justify the familiar approximation that $Z_0=(L/C)^{1/2}$ or, more conveniently, $Z_0=1/vC$. Practical open-wire-line construction dictates conductor spacings large with respect to the wire diameter so that proximity effect is negligible. In addition to the above, the formulas herein are based on the assumptions that the wires have the same size, that they run parallel to each other and at uniform height over a perfectly conducting plane ground, and that the differences in heights of the individual wires are negligible in proportion to the total height. The line is considered to be uniform in all respects throughout its length and in the structural design it is quite necessary to attempt to realize this. These restrictions can be readily removed at the expense of greatly increased labor of formulation and computation, when circumstances justify.

There are many desirable line configurations but

* Decimal classification: R116. Original manuscript received by the Institute, September 30, 1942.

† RCA Victor Company, Ltd., Montreal, Quebec, Canada.

ordinarily economy and operating reliability dictate constructions using a small number of wires or the least copper in an arrangement using a minimum of poles, insulators, pole hardware, and installation labor. Where large amounts of power are to be transmitted, line potentials are reduced by reducing Z_0. Gradients are reduced by increasing wire sizes or using 2 or more small wires in parallel. In the case of unbalanced lines, the ground-wire to high-potential-wire charge ratio k diminishes as the number of wires is reduced; for minimum attenuation we wish to keep k as large as possible, especially on long lines and at the higher frequencies. k increases as the wire configuration is made more compact, but to avoid swinging wires, excessive tension, or excessive sag, the pole span can be reduced with consequent increase in the number of poles and attachments. Optimum electromechanical design must compromise all these factors to the point where the law of diminishing returns acts. Practical construction usually requires a minimum clearance height of 10 feet and prevailing wind and ice loadings and temperature variations dictate minimum wire sizes and maximum spans. With these factors at work it is very helpful to have simple formulas at hand to reveal quickly the essential characteristics with minimum expenditure of engineering time.

Occasionally one desires to know the field configuration in space around the line, the potential at some point in space due to the line, or the potential gradient at some point. Equations are included for several cases which enable the space potentials to be determined. Solving these for many points, the equipotential contours can be mapped in as great detail as may be desired.

In a recent paper,[1] Brown explained an unusually direct method by which the line equations are developed. The present paper follows this method. He also studies in detail the matters of attenuation and radiation, and gives data on three types of unbalanced open-wire lines, the results of which are included here because they apply to lines which are relatively common in practice. His equations for attenuation for unbalanced lines are repeated here for reference as they are of great utility in relation to the contents of this paper.

Attenuation Due to Losses in the Earth from Earth Return Currents

$$\alpha_e = \frac{13,720}{Z_0 h_{FT}} (1 - k)^2 \sqrt{\frac{10^{-13} f_{mc}}{\sigma_{emu}}} \text{ (decibels per 1000 feet)}$$

Attenuation Due to Copper Losses in the Line

$$\alpha_c = \frac{2.17\sqrt{f_{mc}}}{\rho_{in} Z_0} \left[\frac{1}{m} + \frac{k^2}{n}\right] \text{ (decibels per 1000 feet)}$$

[1] G. H. Brown, "Characteristics of unbalanced overhead transmission lines," *Broadcast News*, May, 1941.

(This is for a symmetrical line configuration where m is the number of high-potential wires and n the number of grounded wires.)

Symbols Used in this Paper

Q = root-mean-square charge in coulombs per centimeter
$\lg = \log_{10}$
$\ln = \log_e$
k = ratio of total ground-wire currents (or charges) to total high-potential wire currents (or charges)
Z_0 = characteristic impedance in ohms
C = capacitance in farads per centimeter
v = velocity of propagation of charges in the wires of 3×10^{10} centimeters per second for uniform linear overhead conductors
ρ = radius of wire
a, b, c, etc. = center spacings between various wires
h = mean height of wires above ground plane
r_1, r_2, r_3, etc. = distances from various conductors to a point in space
r_{11}, r_{22}, r_{33}, etc. = conjugate distances from the images of the conductors to the point in space

All dimensions are in the same units.

α = attenuation in decibels per thousand feet of line.

Indicated equalities (=) *should be read "very nearly equal to."*

CASE I

Single-Wire Line with Ground Return[2]

The potential of the wire in terms of its charge per centimeter of length is written, after conversion to practical units and common logarithms,

$$E_1 = 138v\left(Q_1 \lg \frac{1}{\rho} - Q_1 \lg \frac{1}{2h}\right) \text{ (volts)}.$$

The potential coefficients $\lg(1/\rho)$ and $\lg(1/2h)$ are due to the wire and its image respectively. The reciprocal dimensions are used for mathematical convenience so that each term can have the same sign as that of its charge. This condenses to $E_1 = 138vQ_1\lg(2h/\rho)$.

The capacitance C per unit length is the charge per unit length divided by the difference of potential so that,

$$C = \frac{Q_1}{E_1} = \frac{1}{138v \lg \frac{2h}{\rho}}$$

and

$$Z_0 = \frac{1}{vC} = 138 \lg \frac{2h}{\rho}.$$

[2] C. A. Boddie, "Telephone communication over power lines by high frequency currents," PROC. I.R.E., vol. 15, pp. 578–590; July, 1927.

The potential at a near-by point in space above the ground is

$$E_p = 138v\left[Q_1 \lg \frac{1}{r_1} - Q_1 \lg \frac{1}{r_{11}}\right] \equiv 138vQ_1 \lg \frac{r_{11}}{r_1}$$

so that

$$\frac{E_p}{E_1} = \frac{\lg \frac{r_{11}}{r_1}}{\lg \frac{2h}{\rho}}.$$

Case II

Two Elevated Wires, One Grounded

The potential equation for wire No. 1 is written

$$E_1 = 138v\left[Q_1 \lg \frac{1}{\rho} - Q_1 \lg \frac{1}{2h} + Q_2 \lg \frac{1}{a} - Q_2 \lg \frac{1}{2h}\right].$$

The first term is the potential on the wire due to its own charge, the second the induced potential due to

Fig. 1—Diagram for Case I.

Fig. 2—Diagram for Case II.

its own image, the third the potential induced by the charges on wire No. 2 and the fourth the potential induced by the image of No. 2.

Similarly, for wire No. 2, which is grounded,

$$E_2 = 138v\left[Q_1 \lg \frac{1}{a} - Q_1 \lg \frac{1}{2h} + Q_2 \lg \frac{1}{\rho} - Q_2 \lg \frac{1}{2h}\right] = 0.$$

From the latter the ratio of the charges can be found to be

$$k = \frac{Q_2}{Q_1} = -\frac{\lg \frac{2h}{a}}{\lg \frac{2h}{\rho}}.$$

(Note that k is a negative fraction.) The equation for E_1 is then condensed to

$$E_1 = 138vQ_1\left[\lg \frac{2h}{\rho} + k \lg \frac{2h}{a}\right].$$

To obtain the reciprocal of the capacitance per unit length this is divided through by Q_1 which gives

$$\frac{1}{C} = \frac{E_1}{Q_1} = 138v\left[\lg \frac{2h}{\rho} + k \lg \frac{2h}{a}\right]$$

and

$$Z_0 = 138\left[\lg \frac{2h}{\rho} + k \lg \frac{2h}{a}\right].$$

The potential at a near-by point in space with respect to that of the wire is written

$$E_p = 138v\left[Q_1 \lg \frac{1}{r_1} - Q_1 \lg \frac{1}{r_{11}} + Q_2 \lg \frac{1}{r_2} - Q_2 \lg \frac{1}{r_{22}}\right]$$

and condensed to

$$E_p = 138vQ_1\left[\lg \frac{r_{11}}{r_1} + k \lg \frac{r_{22}}{r_2}\right].$$

The ratio of this potential to that on the wire is

$$\frac{E_p}{E_1} = \frac{\lg \frac{r_{11}}{r_1} + k \lg \frac{r_{22}}{r_2}}{\lg \frac{2h}{\rho} + k \lg \frac{2h}{a}}.$$

Case III

Three Wires in Elevated Horizontal Plane, Equispaced, with Two Outer Wires Grounded

From obvious electric symmetry, $Q_1 = Q_3$ so that the



Fig. 3—Diagram for Case III.



Fig. 4—Diagram for Case IV.

potential equations can be written in simplified form immediately

$$E_1 = 138v\left[Q_1 \lg \frac{2h^2}{a\rho} + Q_2 \lg \frac{2h}{a}\right] = 0$$

$$E_2 = 138v\left[Q_1 \lg \frac{4h^2}{a^2} + Q_2 \lg \frac{2h}{\rho}\right].$$

Since wires No. 1 and No. 3 are both at the same potential, the equation for No. 3 will lead to an identity with that for No. 1 so need not be written. The charge ratio is solved out of the first equation

$$\frac{Q_1}{Q_2} = \frac{\lg \frac{2h}{a}}{\lg \frac{2h^2}{a\rho}}.$$

Taking into consideration that there are two grounded wires

$$k = \frac{Q_1 + Q_3}{Q_2} = -2\frac{\lg \frac{2h}{a}}{\lg \frac{2h^2}{a\rho}}.$$

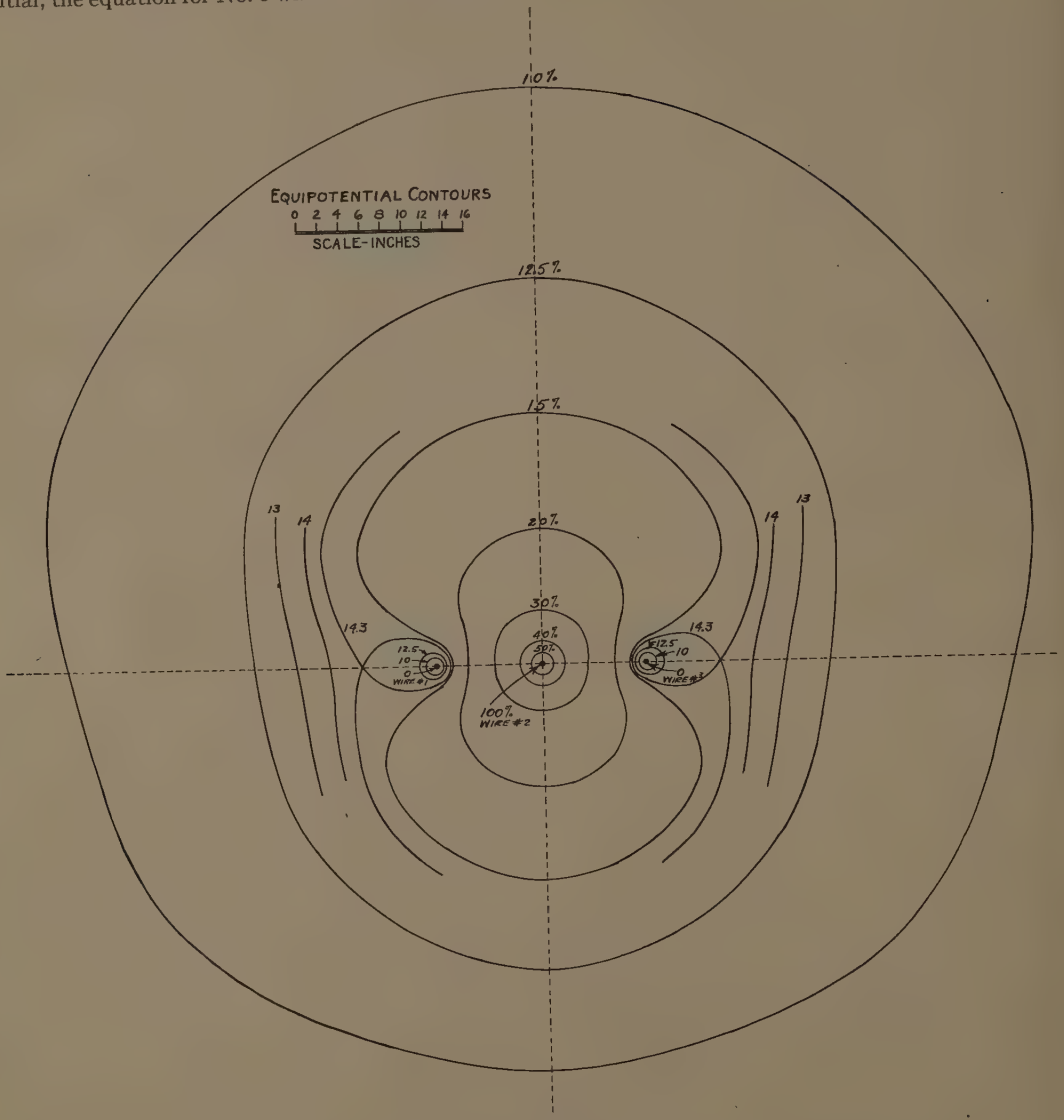

Fig. 3(a)—Field plot for Case III.

Rewriting, substituting, and condensing

$$E_2 = 138vQ_2\left[k \lg \frac{2h}{a} + \lg \frac{2h}{\rho}\right]$$

from which the reciprocal capacitance is found to b

$$\frac{1}{C} = \frac{E_2}{Q_2} = 138v\left[k \lg \frac{2h}{a} + \lg \frac{2h}{\rho}\right]$$

and

$$Z_0 = 138\left[k \lg \frac{2h}{a} + \lg \frac{2h}{\rho}\right].$$

In the same manner as for Case II, the ratio of the potential at a near-by point in space with respect to that on the wire No. 2 is

$$\frac{E_p}{E_2} = \frac{\frac{k}{2}\lg \frac{r_{11}r_{33}}{r_1 r_3} + \lg \frac{r_{22}}{r_2}}{k \lg \frac{2h}{a} + \lg \frac{2h}{\rho}}.$$

Fig. 3(a) is a map of the equipotential contours in the vicinity of the wires for a transmission line of this type, where the height above ground is 120 inches, the wire spacing 10 inches, and the wire radius 0.064 inch. The map was plotted from this equation.

Some sample characteristic values for transmission lines of this type are shown in Table I.

TABLE I

h height inches	ρ radius inches	a spacing inches	k charge ratio	Z_0 impedance ohms
120	0.064	5	−0.678	336
120	0.064	10	−0.592	380
120	0.064	15	−0.537	413

Case IV

Four Wires in Elevated Horizontal Plane, Equispaced, with Two Outer Wires Grounded and Two Inner Wires Connected in Parallel

Electrical symmetry indicates that $Q_1 = Q_4$ and $Q_2 = Q_3$.

Writing the potential equations and solving for the charge ratio yields

$$k = \frac{Q_1}{Q_2} = -\frac{\lg \frac{2h^2}{a^2}}{\lg \frac{4h^2}{3a\rho}}.$$

From the equation for E_2, taking into account that there are two wires charged to potential E_2, the reciprocal capacitance is found to be

$$\frac{1}{C} = \frac{E_2}{2Q_2} = 69v\left[k \lg \frac{2h^2}{a^2} + \lg \frac{4h^2}{a\rho}\right]$$

and

$$Z_0 = 69\left[k \lg \frac{2h^2}{a^2} + \lg \frac{4h^2}{a\rho}\right].$$

The potential at a near-by point in space relative ot that of the high-potential wires is

$$\frac{E_p}{E_2} = \frac{k \lg \frac{r_{11}r_{44}}{r_1 r_4} + \lg \frac{r_{22}r_{33}}{r_2 r_3}}{k \lg \frac{2h^2}{a^2} + \lg \frac{4h^2}{a\rho}}.$$

Sample values are shown in Table II.

TABLE II

h	ρ	a	k	Z_0
144	0.064	5	−0.652	232
144	0.064	10	−0.561	252

Case V

Five Wires in Elevated Horizontal Plane, Equispaced, with Two Outer and the Middle Wire Grounded, and with Other Two Wires in Parallel

Symmetry indicates that $E_1 = E_3 = E_5$, $E_2 = E_4$, $Q_1 = Q_5$, and $Q_2 = Q_4$. From the potential equations

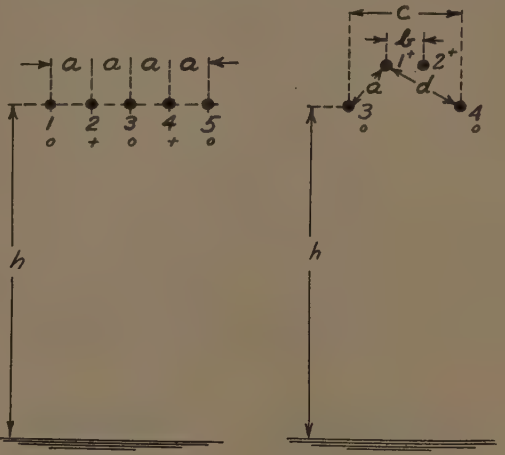

Fig. 5—Diagram for Case V.

Fig. 6—Diagram for Case VI.

written around these conditions it is necessary to solve for two different ratios which are

$$\frac{Q_1}{Q_2} = +\frac{\lg \frac{4h^2}{3a^2}\lg \frac{2h}{\rho} - \lg \frac{4h^2}{a^2}\lg \frac{h}{a}}{\lg \frac{h^2}{a^2}\lg \frac{h}{a} - \lg \frac{h^2}{a\rho}\lg \frac{2h}{\rho}} = A$$

$$\frac{Q_3}{Q_2} = +\frac{\lg \frac{4h^2}{3a^2}\lg \frac{h^2}{a^2} - \lg \frac{4h^2}{a^2}\lg \frac{h^2}{a\rho}}{\lg \frac{2h}{\rho}\lg \frac{h^2}{a\rho} - \lg \frac{h}{a}\lg \frac{h^2}{a^2}} = B$$

$$k = \frac{2Q_1 + Q_3}{2Q_2} = \frac{2A + B}{2}.$$

The reciprocal capacitance is

$$\frac{1}{C} = \frac{E_2}{2Q_2} = 69v\left[A \lg \frac{4h^2}{3a^2} + B \lg \frac{2h}{a} + \lg \frac{2h^2}{a\rho}\right]$$

and

$$Z_0 = 69\left[A \lg \frac{4h^2}{3a^2} + B \lg \frac{2h}{a} + \lg \frac{2h^2}{a\rho}\right].$$

A sample set of line values are shown in Table III.

TABLE III

h	ρ	a	A	B	k	Z_0
144	0.064	5	−0.46	−0.614	−0.767	187
144	0.064	10	−0.396	−0.548	−0.670	210

Case VI

Four Wires in Two Elevated Horizontal Planes, Symmetrically Disposed, with Two Lower Wires Grounded and Two Upper Wires Connected in Parallel

Except for geometry, this case is similar to that of Case IV.

$$k = \frac{Q_3 + Q_4}{Q_1 + Q_2} = -\frac{\lg \frac{4h^2}{ad}}{\lg \frac{4h^2}{\rho c}}.$$

The reciprocal capacitance is

$$\frac{1}{C} = \frac{E_1}{Q_1 + Q_2} = 69v\left[\lg \frac{4h^2}{\rho b} + k \lg \frac{4h^2}{ad}\right]$$

and

$$Z_0 = 69\left[\lg \frac{4h^2}{\rho b} + k \lg \frac{4h^2}{ad}\right].$$

The potential at a near-by point in space with respect to that of the high-potential wires is

$$\frac{E_p}{E_1} = \frac{\lg \frac{r_{11}r_{22}}{r_1r_2} + k \lg \frac{r_{33}r_{44}}{r_3r_4}}{\lg \frac{4h^2}{\rho b} + k \lg \frac{4h^2}{ad}}.$$

Some characteristic values for this type of line are given in Table IV.



Fig. 7—Diagram for Case VII.



Fig. 8—Diagram for Case VIII.

TABLE IV

h	ρ	a	b	c	d	k	Z_0
144	0.064	4.19	2.5	5	5.48	−0.655	235
144	0.064	5.50	2.5	10	7.45	−0.647	247
144	0.064	6.00	2.5	12	8.00	−0.643	251
120	0.064	6.00	2.5	12	8.90	−0.554	256

This type of line can be built with 1 pin insulator per pole with the 2 high-potential wires attached to opposite sides of the insulator groove.

Case VII

Four Wires at Corners of a Square, with Two Diagonal Wires Grounded and Two Others in Parallel[1]

$$k = -\frac{\lg \left(\frac{2h}{a}\right)^2}{\lg \frac{4h^2}{a\rho\sqrt{2}}}$$

$$C = \frac{1}{69v\left[\lg \frac{4h^2}{a\rho\sqrt{2}} + k \lg \left(\frac{2h}{a}\right)^2\right]} \text{ (farads per centimeter)}$$

$$Z_0 = 69\left[\lg \frac{4h^2}{a\rho\sqrt{2}} + k \lg \left(\frac{2h}{a}\right)^2\right] \text{ (ohms)}$$

when

$$\rho = 0.064 \text{ inch} \qquad a = 15 \text{ inches} \qquad h = 144 \text{ inches}$$

$$\alpha = \left[1.1\sqrt{\frac{10^{-13}}{\sigma_{emu}}} + 0.0925\right]\sqrt{f_{mc}} \text{ (decibels per 1000 feet)}$$

and

$$k = 0.526$$

$$Z_0 = 234.$$

Case VIII

Six Wires, Four in a Vertical Plane Grounded, with One Wire Symmetrically Disposed on Each Side and Connected in Parallel

To simplify the work, advantage can be taken of symmetry. So far as wire No. 1 is concerned, the presence of No. 6 is immaterial. The charges induced on the grounded wires by No. 1 are the same whether No. 6 is present or not; only their distribution is affected. Thus the problem can be solved from the left side alone and the effect of the total introduced later.

From this point on with No. 6 absent there is no symmetry to simplify the work so the five different Q's must be solved from the five potential equations. If solved symbolically, the work quickly runs to considerable proportions. It is much more convenient to solve the particular configuration by immediately substituting the numerical values of the various

logarithmic potential coefficients in the potential equations. The equations for the various characteristics are so bulky as hardly to justify the expenditure of space for them. Lines of this type have been constructed for broadcast use and with No. 8 wire (0.064-inch radius), a mean height of 12 feet, with wires 1, 2, 6, 5 spaced 15 inches and wires 2, 3, 4, 5 equispaced, measured values of Z_0 were 190.5 ohms. This compares with a theoretical value of 190 ohms for the configuration. The value of k is calculated to be -0.644 distributed as follows:

Per Cent	10.5 in No. 2
	19.4 in No. 3
	18.6 in No. 4
	15.9 in No. 5

Case IX

Five Wires, Four at Corners of a Square at Ground Potential, with Fifth at Center of Square[1]

$$k = -\frac{\lg \frac{2\sqrt{2}\,h}{a}}{\lg \frac{2h}{(\rho\sqrt{2})^{1/4}a^{3/4}}}$$

$$C = \frac{1}{138v\left[\lg \frac{2h}{\rho} + k \lg \frac{2\sqrt{2}\,h}{a}\right]} \text{ (farads per centimeter)}$$

$$Z_0 = 138\left[\lg \frac{2h}{\rho} + k \lg \frac{2\sqrt{2}\,h}{a}\right] \text{ (ohms).}$$

When

$\rho = 0.064$ inch $\quad a = 15$ inches $\quad h = 144$ inches

$k = -0.785 \quad Z_0 = 350$

$$\alpha = \left[0.151\sqrt{\frac{10^{-13}}{\sigma_{emu}}} + 0.11\right]\sqrt{f_{mc}} \text{ (decibels per 1000 feet).}$$

Case X

Six Wires, Four Grounded Wires at Corners of a Square with Other Two Wires in Parallel at the Center[1]

$$k = -\frac{\lg \frac{2h}{\sqrt{cd}}}{\lg \frac{2h}{\rho^{1/4}a^{1/2}(a\sqrt{2})^{1/4}}}$$

$$C = \frac{1}{69v\left[\lg \frac{4h^2}{\rho b} + k \lg \frac{4h^2}{cd}\right]} \text{ (farads per centimeter)}$$

$$Z_0 = 69\left[\lg \frac{4h^2}{\rho b} + k \lg \frac{4h^2}{cd}\right] \text{ (ohms).}$$

When

$\rho = 0.081$ inch $\quad h = 144$ inches

$a = 15$ inches $\quad b = 2.5$ inches

$k = -0.792 \quad Z_0 = 231$

$$\alpha = \left[0.214\sqrt{\frac{10^{-13}}{\sigma_{emu}}} + 0.0755\right]\sqrt{f_{mc}} \text{ (decibels per 1000 feet).}$$

This line represents one of the optimum configurations available using six wires. The value of k could be further increased by adding more grounded wires to enclose the high-potential wires.



Fig. 9—Diagram for Case IX.



Fig. 10—Diagram for Case X.

Case XI

Balanced Two-Wire Line Above Perfect Ground

This type of problem is developed in the same manner as the previous types but the physical considerations are different in certain respects. The potentials are reckoned with respect to ground, and are equal but opposite in sign.

$$E_1 = 138v\left[Q_1 \lg \frac{1}{\rho} - Q_1 \lg \frac{1}{2h} + Q_2 \lg \frac{1}{a} - Q_2 \lg \frac{1}{\sqrt{4h^2 + a^2}}\right].$$

Symmetry, characteristic of balanced-line problems, indicates that $Q_1 = -Q_2$ so that

$$E_1 = 138vQ_1 \lg \frac{2ha}{\rho\sqrt{4h^2 + a^2}}.$$

The reciprocal capacitance is

$$\frac{1}{C} = \frac{2E_1}{Q_1} = 276v \lg \frac{2ha}{\rho\sqrt{4h^2 + a^2}}$$

and

$$Z_0 = 276 \lg \frac{2ha}{\rho\sqrt{4h^2 + a^2}}.$$

As h becomes very large with respect to a

$$Z_0 \rightarrow 276 \lg \frac{a}{\rho}.$$

This latter is the form usually used for this type of line by neglecting the effect of ground.

The potential at a near-by point in space with respect to that on wire No. 1 is

$$\frac{E_p}{E_1} = \frac{\lg \dfrac{r_{11}r_2}{r_1r_{22}}}{\lg \dfrac{2ha}{\rho\sqrt{4h^2 + a^2}}}.$$

Case XII

Four-Wire Balanced Line in a Square Configuration with Opposite Wires Connected in Parallel

It is found in problems of this type that if the assumption is made that h is the same for all wires and image distances, the heights cancel out when the potential equations are developed. This is equivalent to

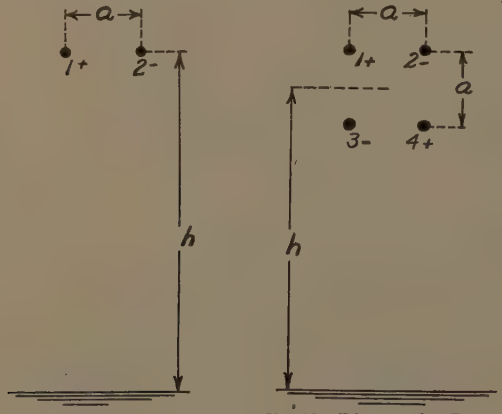

Fig. 11—Diagram for Case XI.

Fig. 12—Diagram for Case XII.

neglecting the presence of ground. So far as the line constants and the characteristic impedance are concerned, they can be derived as for a line in free space with great simplification of formulation. However, in the development of the field potentials the presence of ground cannot be neglected and it is then necessary to hold rigorously to the actual spacial dimensions for accuracy.

In free-space conditions, all the Q's have the same magnitude and one quickly arrives at

$$E_1 = 138vQ_1 \lg \frac{a}{\rho\sqrt{2}}$$

from which

$$\frac{1}{C} = \frac{2E_1}{2Q_1} = 138v \lg \frac{a}{\rho\sqrt{2}}$$

and

$$Z_0 = 138 \lg \frac{a}{\rho\sqrt{2}}.$$

In the presence of perfect ground, the potential at a point in near-by space with respect to that of wire No. 1 is

$$\frac{E_p}{E_1} = \frac{\lg \dfrac{r_2r_3r_{11}r_{44}}{r_1r_4r_{22}r_{33}}}{\lg \dfrac{a}{\rho\sqrt{2}}}$$

Case XIII

Six-Wire Balanced Line in Regular Hexagon Configuration, Alternate Wires Connected in Parallel

For free-space conditions, or where h is very large with respect to a,

$$E_1 = 138vQ_1 \lg \frac{2a^3}{\rho b}.$$

Taking into account three wires charged to potential E_1, the reciprocal capacitance is

$$\frac{1}{C} = \frac{2E_1}{3Q_1} = 92v \lg \frac{2a^3}{\rho b}$$

and

$$Z_0 = 96 \lg \frac{2a^3}{\rho b} \equiv 96 \lg \frac{1.15a^2}{\rho}.$$

The potential at a near-by point in space with respect to the potential at wire No. 1 is

$$\frac{E_p}{E_1} = \frac{\lg \dfrac{r_2r_4r_6r_{11}r_{33}r_{55}}{r_1r_3r_5r_{22}r_{44}r_{66}}}{\lg \dfrac{1.15a^2}{\rho}}.$$

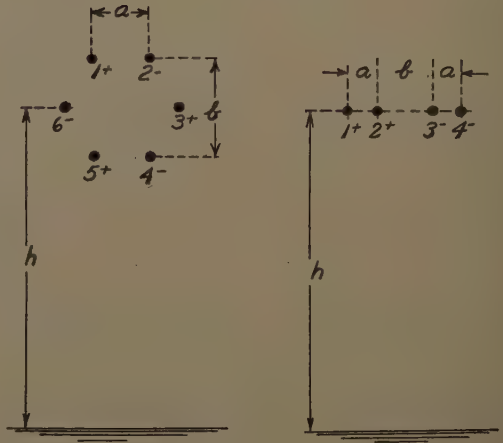

Fig. 13—Diagram for Case XIII. Fig. 14—Diagram for Case XIV.

Case XIV

Four-Wire Balanced Line in Planar Configuration, with Two Wires in Parallel on Each Side

Where very high power is transmitted over a balanced line it is sometimes desirable to reduce the potential on the line by reducing the characteristic impedance below that practicable with a two-wire line. A planar configuration of four wires is more economical than that of Case XII. The two wires on each side can often be supported by a common insulator.

In this case there is symmetry which makes $Q_1 = Q_4$ and $Q_2 = Q_3$. However, we must solve for the ratio $Q_2/Q_1 = K$.

After substitution and manipulation the potential equations reduce to

$$E_1 = 138v\left[Q_1 \lg \frac{2a+b}{\rho} + Q_2 \lg \frac{a+b}{a}\right]$$

$$E_2 = 138v\left[Q_1 \lg \frac{a+b}{a} + Q_2 \lg \frac{b}{\rho}\right] = E_1.$$

After solution

$$K = \frac{Q_2}{Q_1} = \frac{\lg \dfrac{a(2a+b)}{\rho(a+b)}}{\lg \dfrac{ab}{\rho(a+b)}}$$

(note that K is now positive. The reciprocal capacitance is

$$\frac{1}{C} = \frac{2E_1}{Q_1+Q_2} = \frac{2E_1}{Q_1(1+K)} = \frac{276v}{1+K}\left[\lg \frac{2a+b}{\rho} + K \lg \frac{a+b}{a}\right]$$

and

$$Z_0 = \frac{276}{1+K}\left[\lg \frac{2a+b}{\rho} + K \lg \frac{a+b}{a}\right].$$

The potential at a near-by point in space with respect to that on wire No. 1 is

$$\frac{E_p}{E_1} = \frac{\lg \dfrac{r_{11}r_4}{r_1r_{44}} + K \lg \dfrac{r_3r_{22}}{r_2r_{33}}}{\lg \dfrac{2a+b}{\rho} + K \lg \dfrac{a+b}{a}}.$$

Case XV

Four-Wire Balanced Line in Planar Configuration, Equispaced, with Alternate Wires Connected in Parallel

Another method of reducing the characteristic impedance of a balanced line is shown in this case.

The potential equations reduce to

$$E_1 = 138v\left[Q_1 \lg \frac{3a}{\rho} + Q_2 \lg \frac{1}{2}\right]$$

$$E_2 = 138v\left[Q_1 \lg 2 + Q_2 \lg \frac{\rho}{a}\right] = -E_1$$

from which

$$K = \frac{Q_2}{Q_1} = \frac{\lg \dfrac{6a}{\rho}}{\lg \dfrac{2a}{\rho}}.$$



Fig. 15—Diagram for Case XV.

The reciprocal capacitance is

$$\frac{1}{C} = \frac{2E_1}{Q_1+Q_2} = \frac{2E_1}{Q_1(1+K)} = \frac{276v}{1+K}\left[\lg \frac{3a}{\rho} + K \lg \frac{1}{2}\right]$$

and

$$Z_0 = \frac{276}{1+K}\left[\lg \frac{3a}{\rho} + K \lg \frac{1}{2}\right].$$

The potential at a near-by point in space with respect to that of wire No. 1 is

$$\frac{E_p}{E_1} = \frac{\lg \dfrac{r_4r_{11}}{r_1r_{44}} + K \lg \dfrac{r_2r_{33}}{r_3r_{22}}}{\lg \dfrac{3a}{\rho} + K \lg \dfrac{1}{2}}.$$

Application to Low-Frequency Antenna Design[3]

The low-frequency antenna appears again and again in daily engineering work and the problem is always to build the maximum antenna with given size and height limitations. Lacking height, the horizontal part of the antenna is proportioned to give maximum capacitance to increase the effective height and to minimize the input reactance. Since the mechanical problems are inextricably related to the electrical, to say nothing of the economic, it remains in each case to determine maximum results from minimum material.

From given lineal dimensions in an electrically short

[3] F. W. Grover, "Methods, Formulas and Tables for the Calculation of Antenna Capacity," Bureau of Standards Scientific Paper No. 568; *Bur. Stand. Bull.*, vol. 22, pp. 568–629; January, 1928.

antenna, the reduction of base reactance is dependent upon reduction of the characteristic impedance of the antenna from a transmission-line viewpoint. This is accomplished by maximizing the capacitance per unit length by a multiwire configuration. The cage and the planar flat-top arrangements are well known for this purpose.

Logarithmic potential theory is helpful in deriving economically optimum designs for multiwire low-frequency antennas. While the horizontal portion lends itself to the mathematical circumstances with ease, the vertical portion does not. However, it seems, from

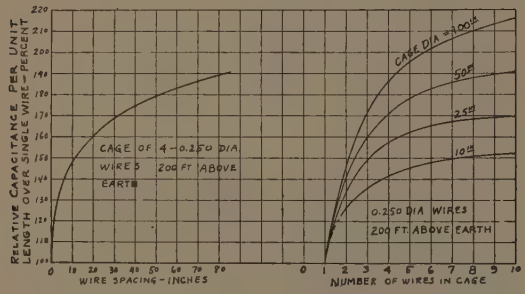
RELATIVE CAPACITANCE PER UNIT LENGTH OVER SINGLE WIRE—PERCENT
CAGE OF 4—0.250 DIA WIRES 200 FT ABOVE EARTH
WIRE SPACING—INCHES
CAGE DIA = 100FT
50FT
25FT
10FT
0.250 DIA WIRES 200 FT ABOVE EARTH
NUMBER OF WIRES IN CAGE

Fig. 16—Curves of capacitance per unit length for cage flat-tops.

experience, to be physically justifiable to treat any unit length of the vertical portion as though it were horizontal at the mean height of that particular unit of length. In this way the entire antenna can be worked out satisfactorily, leaving only end effects to be estimated.

The Cage Antenna

From previous procedure it is seen that we can choose any desired cross-sectional configuration for a system of elevated horizontal wires and solve the potential-charge equations to derive the capacitance per unit length provided the dimensions involved are small with respect to the wavelength. We can then compare this with the capacitance of one wire at the same mean location. Take for example a four-wire cage, where the interwire spacing is very small with respect to the height above earth. All wires are at the same potential and with small error we can say the charges are the same on all wires. In these circumstances the potential-charge equations reduce to

$$E_1 = 138 v Q_1 \lg \frac{16h^4}{\rho a^3 \sqrt{2}}$$

from which the capacitance per centimeter is

$$C_1 = \frac{1}{34.5 v \lg \dfrac{16h^4}{\rho a^3 \sqrt{2}}}.$$

The capacitance for a single wire is

$$C_0 = \frac{1}{138 v \lg \dfrac{2h}{\rho}}$$

so that

$$\frac{C_1}{C_0} = \frac{4 \lg \dfrac{2h}{\rho}}{\lg \dfrac{16h^4}{\rho a^3 \sqrt{2}}}.$$

The data of Fig. 16 were computed in this manner and enable one to determine quickly a reasonable cage configuration.

Multiwire Flat-Top Antenna

Take, for example, a four-wire flat-top with a uniform spacing a between wires at a height h above ground. While all wires are at the same potential, the charges on the 2 inner wires are not the same as those on the 2 outer wires. It is therefore necessary to solve for the ratio of charges. From the potential-charge equations (wires numbered 1 to 4 left to right)

$$K = \frac{Q_2}{Q_1} = \frac{\lg \dfrac{2a}{3\rho}}{\lg \dfrac{2a}{\rho}}.$$

The capacitance per centimeter becomes

$$C = \frac{2(Q_1 + Q_2)}{E_1} = \frac{2Q_1(1+K)}{E_1}$$

$$= \frac{1}{\dfrac{69v}{1+K}\left[\lg \dfrac{4h^2}{3a\rho} + K \lg \dfrac{2h^2}{a^2}\right]}.$$

Compared with a single wire of same size and height

$$\frac{C_1}{C_0} = \frac{138 \lg \dfrac{2h}{\rho}}{\dfrac{69}{1+K}\left[\lg \dfrac{4h^2}{3a\rho} + K \lg \dfrac{2h^2}{a^2}\right]}.$$

An Analytical Demonstration of Hartley Oscillator Action*

F. A. RECORD†, ASSOCIATE, I.R.E., AND J. L. STILES‡, ASSOCIATE, I.R.E.

Summary—An analytical solution of the Hartley oscillator circuit is made to determine the amplitude of the alternating voltage of the output wave in terms of the tube and circuit parameters. The approach to the solution makes use of a rotating vector, which alternately gains and decays in amplitude, applied to idealized tube characteristics. The growth and decay of the vector points up the regions of amplification and nonamplification of the oscillation.

The paper is divided into sections:

I. The differential equation of the circuit is set up with the aid of certain simplifying assumptions and put in a form for convenient use.

II. The equation is applied to a class C condition using an idealized tube characteristic without saturation. The points of demarcation between amplification and nonamplification are determined and the amplitude of the alternating output voltage is calculated.

III. The equation is applied to a class C condition using an idealized tube characteristic with saturation but otherwise following the procedure of Section II.

Introduction

WITH THE notable exceptions of van der Bijl's early analysis of the tuned plate oscillator and the later work of Prince[1] and van der Pol,[2] English-language literature on the subject has largely consisted of the determination of the conditions necessary for oscillation.

The present paper is an attempt to present a reasonably comprehensive analysis of the Hartley oscillator circuit in such a manner that the action of the circuit is demonstrated as the analysis proceeds. This demonstration is built around a method of determining the amplitude of oscillation due to Guillemin.[3] This method emphasizes the regions of amplification and nonamplification of the oscillation and their relation to the action of the circuit.

Certain simplifying assumptions are made in forming the original equations not only because these conditions may be approximated in practice but also to obtain a more concise initial statement of the action of the circuit.

* Decimal classification: R355.9×R133. Original manuscript received by the Institute, October 7, 1940; revised manuscript received, February 3, 1943.

† Clarkson College, Potsdam, New York; on leave at the Radio Research Division, Harvard University, Cambridge, Massachusetts.

‡ Clarkson College, Potsdam, New York.

[1] D. C. Prince, "Vacuum tubes as power oscillators," PROC. I.R.E., vol. 11, pp. 275–313; June; pp. 405–459; August; and pp. 527–551; October, 1923.

[2] Balth. van der Pol, "The nonlinear theory of electric oscillations," PROC. I.R.E., vol. 22, pp. 1051–1086; September, 1934.

[3] E. A. Guillemin, "An analytical method of predetermining behavior of vacuum-tube oscillator, which yields regions of oscillation and nonoscillation, the amplitude of oscillation, and wave form," presented, Boston Section, Harvard University, Cambridge, Massachusetts, October 25, 1935.

Section I

Formation of the Differential Equation of the Circuit

Reference to the schematic diagram of the Hartley circuit, Fig. 1, shows that

$$i_{Lg} + i_p = i_{Lp}. \tag{1}$$

In this and the following

e = instantaneous alternating components of voltage

i = instantaneous alternating components of current.

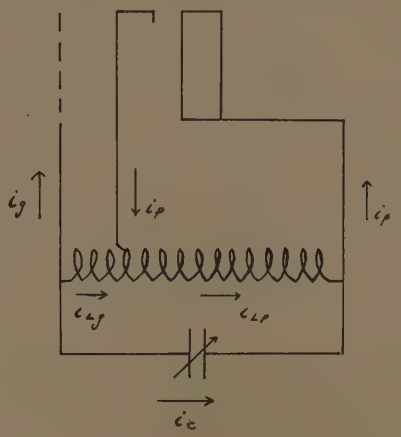

Fig. 1—Schematic diagram of Hartley circuit.

But, approximately, $i_{Lp} = Qi_p$ since this is a parallel circuit condition. Q has the usual definition of $\omega L/R$. Therefore, $i_{Lg} = i_{Lp} = i_L$, approximately, where i_L is taken as the approximate magnitude of the current throughout the coil, based on the assumptions that $Q \gg 1$ and $i_g \ll i_{Lg}$. If the coefficient of coupling is nearly unity the ratio of e_g to e_p becomes, without regard to sign,

$$\left.\begin{aligned} \frac{e_g}{e_p} &= \frac{n_g}{n_p} = \rho \\ \text{and} \qquad i_p &= i_L + i_c \end{aligned}\right\}. \tag{2}$$

Here n_g and n_p are, respectively, the number of turns on the grid side of the tap and on the plate side. If e_p and e_g are tube voltages, then the coil voltages will be $-e_p$ and $-e_g$ and

$$i_c = C \frac{d}{dt}(-e_p - e_g).$$

Whence

$$i_p = i_L + C\frac{d}{dt}(-e_p - e_g).$$

Also

$$(-e_p - e_g) = i_L R + L\frac{di_L}{dt}.$$

Letting $d/dt = p$, i_p becomes

$$i_p = -\frac{e_p + e_g}{R + Lp} - Cp(e_p + e_g)$$

$$= -\frac{e_p + \rho e_p}{R + Lp} - Cp(e_p + \rho e_p)$$

$$i_p = -\left\{\frac{\rho + 1}{R + Lp} + Cp(\rho + 1)\right\}e_p. \qquad (3)$$

For convenience, e_p is considered a voltage rise and e_g a voltage drop, although both are normally considered rises. This yields the equation for the combined control voltage

$$e = \frac{e_p}{\mu} - e_g = \left(\frac{1}{\mu} - \rho\right)e_p. \qquad (4)$$

Substituting (4) in (3)

$$i_p = \frac{-\left\{\dfrac{\rho + 1}{R + Lp} + Cp(\rho + 1)\right\}e}{\dfrac{1}{\mu} - \rho} = g_m e$$

or

$$\left\{\frac{\rho + 1}{R + Lp} + Cp(\rho + 1) + g_m\left(\frac{1}{\mu} - \rho\right)\right\}e = 0. \qquad (5)$$

Arranging (5) as a polynomial in p gives

$$\left[p^2 + p\left\{\frac{R}{L} - \frac{g_m}{C}\left(\frac{\rho - \dfrac{1}{\mu}}{\rho + 1}\right)\right\} + \left\{\frac{1}{LC} - \frac{g_m R}{LC}\left(\frac{\rho - \dfrac{1}{\mu}}{\rho + 1}\right)\right\}\right] = 0 \qquad (6)$$

which is a suitable form for the differential equation of the circuit in accordance with the various approximations and assumptions.

Section II

Application of the Equation to a Class C Condition Using an Idealized Tube Characteristic without Saturation. Determination of the Points of Demarcation Between Amplification and Nonamplification and of the Amplitude of the Alternating Output Voltage.

The coefficient of the linear term of (6) represents the decay or damping factor, hence,

$$\alpha = \frac{R}{2L} - \frac{g_m}{2C}\left\{\frac{\mu\rho - 1}{\mu(\rho + 1)}\right\}. \qquad (7)$$

Following the method of Guillemin, the tube characteristic is idealized by considering it to be made up of straight lines, Fig. 2. Class A, B, and C operating points are indicated although only class C will be considered. It can be seen from the figure that under class C conditions, unsaturated, Fig. 2(b), the tube and

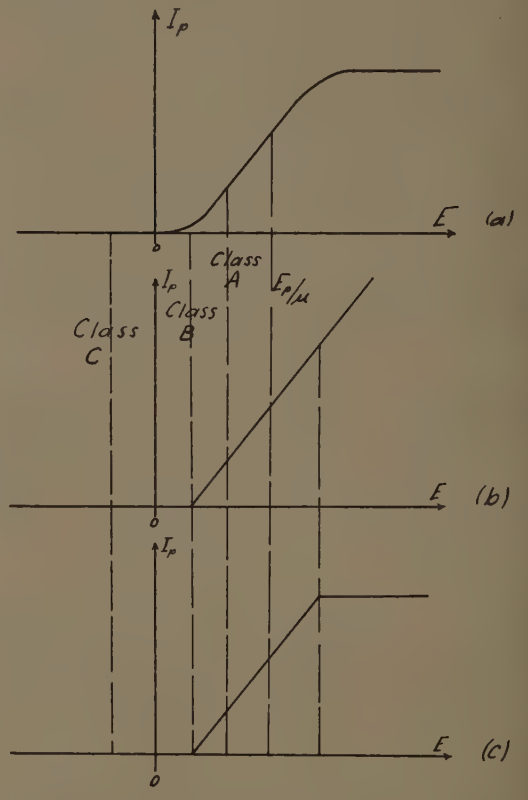

Fig. 2

(a) Plate-current combined control-voltage transfer characteristic of actual tube.
E = the sum of instantaneous alternating- and direct-current values
I = the sum of instantaneous alternating- and direct-current values
(b) Idealized transfer characteristic without saturation.
(c) Idealized transfer characteristic with saturation.

circuit operate over a range of zero plate current and a range of rising plate current. This means that two damping factors obtain. One, during zero plate current, when g_m is zero, is

$$\alpha_1 = R/2L. \qquad (7a)$$

The other, during rising plate current, is given in (7). It seems clear that these two damping factors apply, respectively, to the regions of nonamplification and amplification of the oscillation.

Although it is known that class C operation is unstable without the limiting effects of saturation, the unsaturated case will be considered as an outline of the method used to determine the amplitude.

Reference to Fig. 3 shows a linear tube characteristic with an operating combined control voltage E_{a1}. Below the characteristic the instantaneous combined control voltage e is representated as the horizontal projection of a variable length vector A, rotating in a counterclockwise direction with a constant angular velocity ω. Thus A represents the amplitude of the oscillation in terms of the combined control voltage.

As the vector rotates from A to A_1 the g_m is zero and A will decrease exponentially with the damping factor α_1, thus marking a region of nonamplification. From A_1 to A the amplitude must, for stability, increase exponentially with the factor α to its original value, thus marking a region of amplification. This means that the factor α must be negative; that is,

$$\left| \frac{g_m}{2C} \left\{ \frac{\mu\rho - 1}{\mu(\rho + 1)} \right\} \right| > \left| \frac{R}{2L} \right|. \tag{9}$$

The amplitude at an angle γ, $A\gamma$, is

$$A\gamma = A \exp \left\{ - \frac{\gamma}{\omega} \alpha_1 \right\}.$$

Thus

$$A_1 = A \exp \left\{ - a(2\pi - \phi_1 - \phi_2) \right\} \tag{10}$$

and

$$A = A_1 \exp \left\{ b(\phi_1 + \phi_2) \right\} \tag{11}$$

where

$$a = \frac{\alpha_1}{\omega} \quad \text{and} \quad b = \frac{-\alpha}{\omega}. \tag{11a}$$

The condition that the vector shall return to its original length after one complete revolution, is, from Fig. 3,

$$\exp \left\{ - a[2\pi - (\phi_1 + \phi_2)] + b(\phi_1 + \phi_2) \right\} = 1$$

and, therefore,

$$\frac{\phi_1 + \phi_2}{2} = \frac{\pi a}{a + b}. \tag{12}$$

But since A_1 is only slightly smaller than A, ϕ_1 is nearly equal to ϕ_2, and from (12)

$$\phi_1 = \phi_2 = \phi = \frac{\pi a}{a + b}, \text{ approximately.} \tag{13}$$

Returning to Fig. 3, it can be seen that

$$E_{a1} = A \cos \phi_1 = A \cos \phi.$$

Hence the amplitude of oscillation A is

$$A = \frac{E_{a1}}{\cos \phi_1}. \tag{14}$$

Also from (4) and (14),

$$e = \text{Re}\{A \exp (j\omega t)\} = \left(\frac{1}{\mu} - \rho \right) e_p$$

in which "Re" means "real part of," or

$$e_p = \text{Re} \left\{ \frac{A}{\left(\frac{1}{\mu} - \rho \right)} \exp (j\omega t) \right\} = V_p \cos \omega t \tag{15}$$

and

$$V_p = \frac{A}{\left(\frac{1}{\mu} - \rho \right)} \tag{16}$$

which together with (2), (7), (7a), (11a), (13), and (14), gives the maximum amplitude of the alternating component of the plate voltage in terms of the tube and circuit parameters and the operating tube voltage E_{a1}.

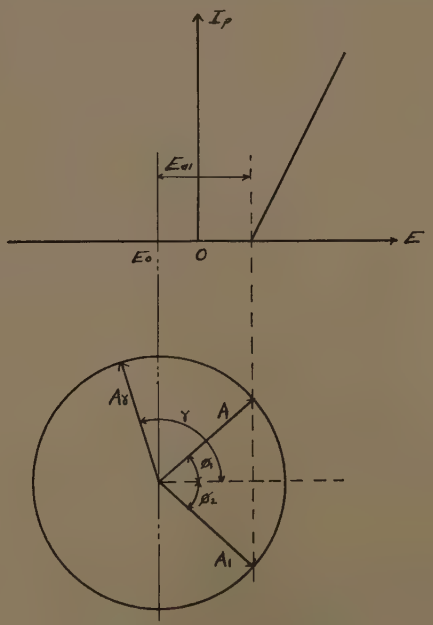

Fig. 3—Amplitude of oscillation projected on transfer characteristic without saturation.

Section III

Application of the Equation to a Class C Condition Using an Idealized Tube Characteristic with Saturation, with the Same Determinations as in Section II.

The practical idealized characteristic, including the effects of saturation is shown in Fig. 2(c). It is due to the combined effects of grid and plate saturation that

operating stability of amplitude is obtained under class C conditions.

The transfer characteristic and vector diagram is shown in Fig. 4 for this case. As before, the instantaneous combined control alternating voltage e is represented as the horizontal projection of a variable-length vector A, rotating in a counterclockwise direction with a constant angular velocity ω.

As the vector rotates from A to A_1 the g_m is zero, and A will decrease exponentially with the damping factor α_1, thus marking a region of nonamplification. As it moves from A_1 to A_2 the amplitude, for stability, must increase exponentially with the negative factor α, thus marking a region of amplification. At A_2 the saturated condition is met, the main point of difference between this section and the preceding. As A moves from A_2 to A_3, g_m is again zero and A decreases with the factor α_1, marking a second region of nonamplification. In order that the oscillations be sustained and stable A must return to its original length. The meeting of this condition is completed by an increase from A_3 to A_4 similar to the one from A_1 to A_2, thus marking the second region of amplification. From the foregoing it can be seen that

$$\left.\begin{aligned} A_1 &= A \exp\{-a(2\pi - 2\theta)\} \\ A_2 &= A_1 \exp\{b(\theta - \phi)\} \\ A_3 &= A_2 \exp\{-2a\phi\} \\ A_4 &= A_3 \exp\{b(\theta - \phi)\} = A \end{aligned}\right\}. \tag{17}$$

Again the condition for closure for the vector diagram requires that the sum of the exponentials be zero. Whence

$$\theta - \phi = \frac{\pi a}{a + b}. \tag{18}$$

Again, from Fig. 4,

$$E_{a1} = A \cos\theta. \tag{19}$$

Also

$$E_{a2} = A_3 \cos\phi = A \exp\{-b(\theta - \phi)\} \cos\phi. \tag{20}$$

Dividing (20) by (19) and substituting (18)

$$\frac{\cos\phi}{\cos\theta} = \frac{E_{a2}}{E_{a1}} \exp\left\{\frac{\pi ab}{a + b}\right\}. \tag{20a}$$

Solving[4] this for $\cos\theta$ gives

$$\cos\theta = \frac{\sin\left(\dfrac{\pi a}{a + b}\right)}{\sqrt{\left(\dfrac{E_{a1}}{E_{a2}}\right)^2 \exp 2\left\{\dfrac{\pi ab}{a + b}\right\} - 2\dfrac{E_{a1}}{E_{a2}} \cos\dfrac{\pi a}{a + b} \exp\left\{\dfrac{\pi ab}{a + b}\right\} + 1}}. \tag{21}$$

[4] See Appendix for a solution of (20a).

As before

$$A = \frac{E_{a1}}{\cos\theta}. \tag{22}$$

From (4) and (22)

$$e = \mathrm{Re}\{A \exp(j\omega t)\} = \left(\frac{1}{\mu} - \rho\right) e_z$$

or,

$$e_p = \mathrm{Re}\left\{\frac{A}{\left(\dfrac{1}{\mu} - \rho\right)} \exp(j\omega t)\right\} = V_p \cos\omega t$$

and

$$V_p = \frac{A}{\left(\dfrac{1}{\mu} - \rho\right)} \tag{23}$$

which gives V_p in the same form as before except that the operating tube voltage E_{a2} is included.

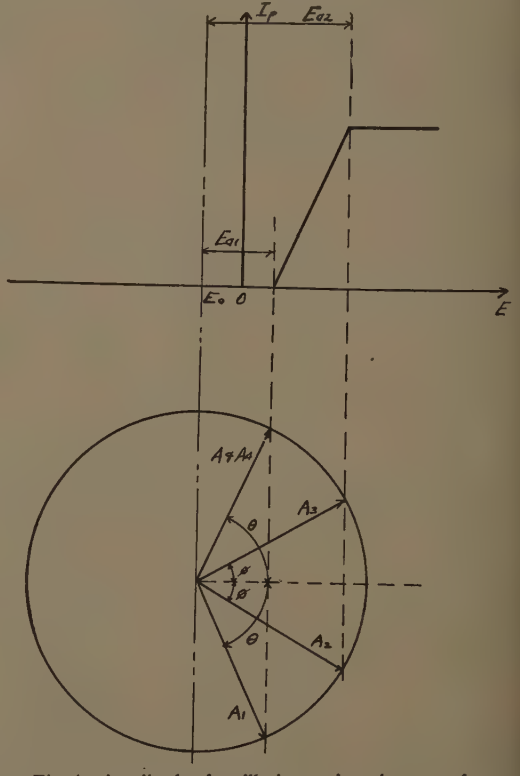

Fig. 4—Amplitude of oscillation projected on transfer characteristic with saturation.

Comparative Discussion

Numerical Comparison between Values of A Calculated by the Method of the Paper and the "average g_m" Method is Offered for the Unsaturated Class C Case.

Perhaps the first as well as one of the best ways in which to examine an equation or a method of analysis critically is by direct comparison with another method of approach to the same problem.

Aside from the demonstration of the action of the circuit, one of the alternative methods of determining the amplitude of oscillation A involves the averaging of the g_m over the working cycle. Fortunately there is available a direct comparison between the values of A calculated for the unsaturated class C case by each method.

Reference to Fig. 5 shows the following relationships:

$$g_m = \frac{h}{A - E_{a1}} \tag{24}$$

$$g_{m\ \text{average}} = \frac{h}{2A} = \frac{g_m(A - E_{a1})}{2A}. \tag{25}$$

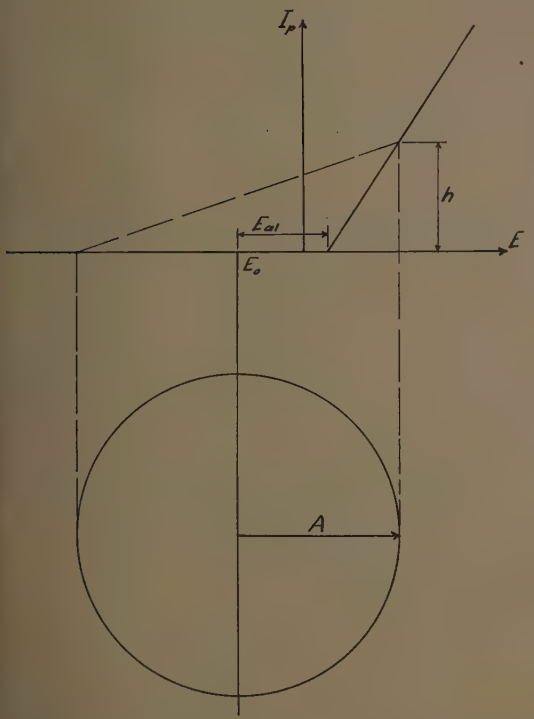

Fig. 5—Relations between average and actual mutual conductance.

The closure condition suitable with this case is

$$\alpha = 0. \quad \text{Or} \quad \frac{R}{2L} = \frac{g_{m\ \text{avg}}}{2C}\left\{\frac{\mu\rho - 1}{\mu(\rho + 1)}\right\}. \tag{26}$$

Thus

$$g_{m\ \text{avg}} = \frac{RC}{L\left\{\dfrac{\mu\rho - 1}{\mu(\rho + 1)}\right\}} = \frac{g_m(A - E_{a1})}{2A}$$

by combining (25) and (26).

From the above

$$A = \frac{E_{a1}}{1 - \dfrac{2RC}{g_m L\left\{\dfrac{\mu\rho - 1}{\mu(\rho + 1)}\right\}}}. \tag{27}$$

Also from (11a)

$$b = \frac{-\alpha}{\omega} \quad \text{and} \quad a = \frac{\alpha_1}{\omega}.$$

Thus

$$\frac{b}{a} = \frac{\text{rate of gain}}{\text{rate of decay}} = \frac{-\alpha}{\alpha_1} = \frac{-\dfrac{R}{2L} + \dfrac{g_m}{2C}\left\{\dfrac{\mu\rho - 1}{\mu(\rho + 1)}\right\}}{\dfrac{R}{2L}}$$

$$= -1 + \frac{Lg_m}{RC}\left\{\frac{\mu\rho - 1}{\mu(\rho + 1)}\right\}. \tag{28}$$

Rearranging (28)

$$\frac{b}{a} + 1 = \frac{a + b}{a} = \frac{Lg_m\left\{\dfrac{\mu\rho - 1}{\mu(\rho + 1)}\right\}}{RC}. \tag{28a}$$

Combining (27) and (28a) gives the value of A by the "average g_m" method,

$$A = \frac{E_{a1}}{1 - \dfrac{2a}{a + b}}. \tag{29}$$

This value of A may now be compared numerically with the value obtained with the method of the paper for differing values of b/a as a common independent variable.

TABLE I

Column 1 $\frac{b/a}{\text{rate of gain}/\text{rate of decay}}$	*Column 2* $\frac{\lvert A\rvert}{E_{a1}}$ by Guillemin method (14) $= \frac{}{\cos \pi/1+b/a}$	*Column 3* $\frac{\lvert A\rvert}{E_{a1}}$ by "average g_m" method (29) $= \frac{}{1-2/1+b/a}$	*Column 4* Percentage difference $= \frac{③-②}{③} \times 100$
	E_{a1}	E_{a1}	
0	1.000	1.00	0
¼	1.235	1.67	26
⅓	2.000	3.00	33
½	4.450	7.15	38
1	indeterminate	—	—
2	2.000	3.00	33
4	1.235	1.67	26
9	1.050	1.25	16
∞	1.000	1.00	0

Examination of Table I shows that the quality of the circuit is a linear function of the value of b/a. The cases of b/a equal to zero and infinity are obviously limiting ones of the worse possible and the best possible circuit conditions neither of which would be reached in fact. The range between 1 and infinity is the most

practical and a considerable percentage difference is found over the probable operating range of 2 to 9.

General Discussion

The expressed purpose of the paper, to "present an analysis in such a manner that the action of the circuit is demonstrated as the analysis proceeds" has been portrayed in Section II. Regions of amplification and nonamplification of the oscillation are clearly denoted both by the figures and by the values of α and α_1.

The values of V_p given in (16) and (23) are so arranged as to be in a concise form even though considerable numerical calculation may underlie them. For the purpose of numerical calculation the value of (23) would be improved if some reasonable approximation for $\cos\theta$ (21) were available. A suggestion in this direction is given in the Appendix where $\cos\theta$ is determinable as the ratio of the sides of a triangle from (21a). Naturally the forms leave nothing to be desired from the standpoint of simplicity if the values of the operating angles ϕ and θ are known. Unfortunately, oscillator analysis as it nears exactitude always seems to become numerically complicated as was remarked by van der Pol.[2]

Some discussion of the various terms may be in order. V_p is perhaps the correct answer to the problem of oscillator analysis representing as it does the maximum amplitude of the alternating voltage across the plate coil. It is to be noted that the value of ρ is made negative in fact by the assumption of a positive μ and the assumptions in (4). The values of E_{a1} and E_{a2} may be readily determined from a study of the actual characteristic of the tube and a knowledge of the practical operating voltage E_0, desired. The value of R must of course include the reflected value of any load.

Acknowledgment

The writers wish to acknowledge the many helpful suggestions given them by Professor E. A. Guillemin during the preparation of the paper.

Appendix

From (20a) let

$$P = \frac{\cos\phi}{\cos\theta} = \frac{E_{a2}}{E_{a1}} \exp\left\{\frac{\pi a b}{a+b}\right\}. \tag{30}$$

Then

$$\frac{P-1}{P+1} = \frac{\cos\phi - \cos\theta}{\cos\phi + \cos\theta} = \frac{\sin\left(\frac{\theta+\phi}{2}\right)\sin\left(\frac{\theta-\phi}{2}\right)}{\cos\left(\frac{\theta+\phi}{2}\right)\cos\left(\frac{\theta-\phi}{2}\right)}$$

$$= \tan\left(\frac{\theta+\phi}{2}\right)\tan\left(\frac{\theta-\phi}{2}\right) \tag{31}$$

or,

$$\tan\left(\frac{\theta+\phi}{2}\right) = \frac{P-1}{P+1}\operatorname{ctn}\left(\frac{\theta-\phi}{2}\right). \tag{32}$$

Therefore,

$$\frac{\theta+\phi}{2} = \tan^{-1}\left[\frac{P-1}{P+1}\operatorname{ctn}\left(\frac{\pi a}{2(a+b)}\right)\right]. \tag{33}$$

Solving (33) and (18) for θ and ϕ

$$\theta = \frac{\pi a}{2(a+b)} + \tan^{-1}\left[\frac{P-1}{P+1}\operatorname{ctn}\left(\frac{\pi a}{2(a+b)}\right)\right] \tag{34}$$

$$\phi = -\frac{\pi a}{2(a+b)} + \tan^{-1}\left[\frac{P-1}{P+1}\operatorname{ctn}\left(\frac{\pi a}{2(a+b)}\right)\right]. \tag{35}$$

Fig. 6 shows a right-angle triangle constructed from (33).



Fig. 6

Then from (34), the relation in the triangle, and the relation $\cos(x+y) = \cos x \cos y - \sin x \sin y$

$$\cos\theta = \cos\left[\frac{\pi a}{2(a+b)} \times \frac{1}{\sqrt{1+[\ ]^2}}\right] - \sin\left[\frac{\pi a}{a+b} \times \frac{[\ ]}{\sqrt{1+[\ ]^2}}\right] \tag{36}$$

or,

$$\cos\theta = \frac{\cos\frac{\pi a}{2(a+b)} - \frac{P-1}{P+1}\cos\frac{\pi a}{2(a+b)}}{\sqrt{1+\left(\frac{P-1}{P+1}\right)^2 \operatorname{ctn}^2\frac{\pi a}{2(a+b)}}}. \tag{37}$$

Simplifying (37),

$$\cos\theta = \frac{2\cos\frac{\pi a}{2(a+b)}}{\sqrt{(P+1)^2 + (P-1)^2\operatorname{ctn}^2\frac{\pi a}{2(a+b)}}}$$

$$\cos\theta = \frac{2\cos\frac{\pi a}{2(a+b)}}{\sqrt{P^2\left\{1+\operatorname{ctn}^2\frac{\pi a}{2(a+b)}\right\} + 2P\left\{1-\operatorname{ctn}^2\frac{\pi a}{2(a+b)}\right\} + \left\{1+\operatorname{ctn}^2\frac{\pi a}{2(a+b)}\right\}}}$$

and, since,

$$1 + \operatorname{ctn}^2 \frac{\pi a}{2(a+b)} = \frac{1}{\sin^2 \dfrac{\pi a}{2(a+b)}}$$

and

$$2 \cos \frac{\pi a}{2(a+b)} \sin \frac{\pi a}{2(a+b)} = \sin \frac{\pi a}{a+b}$$

$$\cos \theta = \frac{\sin \dfrac{\pi a}{(a+b)}}{\sqrt{P^2 + 1 - 2P \cos \dfrac{\pi a}{(a+b)}}} \quad (38) \text{ or } (21a)$$

which, on substituting the value of P, (30), yields (21). By the cosine law the denominator of (21a) may be

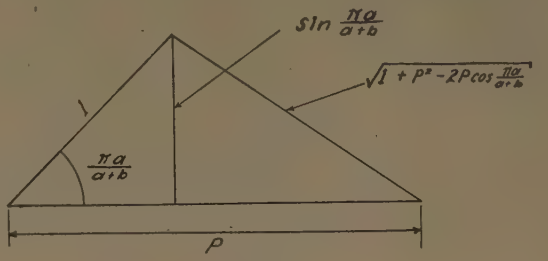

Fig. 7

represented as shown in Fig. 7. Thus $\cos \theta$ becomes the ratio of the altitude to the side opposite angle $\pi a/(a+b)$.

Book Reviews

"Ultra-High-Frequency Techniques," Edited by J. G. Brainerd in collaboration with Glenn Koehler, Herbert J. Reich, and L. F. Woodruff ..... L. E. Whittemore 309
"Short Wave Radio," by J. H. Reyner ..... Ralph R. Batcher 310
"Television Standards and Practice," Edited by Donald G. Fink ..... Peter C. Goldmark 310
"Electromechanical Transducers and Wave Filters," by Warren P. Mason ..... Harold A. Wheeler 310
"Electronics," by Jacob Millman and Samuel Seeley ..... W. G. Dow 310
"Experimental Electronics," by Ralph H. Müller, R. L. Garman, and M. E. Droz ..... Harley Iams 311
"Gaseous Conductors, Theory and Engineering Applications," by James Dillon Cobine ..... Dayton Ulrey 311
"A Guide to Cathode Ray Patterns," by Merwyn Bly ..... R. R. Batcher 312
"The Mathematics of Wireless," by Ralph Stranger ..... Frederick W. Grover 312
"American Standard Definitions of Electrical Terms," Published by the American Institute of Electrical Engineers ..... Haraden Pratt 312
"Introduction to Electricity and Optics," by Nathaniel H. Frank ..... H. M. Turner 312
"The Radio Amateur's Handbook, Twentieth (1943) Edition," by the Headquarters Staff of the A.R.R.L. ..... E. B. Ferrell 313

The Institute desires to present to the readers of the PROCEEDINGS effective material of timely value having major tutorial aspects. In pursuance of this policy there are included in the two preceding issues of the PROCEEDINGS and in this issue, installments covering a portion of the text of a forthcoming volume entitled: "Radio Engineers Handbook." Through the courtesy of its author, Professor Frederick E. Terman (at present Director of the Radio Research Laboratory operating under the supervision of the Office of Scientific Research and Development at Harvard University) and of the publishers, the McGraw-Hill Book Company, New York, N. Y., permission has been granted to the PROCEEDINGS to place this material before our readers. Appreciation of this co-operation is here expressed.

The Editor

Network Theory, Filters, and Equalizers*

FREDERICK E. TERMAN†, FELLOW, I.R.E.

PART III

Summary—Part III is concerned with ladder and lattice filters, attenuation and phase equalizers, and dividing networks.

The fundamental equations and design procedures involved in both ladder and lattice filters are reviewed. Tables and charts are given for aiding in the design of *M*-derived filters having terminal half sections. It is possible in this way, without making calculations other than placing numbers in simple formulas, to design filters having characteristics that will meet most requirements.

Consideration is given to filters terminated with other than half sections, particularly *MM'* and fraction terminations. A chart is given for the design of *MM'* terminating sections, which give unusually good impedance characteristics at the terminals. Fractional terminations, which are used when filters are to be placed in series or in parallel, are considered with particular reference to complementary filters.

The factors controlling the cutoff frequencies, attenuation and phase characteristics, and impedance characteristics of lattice filters are reviewed. The attenuation and phase behavior of such filters can be given almost any desired characteristic by suitably locating an adequate number of critical frequencies (i.e., zeros and poles of impedance) in the pass bands, while the behavior of the image impedances can be similarly controlled by the location and number of the critical frequencies in the attenuating bands. Particular consideration is given to the requirements that the critical frequencies in the pass band must satisfy in order to obtain a substantially linear phase-shift characteristic in the pass band.

The relationship between ladder and lattice filters is reviewed. The transformation whereby any ladder can be converted to a lattice is given, and it is shown that under certain conditions a lattice can be developed into a physically realizable ladder or bridged-T network. The lattice is the most general type of four-terminal network, whereas the ladder type is more specialized so that in some cases a lattice cannot be reduced to a ladder having physically realizable arms.

Attenuation equalizers are considered, and it is shown that all of the common types have a common insertion-loss formula in which the transmission characteristic is determined by the nature of one impedance arm. A design chart is given whereby a variety of insertion-loss characteristics can be realized, based on simple impedance arms. More complicated insertion-loss characteristics are obtained by placing a number of simple equalizer sections in tandem.

All-pass filters for phase equalizers are considered briefly, and it is shown that the phase-shift characteristics are controlled by the number and location of the internal zeros and poles of the lattice impedances.

Two types of dividing networks for such applications as dual-channel loudspeakers are considered. One of these is a constant-resistance type of network, which provides constant input resistance for all frequencies. The other is based upon complementary filters, and leads to slightly different, but substantially equivalent, results.

XI. *M*-DERIVED (LADDER) FILTERS[22]

A FILTER can be considered as a four-terminal network in which the image transfer constant has a value that is either small or zero in a particular range of frequencies and a value that is relatively large for other frequencies.

Fundamental Filter Equations

Practical filters of the ladder type consist of symmetrical T or π sections composed of reactive elements. When the impedance arms are designated as in Fig. 35, then the image transfer constant θ and the image impedances Z_T and Z_π for the T and π sections are

$$\cosh \theta = 1 + \frac{Z_1}{2Z_2} \tag{50a}$$

or

$$\sinh \frac{\theta}{2} = \sqrt{\frac{Z_1}{4Z_2}} \tag{50b}$$

$$Z_T = \sqrt{Z_1 Z_2 + \tfrac{1}{4}Z_1^2} \tag{51}$$

$$Z_\pi = \frac{Z_1 Z_2}{\sqrt{Z_1 Z_2 + \tfrac{1}{4}Z_1^2}} = \frac{Z_1 Z_2}{Z_T}. \tag{52}$$

Half sections have an image transfer constant exactly half of the transfer constant of a full section. The imag

* Decimal classification: R142×R390. Original manuscript received by the Institute, February 17, 1943. Prepublished by permission from "Radio Engineers Handbook," by Frederick E. Terman and the McGraw-Hill Book Company, New York, N. Y.

† Director, Radio Research Laboratory, Harvard University, Cambridge, Massachusetts.

[22] Otto J. Zobel, "Theory and design of uniform and composite electric wave-filters," *Bell. Sys. Tech. Jour.*, vol. 2, p. 1; January 1923.

impedances of the two sides of the half sections differ, being Z_T on one side and Z_π on the other (see Fig. 35).

An ideal filter in which the impedance arms are pure reactances with zero loss has zero attenuation (i.e., the real part of θ is 0) for all frequencies that make $Z_1/4Z_2$ lie between 0 and -1. Such frequencies are termed *pass frequencies* and the range in which they lie is termed the *pass band*. The phase constant β of the image transfer constant in the pass band is

$$\cos \beta = 1 + \frac{Z_1}{2Z_2}. \tag{53}$$

The image impedance in the pass band is a pure resistance.

All frequencies other than those which make $Z_1/4Z_2$ lie between 0 and -1 suffer attenuation (i.e., the real part α of θ is not zero). Such frequencies are termed *stop frequencies*, and are said to lie in the *stop band* of the filter. The phase shift in the stop bands is either

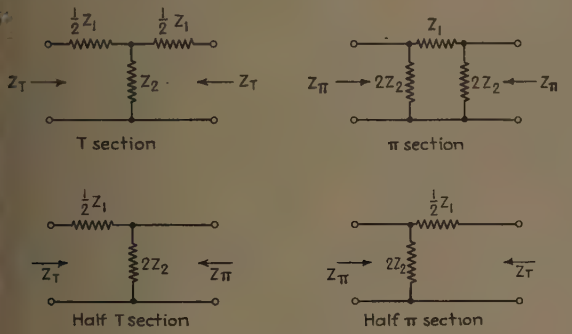

Fig. 35—Filter sections, showing nomenclature.

zero or ± 180 degrees, and the image impedance is a pure reactance. The magnitude of the attenuation constant α for the stop frequencies is

$$\cosh \alpha = \left| 1 + \frac{Z_1}{2Z_2} \right|. \tag{54}$$

Filter Designs

Practical ladder filters are built up in the manner illustrated in Fig. 36. The middle portion of the filter is composed of a series of symmetrical T or π sections connected in cascade, and at each end of the filter there is a half section as shown. All sections in the filter are matched together at each junction on an image-impedance basis.

The intermediate sections used in constructing a practical filter are of a class in which one can vary the attenuation characteristics of the section by suitably designing the series and shunt arms, without at the same time affecting in any way the image impedance. This makes it possible to arrange matters so that the frequencies for which one section gives only small attenuation are then strongly attenuated by some other section. Sections of this class, however, have an image impedance that is far from constant in the pass band of the filter. This means that a filter consisting only of such sections as might be used in the intermediate portion of a filter would not operate satisfactorily in association with a load resistance having a value independent of frequency. This difficulty is overcome by employing suitably designed terminal half sections, as shown in Fig. 36, that match the intermediate portion

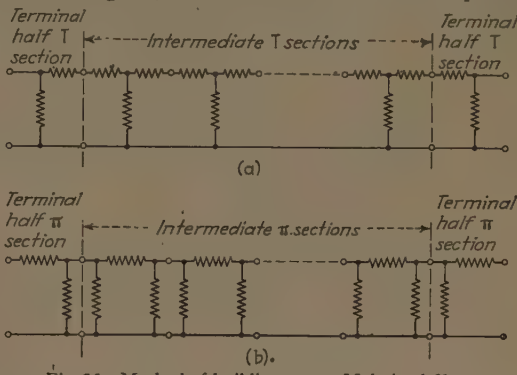

Fig. 36—Method of building up an M-derived filter.

of the filter on an image-impedance basis on one side, but offer a more desirable type of image impedance at their external terminals.

Sections suitable for use in low-pass, high-pass, and band-pass filters, together with the necessary design formulas, are given in Tables I, II, and III. All the sections illustrated in these tables are suitable for use in the intermediate portion of the filter except those sections specifically designated as end sections. All intermediate sections designed from one of these tables for given cutoff frequencies, and for the same load resistance, will have identical image-impedance characteristics, and so can be connected in cascades on an image-impedance basis. The image transfer constant, i.e., the attenuation and phase-shift characteristics, of the individual sections will, however, depend upon the type of section involved and upon the value assigned to the design parameter m (or m_1 and m_2).

The terminal half sections are designed according to the formulas given in the respective tables, with the design parameter m assigned a value of approximately 0.6. When the terminal half sections are designed by the tables for the same cutoff frequencies and same load resistance as the intermediate sections, their image impedances will match the intermediate sections at one pair of terminals. Also, when the appropriate value of m is used in the design, the image impedance at the other terminals will be substantially constant over almost the entire pass band of the filter. This is illustrated in Fig. 37, where the effect of using various values of m is shown. Examples of actual filters designed according to Tables I, II, and III are given in Figs. 38, 39, and 40.

The procedure involved in the design of a filter to meet a given set of conditions falls into several well-defined steps, as follows:

TABLE I

DESIGN OF LOW-PASS SECTIONS

Fundamental Relations

R = load resistance

f_1 = cutoff frequency (highest frequency transmitted)

f_∞ = a frequency of very high attenuation

$$L_k = \frac{R}{\pi f_2} \qquad C_k = \frac{1}{\pi f_1 R} \qquad m = \sqrt{1 - \left(\frac{f_1}{f_\infty}\right)^2}$$

Design of Sections

Type	Attenuation characteristic	A. Filters having T intermediate sections		B. Filters having π intermediate sections	
		Configuration	Formulas	Configuration	Formulas
End (m of approximately 0.6)			$L_1 = mL_k$ $L_2 = \frac{1 - m^2}{4m} L_k$ $C_2 = mC_k$		$L_1 = mL_k$ $C_1 = \frac{1 - m^2}{4m} C_k$ $C_2 = mC_k$
I			$L_1 = mL_k$ $L_2 = \frac{1 - m^2}{4m} L_k$ $C_2 = mC_k$		$L_1 = mL_k$ $C_1 = \frac{1 - m^2}{4m} C_k$ $C_2 = mC_k$
II ($f_\infty = \infty$)			$L_1 = L_k$ $C_2 = C_k$		$L_1 = L_k$ $C_2 = C_k$

1. Determine the cutoff frequencies, i.e., the frequencies that mark the edge of the pass band, and the load resistance that will meet the design requirements, and decide whether T or π intermediate sections are to be used.

2. Design the terminating sections according to the proper table, using the load resistance and cutoff frequencies selected in step 1.

3. Decide on the number of intermediate sections to be used. The more sections selected the greater will be the attenuation that can be obtained in the stop band. One intermediate section will give a moderately good filter, and will be sufficient for many requirements. More than two intermediate sections are seldom required.

4. Select the frequencies at which the different intermediate sections will have their maximum attenuation and then design these sections for the chosen load resistance and cutoff frequencies, using formulas in the appropriate tables.

The choice between T and π sections for the middle portion of the filter is primarily based upon considerations of convenience. Electrically, the performance of the two types will be identical.

The location of the frequencies for which the intermediate sections have high attenuation must be

TABLE II

DESIGN OF HIGH-PASS SECTIONS

Fundamental Relations

R = load resistance

f_1 = cutoff frequency (lowest frequency transmitted)

f_∞ = a frequency of very high attenuation

$$L_k = \frac{R}{4\pi f_1} \qquad C_k = \frac{1}{4\pi f_1 R} \qquad m = \sqrt{1 - \left(\frac{f_\infty}{f_1}\right)^2}$$

Design of Sections

Type	Attenuation characteristic	A. Filters having T intermediate sections		B. Filters having π intermediate sections	
		Configuration	Formulas	Configuration	Formulas
End (m of approximately 0.6)			$C_1 = \frac{C_k}{m}$ $C_2 = \frac{4m}{1 - m^2} C_k$ $L_2 = \frac{L_k}{m}$		$L_1 = \frac{4m}{1 - m^2} L_k$ $C_1 = \frac{C_k}{m}$ $L_2 = \frac{L_k}{m}$
I			$C_1 = \frac{C_k}{m}$ $C_2 = \frac{4m}{1 - m^2} C_k$ $L_2 = \frac{L_k}{m}$		$L_1 = \frac{4m}{1 - m^2} L_k$ $C_1 = \frac{C_k}{m}$ $L_2 = \frac{L_k}{m}$
II $f_\infty = 0$			$C_1 = C_k$ $L_2 = L_k$		$C_1 = C_k$ $L_2 = L_k$

TABLE III

Design of Band-Pass Sections

Fundamental Relations

R = load resistance f_1 = lower frequency limit of pass band f_2 = higher frequency limit of pass band
$f_{1\infty}$ = a frequency of very high attenuation in low-frequency attenuating band $f_{2\infty}$ = a frequency of very high attenuation in high-frequency attenuating band

$$L_{1k} = \frac{R}{\pi(f_2 - f_1)} \qquad L_{2k} = \frac{(f_2 - f_1)R}{4\pi f_1 f_2} \qquad C_{1k} = \frac{f_2 - f_1}{4\pi f_1 f_2 R} \qquad C_{2k} = \frac{1}{\pi(f_2 - f_1)R}$$

Design of Sections

Type	Attenuation characteristic	A. Filters having T intermediate sections: Configuration	A. Filters having T intermediate sections: Formulas	B. Filters having π intermediate sections: Configuration	B. Filters having π intermediate sections: Formulas	Notation for both T and π sections
End ($m_1 = m_2$ = approximately 0.6)			$L_1 = m_1 L_{1k}$ $L_2 = aL_{1k}$ $L_2' = cL_{1k}$ $C_1 = \frac{C_{1k}}{m_2}$ $C_2 = \frac{C_{1k}}{b}$ $C_2' = \frac{C_{1k}}{d}$		$L_1 = \frac{L_{1k}}{b}$ $L_1' = \frac{L_{1k}}{d}$ $L_2 = \frac{L_{2k}}{m_2}$ $C_1 = aC_{2k}$ $C_1' = cC_{2k}$ $C_2 = m_1 C_{2k}$	$g = \sqrt{\left(1 - \frac{f_{1\infty}^2}{f_1^2}\right)\left(1 - \frac{f_{1\infty}^2}{f_2^2}\right)}$ $h = \sqrt{\left(1 - \frac{f_1^2}{f_{2\infty}^2}\right)\left(1 - \frac{f_2^2}{f_{2\infty}^2}\right)}$ $m_1 = \frac{\frac{f_1 f_2}{f_{2\infty}^2}g + h}{1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}}$ $m_2 = \frac{g + \frac{f_{1\infty}^2}{f_1 f_2}h}{1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}}$ $a = \frac{(1-m_1^2)f_1 f_2}{4gf_{1\infty}^2}\left(1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}\right) = \frac{(1-m_2^2)f_1 f_2}{4gf_{1\infty}^2}\left(1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}\right)$ $b = \frac{(1-m_2^2)}{4g}\left(1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}\right)$ $c = \frac{(1-m_1^2)}{4h}\left(1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}\right)$ $d = \frac{(1-m_1^2)f_2^2}{4hf_1 f_2}\left(1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}\right) = \frac{(1-m_2^2)f_1 f_2}{4hf_{1\infty}^2}\left(1 - \frac{f_{1\infty}^2}{f_{2\infty}^2}\right)$ when $(m_1 = m_2)$, $g = h$, $a = d$, $b = c$, $f_{1\infty} = \frac{f_1 f_2}{f_{2\infty}}$, $m_1 = m_2 = \frac{h}{1 - \frac{f_1 f_2}{f_{2\infty}^2}}$ and $f_{2\infty}^2 = \frac{f_1^2 + f_2^2 - 2m^2 f_1 f_2}{2(1-m^2)} + \left[\left(\frac{f_1^2 + f_2^2 - 2m^2 f_1 f_2}{2(1-m^2)}\right)^2 - f_1^2 f_2^2\right]^{1/2}$ (These formulas apply for both end and Type I sections)
I			$L_1 = m_1 L_{1k}$ $L_2 = aL_{1k}$ $L_2' = cL_{1k}$ $C_1 = \frac{C_{1k}}{m_2}$ $C_2 = \frac{C_{1k}}{b}$ $C_2' = \frac{C_{1k}}{d}$		$L_1 = \frac{L_{1k}}{b}$ $L_1' = \frac{L_{1k}}{d}$ $L_2 = \frac{L_{2k}}{m_2}$ $C_1 = aC_{2k}$ $C_1' = cC_{2k}$ $C_2 = m_1 C_{2k}$	
II $f_{1\infty} = 0$ $f_{2\infty} = f_2$			$L_1 = \frac{f_1 R}{\pi f_2(f_2 - f_1)}$ $L_2 = \frac{(f_1 + f_2)R}{4\pi f_1 f_2}$ $C_1 = C_{1k}$		$C_1 = \frac{f_1 + f_2}{4\pi f_1 f_2 R}$ $C_2 = \frac{f_1}{\pi f_2(f_2 - f_1)R}$ $L_2 = L_{2k}$	
III $f_{1\infty} = f_1$ $f_{2\infty} = \infty$			$L_1 = L_{1k}$ $C_2' = \frac{1}{\pi(f_1 + f_2)R}$ $C_1 = \frac{f_2 - f_1}{4\pi f_1^2 R}$		$L_1' = \frac{R}{\pi(f_1 + f_2)}$ $L_2 = \frac{(f_2 - f_1)R}{4\pi f_1^2}$ $C_2 = C_{2k}$	
IV $f_{1\infty} = 0$ $f_{2\infty} = \infty$			$L_1 = L_{1k}$ $L_2 = L_{2k}$ $C_1 = C_{1k}$ $C_2 = C_{2k}$		$L_1 = L_{1k}$ $L_2 = L_{2k}$ $C_1 = C_{1k}$ $C_2 = C_{2k}$	
V $f_{2\infty} = f_2$			$L_1 = m_1 L_{1k}$ $L_2 = \frac{(1 - m_1^2)}{4m_1} L_{1k}$ $C_1 = \frac{C_{1k}}{m_2}$ $C_2 = \frac{4m_2}{1 - m_2^2} C_{1k}$ See notation for m_1 and m_2		$L_1 = \frac{4m_2}{1 - m_2^2} L_{2k}$ $L_2 = \frac{L_{2k}}{m_2}$ $C_1 = \frac{(1 - m_2^2)}{4m_1} C_{2k}$ $C_2 = m_1 C_{2k}$ See notation for m_1 and m_2	$m_1 = \frac{f_1}{f_2} m_2 \qquad m_2 = \sqrt{\frac{1 - \frac{f_{1\infty}^2}{f_1^2}}{1 - \frac{f_{1\infty}^2}{f_2^2}}}$
VI $f_{1\infty} = f_1$		Same circuit as above for Type V	Same formulas as above for Type V. See notation for m_1 and m_2	Same circuit as above for Type V	Same formulas as above for Type V See notation for m_1 and m_2	$m_1 = \sqrt{\frac{1 - \frac{f_2^2}{f_{2\infty}^2}}{1 - \frac{f_1^2}{f_{2\infty}^2}}} \qquad m_2 = \frac{f_1}{f_2} m_1$
VII $f_{1\infty} = 0$			$L_1 = m_1 L_{1k}$ $L_2 = aL_{1k}$ $L_2' = \frac{(1 - m_1^2)}{4h} L_{1k}$ $C_1 = C_{1k}$ $C_2' = \frac{h}{a} C_{1k}$		$L_1' = \frac{h}{g} L_{2k}$ $L_2 = L_{2k}$ $C_1 = aC_{2k}$ $C_2 = m_1 C_{2k}$ $C_1' = \frac{(1 - m_1^2)}{4h} C_{2k}$	$h = \sqrt{\left(1 - \frac{f_1^2}{f_{2\infty}^2}\right)\left(1 - \frac{f_2^2}{f_{2\infty}^2}\right)} \qquad m_1 = \frac{f_1 f_2}{f_{2\infty}^2}g + h \qquad a = \frac{(1 - m_1^2)f_{2\infty}^2}{4f_1 f_2}$
VIII $f_{2\infty} = \infty$			$L_1 = L_{1k}$ $L_2 = \frac{d}{g} L_{1k}$ $C_1 = \frac{C_{1k}}{m_2}$ $C_2 = \frac{4g}{1 - m_2^2} C_{1k}$ $C_2' = \frac{C_{1k}}{d}$		$L_1 = \frac{4g}{1 - m_2^2} L_{2k}$ $L_2 = \frac{L_{2k}}{m_2}$ $L_1' = \frac{L_{2k}}{d}$ $C_1 = \frac{d}{g} C_{2k}$ $C_2 = C_{2k}$	$g = \sqrt{\left(1 - \frac{f_{1\infty}^2}{f_1^2}\right)\left(1 - \frac{f_{1\infty}^2}{f_2^2}\right)} \qquad m_2 = g + \frac{f_{1\infty}^2}{f_1 f_2}h \qquad d = \frac{(1 - m_2^2)f_1 f_2}{4f_{1\infty}^2}$

carefully selected, for upon this choice rest the attenuating properties of the filter. These frequencies of high attenuation should in general be different for the different sections, and should be so staggered throughout the attenuating bands that every frequency suffers considerable attenuation by at least one section. Inasmuch as the terminal half sections determine one frequency of high attenuation in each attenuating band, these sections should be designed before the intermediate sections in order that the attenuation of the central portion of the filter may best supplement that of the end sections.

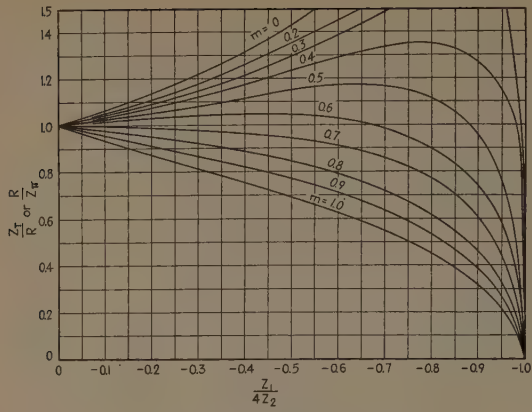

Fig. 37—Effect of design parameter m on image-impedance characteristics in the pass band.

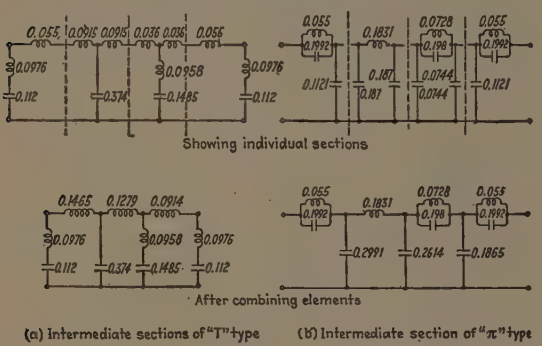
Showing individual sections
After combining elements
(a) Intermediate sections of "T" type
(b) Intermediate section of "π" type

Fig. 38—Example of a low-pass filter having a cutoff frequency of 1213 cycles, two intermediate sections, and proportioned to operate with a load resistance of 700 ohms.

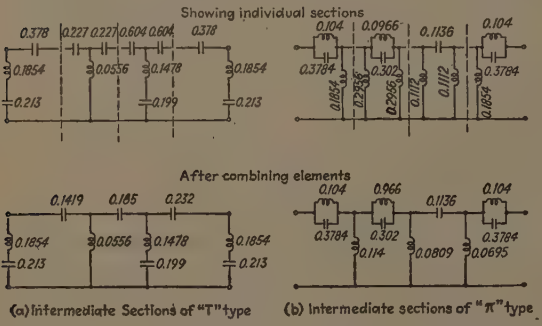
Showing individual sections
After combining elements
(a) Intermediate Sections of "T" type
(b) Intermediate sections of "π" type

Fig. 39—Example of a high-pass filter having a cutoff frequency of 1000 cycles, two intermediate sections, and proportioned to operate with a load resistance of 700 ohms.

It is sometimes desirable to obtain a very rapid rise of attenuation at the edge of the pass band of the filter. Although it is theoretically possible in the ideal case of perfect reactances to obtain a frequency of high attenuation as close to the cutoff frequency as desired, practical considerations require that such frequencies of high attenuation be not too close to the cutoff frequencies. There are two reasons for this. In the first place, as the frequency of high attenuation is moved closer and closer to the cutoff frequency, the attenuating characteristics become narrower, as shown in Fig. 41. The result is that a section designed to attenuate frequencies extremely close to cutoff will be of little use in attenuating frequencies appreciably different from cutoff. In the second place, the reactance arms required in a filter having a frequency of high attenuation very close to cutoff assume impractical proportions, and if these impractical circuit elements are built, it will be found that their losses prevent the high attenuation that is theoretically possible from being actually realized. This is illustrated in Fig. 41. In the case of ordinary coils with reasonably high Q, the frequencies of infinite attenuation should differ from cutoff by not less than 2 to 5 per cent. Where quartz crystals are used as filter elements, the higher Q of such resonators permits this difference to be reduced greatly.

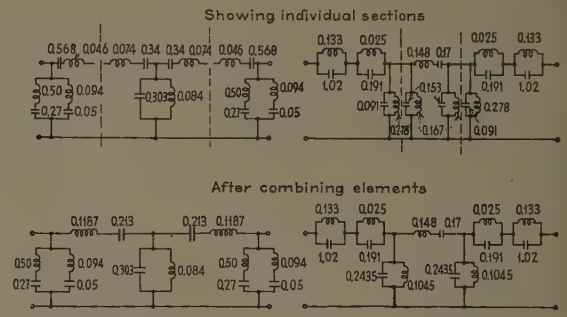

Fig. 40—Examples of band-pass filters having cutoff frequencies of 500 and 2000 cycles, one intermediate section, and proportioned to operate with a load resistance of 700 ohms, for designs based on T intermediate sections and on π intermediate sections.



Fig. 41—Attenuation characteristics obtained in a low-pass filter section as the frequency of high attenuation is placed closer and closer to cutoff.

Filters with MM' and Fractional Terminations, Filters in Series and Parallel

Filters such as are described above, employing terminating half sections designed for $m \cong 0.6$, provide an image-impedance characteristic for the external terminals of the filter that is sufficiently constant over the pass band to meet most requirements. Where a closer approximation to a constant resistance image impedance is required, more elaborate terminating sections can be employed. The next steps in complexity beyond the simple sections already discussed, are given

in Fig. 42 and are termed MM' terminations.[23] These arrangements give a decided improvement in image impedance at the external terminals. Thus, in the case of a low-pass filter, the usual $m = 0.6$ termination gives an image impedance constant to within 4 per cent over 90 per cent of the pass band, and the MM' termination gives an image impedance constant to within 2 per cent over 96 per cent of the pass band.

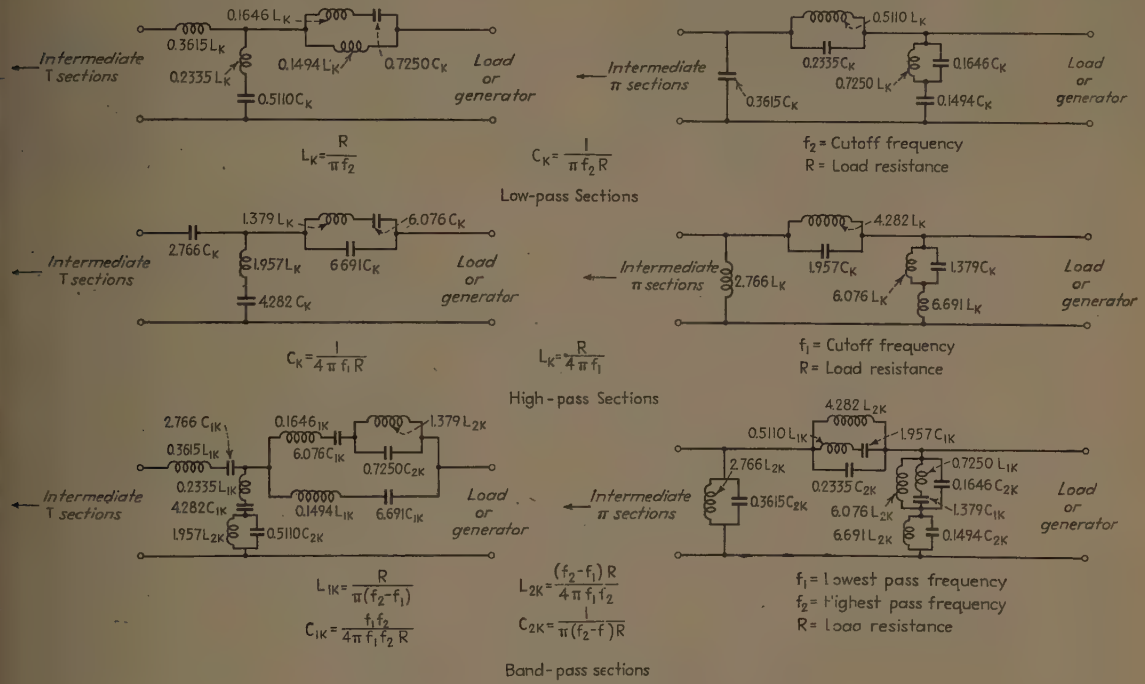

Fig. 42—Termination sections of MM' type.

The MM' terminating section is characterized by having two frequencies of infinite attenuation in each stop band, as shown in Fig. 43.

It is sometimes necessary to parallel the input or the output terminals of a number of filters. In such an arrangement, each filter shunts its own image impedance across the common terminals. If one then considers the situation at a particular frequency, it is apparent that the filters that have a pass band for this frequency offer a resistance impedance, whereas the remaining filters, i.e., those for which this frequency is in the stop band, provide a reactive shunting impedance that varies with frequency. This modifies the impedance presented by the combination of filters in parallel, and affects the insertion loss in an unfavorable manner.

This difficulty can be handled practically by employing filters in which the external terminals are shunted by a reactive arm, i.e., by using a filter having T intermediate sections. The shunting reactances of all the filters in parallel then can be thought of as forming a single shunting reactance, which can then be modified as required to make the equivalent impedance seen when one is looking toward the paralleled terminals approximate a resistance in the pass band of all filters. This requires, in some instances, merely that the magnitude of the combined shunting impedance be modified in size; in other cases, an additional shunting reactive network must be placed across the common terminals.[24,25]



Fig. 43—Attenuation characteristic of MM' terminating section.

A particularly important case of filters in parallel is furnished by complementary filters, i.e., where those frequencies that lie in the stop band of one filter are the pass frequencies of the other filter. In such an arrangement, it is found that if the terminating half

[23] Otto J. Zobel, "Extensions to the theory and design of electric wave-filters," *Bell Sys. Tech. Jour.*, vol. 10, p. 284; April, 1931.

[24] Further discussion is given by E. A. Guillemin, "Communication Networks," vol. 1, John Wiley and Sons, New York, N. Y., 1931, pp. 356–366.

[25] O. Zobel, U.S. Patents Nos. 1,557,229 and 1,557,230.

sections are originally both designed on the basis $m=0.6$ and the same load resistance, then the reactive input impedance of one filter in its stop band is almost exactly equal to the reactive impedance that should be provided by the first shunting impedance of the complementary filter in its pass band, and vice versa. The result is that, if the shunting impedances at the inputs of both filters are simply omitted, then the normal impedance relations will be maintained at all frequencies. Such an arrangement is termed a *fractional* or *x termination*, and is illustrated in Fig. 44(a).

Filters that are connected in series at one side, such as the input, present a problem analogous to that of filters in parallel. Here each filter in its stop band places a reactance in series with the other filter or filters. The proper method of attack here consists in employing filters that have reactances in series with the external terminals, i.e., filters with π intermediate sections. These series reactances are then lumped together to form a single series impedance, which is then modified as required to take into account the reactances contributed by the filters in the stop bands. In the case of complementary filters in series, one designs the terminating half sections for $m=0.6$. The series elements of the sections are then omitted, as shown in Fig. 44(b). and the input reactance of the filter in the stop band is used to supply the series reactance required by the complementary filter in its pass band, and vice versa.

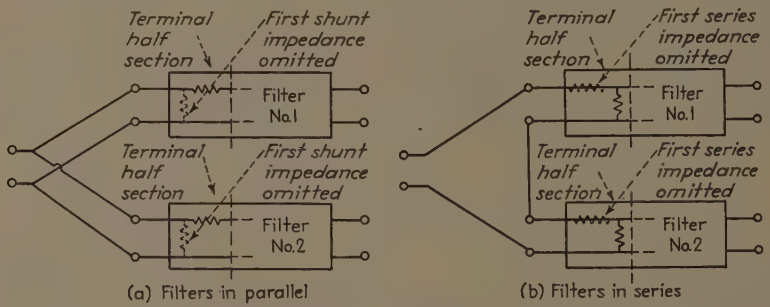

Fig. 44—Schematic illustration of complementary filters in parallel and series (x terminations).

Losses

The ideal filter with pure reactive elements discussed above can never be fully realized in practice, for although condensers can be made with negligible losses, this is never true with inductances. Experience shows, however, that when the Q of the coils is of the order of 15 or higher, the effect of the losses is only secondary and the essential conclusions and design procedures based on an ideal filter with zero losses are not seriously invalidated.

The principal effects of a moderate amount of energy loss in a filter are:

1. A small attenuation is introduced in the pass band.
2. Frequencies for which infinite attenuation would otherwise be obtained are found to have only finite attenuation.[26]
3. The abrupt transitions occurring at the cutoff frequencies in an ideal filter are rounded off by the losses.

XII. Lattice Filters[27,28]

Fundamental Relations

A lattice will act as a filter when the impedance arms are suitably designed reactances. The lattice structure provides the most general type of symmetrical filter section that can be devised, and includes T and π sections (including m-derived types) as special cases.

The image impedance Z_I and image transfer constant θ of a lattice are

$$Z_I = \sqrt{Z_a Z_b} \tag{55}$$

$$\tanh\left(\frac{\theta}{2}\right) = \sqrt{\frac{Z_a}{Z_b}}. \tag{56}$$

Here Z_a and Z_b are the lattice impedances, as shown in Fig. 14, which appeared in Part I. Since the image impedance of a lattice depends upon the product of the two lattice impedances, whereas the image transfer constant depends upon the quotient of these impedances, *it is possible to specify the image impedance and the image transfer constant of a lattice filter independently of each other.*

A pass band is obtained in a lattice network whenever the two reactances Z_a and Z_b have opposite signs. Under these conditions the attenuation constant α is zero, the image impedance is a resistance, and the phase shift β is

[26] It is, however, possible in many cases to obtain infinite attenuation by addition of a resistance to the network in such a manner as to cancel out the residual transmission at this particular frequency. See Vernon D. Landon, "M-derived band-pass filters with resistance cancellation," *RCA Rev.*, vol. 1, pp. 93–102; October, 1936.

[27] H. W. Bode, "A general theory of electric wave filters," *Jour. Math. and Phys.*, vol. 13, p. 275; November, 1934; Monograph B-843, Bell Telephone System.

[28] H. W. Bode and R. L. Dietzold, "Ideal wave filters," *Bell Sys. Tech. Jour.*, vol. 14, p. 215; April, 1935.

$$\tan\frac{\beta}{2} = -j\sqrt{\frac{Z_a}{Z_b}}. \tag{57}$$

The lattice filter has a stop band whenever the two reactances Z_a and Z_b have the same sign. Under these conditions, the image impedance is a pure reactance, the phase shift is either zero or π radians, and the attenuation constant α is

For $Z_b > Z_a$ ($\beta = 0$):

$$\tanh\left(\frac{\alpha}{2}\right) = \sqrt{\frac{Z_a}{Z_b}}$$

For $Z_b < Z_a$ ($\beta = \pi$): (58)

$$\tanh\left(\frac{\alpha}{2}\right) = \sqrt{\frac{Z_b}{Z_a}}.$$

The pass bands, cutoff frequencies, and stop bands of a lattice filter can be given the desired locations by properly arranging the zeros and poles of the lattice impedances Z_a and Z_b. The zeros and poles possessed by the impedance Z_a that lie within the pass band must coincide with poles and zeros, respectively, of impedance Z_b. At each cutoff frequency, one of the lattice impedances must contain either a pole or a zero that is not matched by a corresponding critical frequency in the other impedance. In the stop or attenuating band, zeros and poles of one of the lattice impedances must coincide, respectively, with the zeros and poles of the other lattice impedance. When these requirements are met, the impedances Z_a and Z_b will be of opposite sign throughout the pass band, but will have the same sign in the desired stop band. Arrangements of poles and zeros for several typical cases are shown in Fig. 45.

It is apparent that there is a great variety of possibilities for any particular type of filter. Thus the number of critical frequencies in the pass and stop bands may be varied, as well as the position of these critical frequencies in relationship to cutoff. Likewise, the cutoff frequencies may be delineated by zeros or poles in impedance Z_a or by corresponding critical frequencies in Z_b.

Formulas for the image impedance and image transfer constant of a lattice filter can be readily derived in any particular case by substituting for the lattice impedances Z_a and Z_b that appear in (55) and (56) the corresponding expressions for these impedances in terms of zeros and poles given by (7a) and (7b). When such expressions are derived, it will be found that the image impedance will depend *only upon the number and location of the critical frequencies that are present in the stop band of the filter* and upon the cutoff frequencies, while the image transfer constant, i.e., the phase shift in the pass band and the attenuation in the stop band, will depend *only upon the number and location of the critical frequencies that appear in the lattice impedances in the pass band* and upon the cutoff frequencies.

The procedure for setting up formulas for image transfer constant and image impedance in a particular

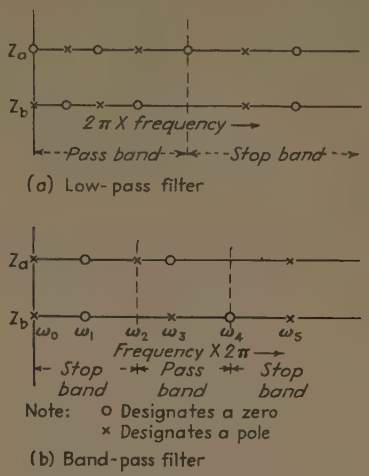

Fig. 45—Examples of arrangements of zeros and poles in lattice filters.

case can be illustrated by considering Fig. 45(b). Impedances of the lattice, by (7a) and (7b), are

$$Z_a = -j\frac{H_a}{\omega}\frac{(\omega^2-\omega_1^2)(\omega^2-\omega_3^2)}{(\omega^2-\omega_2^2)(\omega^2-\omega_5^2)} \tag{59}$$

$$Z_b = -j\frac{H_b}{\omega}\frac{(\omega^2-\omega_1^2)(\omega^2-\omega_4^2)}{(\omega^2-\omega_3^2)(\omega^2-\omega_5^2)}. \tag{60}$$

Substituting these values for Z_a and Z_b into (55) and (56) gives

$$Z_I = -\sqrt{H_aH_b}\frac{(\omega^2-\omega_1^2)}{\omega(\omega^2-\omega_5^2)}\sqrt{-\frac{(\omega^2-\omega_4^2)}{(\omega^2-\omega_2^2)}} \tag{61}$$

$$\tanh\frac{\theta}{2} = \sqrt{\frac{H_a}{H_b}}(\omega^2-\omega_3^2)\frac{1}{\sqrt{(\omega^2-\omega_2^2)(\omega^2-\omega_4^2)}}.$$

In these equations, H_a and H_b represent the values of the constant H in (7) for the impedances Z_a and Z_b, respectively.

If the lattice impedances Z_a and Z_b are interchanged, the only effect upon the behavior of the lattice network is to reverse the polarity of the output voltage, i.e., to introduce a phase shift of π radians. If *either* one of the lattice impedances (but not both) is replaced by its reciprocal impedance with respect to a constant value R, the effect is to interchange the pass and stop bands, i.e., the new filter is complementary to the original filter.

Design of Lattice Filters

The transmission characteristics of a lattice filter, which are the phase shift in the pass band and the attenuation in the stop band, are determined by the number and location of the critical frequencies within the pass band and by the ratio H_a/H_b. By employing

a sufficient number of critical frequencies and properly disposing them within the pass band, it is possible to realize almost any desired phase and attenuation characteristics. Similarly, the design factors controlling the image impedance of the filter are the critical frequencies of the lattice impedances that lie in the stop band and the value of the product $\sqrt{H_a H_b}$. As before, by employing a sufficient number of such critical frequencies and properly distributing them, it is possible to realize almost any desired image-impedance characteristic.

An ideal filter would have constant image impedance

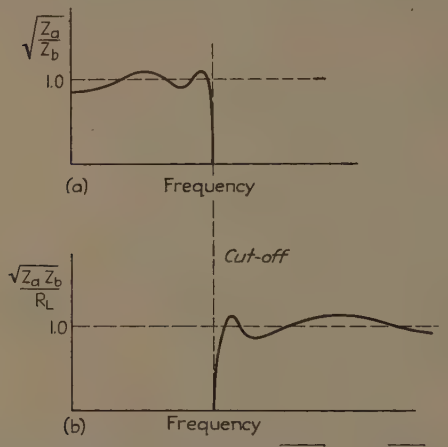

Fig. 46—Variation of design factors $\sqrt{Z_a/Z_b}$ and $\sqrt{Z_a Z_b}/R_L$ corresponding to optimum attenuation and optimum characteristic-impedance characteristics.

throughout the pass band, a phase shift proportional to frequency within the pass band, and a very high attenuation in the stop band. It is, accordingly, customary to distribute the critical frequencies within the stop band in such a manner as to maintain the image impedance as nearly constant as possible over most of the pass band. In distributing the critical frequencies within the pass band, one may either give maximum weight to linearity of the phase characteristic or place the greatest emphasis upon obtaining the highest possible attenuation within the stop band. Designs that give the most linear phase-shift characteristics with a given number of critical frequencies within the pass band do not have such desirable attenuation characteristics as can be obtained with the same number of critical frequencies and some sacrifice in linearity of the phase curve.

The attenuation of a lattice filter will be infinite whenever $\sqrt{Z_a/Z_b}=1$, and will be smaller the farther the departure of $\sqrt{Z_a/Z_b}$ from unity. Accordingly, the attenuation characteristics for a given number of critical frequencies will approach most closely the ideal when the critical frequencies within the pass band are so distributed that the value of $\sqrt{Z_a/Z_b}$ oscillates with equal amplitudes above and below the value unity, as shown in Fig. 46(a). A systematic procedure for selecting critical frequencies to accomplish this result has been developed by Cauer and is described in some detail by Guillemin.[29] When the design parameters are selected in the Cauer manner to provide the best attenuation characteristic, the phase characteristic is far from linear.

The image impedance of a lattice filter will be constant to the extent that the quantity $\sqrt{Z_a Z_b}/R_L$ approximates unity, where R_L is the load resistance. This ideal is most closely realized for a given number of critical frequencies when $\sqrt{Z_a Z_b}/R_L$ oscillates about the value unity with equal positive and negative deviations, as shown in Fig. 46(b). The procedure for locating the critical frequencies within the stop band in order to accomplish this is similar in every respect to the procedure for locating the critical frequencies in the pass band to provide an oscillatory approximation to the ideal attenuation characteristic. The detailed steps are given by Cauer and Guillemin.

A phase-shift characteristic that is substantially linear over most of the pass band, combined with an attenuation characteristic that rises rapidly beyond cutoff, can be obtained by locating the critical frequencies within the pass band according to the manner devised by Bode,[28] and illustrated in Fig. 47. Here the



Fig. 47—Distribution of critical frequencies in a Bode-type lattice filter.

pass band is divided into two parts, region A and region B. Region A, which comprises most of the pass band, is to have a substantially linear phase-shift characteristic; region B is a transition region in which the phase shift is not linear. In region A, critical frequencies are located at a uniform frequency interval δ as shown. Region B is provided with at least one critical frequency, corresponding to cutoff, and often one or more additional critical frequencies. In order to obtain the most favorable phase characteristic in region A, these critical frequencies in the transition region B must be located in accordance with Table IV. When this is done, the phase characteristic will be almost

TABLE IV

SPACING INTERVALS*

Number of transition frequencies	δ_1/δ	δ_2/δ	δ_3/δ	δ_4/δ	δ_5/δ	δ_c/δ
1	0.500	—	—	—	—	0.500
2	0.853	0.354	—	—	—	1.207
3	0.950	0.727	0.278	—	—	1.955
4	0.981	0.880	0.630	0.231	—	2.723
5	0.992	0.946	0.810	0.555	0.197	3.501

* See Fig. 47.

[29] See pages 394–412 of footnote reference 24.

perfectly linear in region A, provided that there are not too few critical frequencies in region A. The associated attenuation characteristic is as shown in Fig. 48,



Fig. 48—Attenuation characteristics of a Bode-type lattice filter.

and rises with a rapidity that increases as more transition factors are employed in region B. The attenuation in a Bode design never goes to infinity, although it quickly becomes quite large.

Relation between Ladder and Lattice Structures

Any symmetrical T or π section can be converted to an equivalent lattice section by so selecting the lattice impedances that the open- and short-circuit impedances of the lattice are the same as for the T (or π) arrangement. The transformations necessary to accomplish this are illustrated in Fig. 49.



(a) Equivalence of lattice and T networks



(b) Equivalence of lattice and Π networks

Fig. 49—Equivalence of lattice, T, and π networks.

The reverse transformation, i.e., the representation of a lattice network by a symmetrical T (or a symmetrical π) will not necessarily lead to a physically realizable T or π. Examination of Fig. 49 shows that the conversion to a symmetrical T will result in a realizable structure only when it is possible to subtract the series arm Z_a of the lattice from the lattice diagonal and have a physically realizable remainder. Similarly, the conversion from a lattice to a symmetrical π will result in a physical network only when it is physically possible to subtract the admittance $1/Z_b$ of the diagonal lattice impedance from the admittance of the series-impedance arm and have a physically realizable remainder.

A series impedance that is common to both arms of a lattice can be removed from the lattice and placed in series with the external terminals, as shown in Fig. 50(a). The resulting combination of series impedance and modified lattice has exactly the same properties as the original lattice. Similarly, an impedance that is in shunt with both arms of a lattice may be removed from the lattice and placed in shunt across the external terminals, as shown in Fig. 50(b). The validity of these transformations is based on the fact that the open- and short-circuit impedances possessed by the modified lattice and its external series (or shunt) impedances are exactly the same as the corresponding open- and short-circuit impedances of the original lattices.

Successive applications of these transformations can be used to transform a lattice having complicated impedance arms into a ladder network of alternate series and shunt impedances in association with a simpler lattice. In some cases, the residual lattice degenerates into a pair of shunt arms in parallel, or into two series



(a) Lattice structure with developed series impedances



b) Lattice structure with developed shunt impedances

Fig. 50—Development of lattice network into lattice plus series (or shunt) impedances.

arms, in which case the conversion from the original lattice to a ladder network is complete.

A lattice that cannot be converted to a ladder network can sometimes still be transformed into a bridged-T section. This is illustrated in Fig. 51, where by considering inductances L_1 as bridging the terminals 1-3 and 2-4, the lattice reduces to arms C_1 and C_2L_2, and when $C_1 > C_2$ can be developed into a ladder network, shown in Fig. 51(d), that, when bridged by the inductance $2L_1$, is equivalent to the original lattice.

Comparison of Lattice and Ladder Filters

The lattice structure provides the most general form of symmetrical section that it is possible to realize, and so provides the greatest possible choice of characteristics that can be obtained in a filter. At the same time, the lattice generally requires more coils and condensers than does the corresponding m-derived type of filter, and does not provide an input and output terminal at

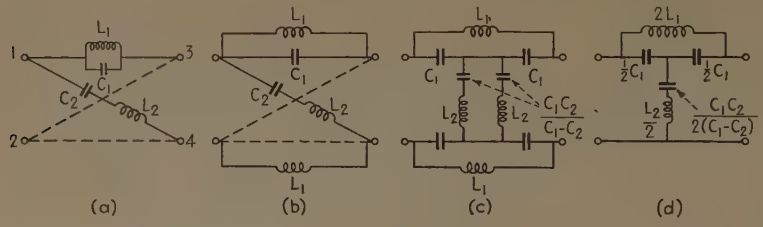

Fig. 51—Development of a latti which can be transformed into bridged-T network.

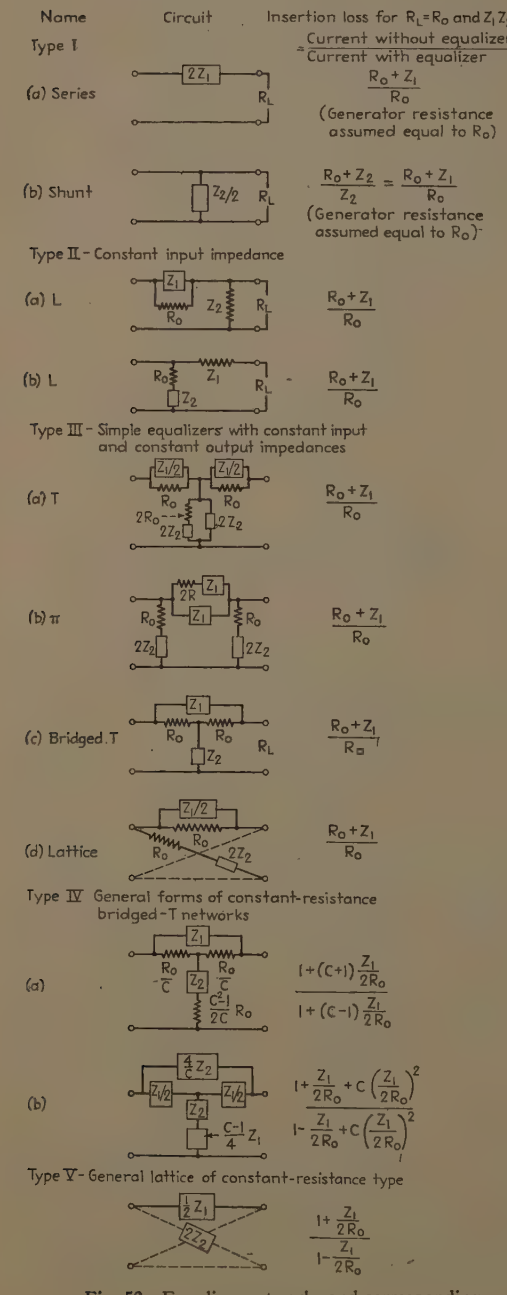

Fig. 52—Equalizer networks and corresponding insertion loss formula.

a common ground potential unless the lattice can b fully developed into a ladder or bridged-T networ It is found that for most communications purpos calling for filters, the *m*-derived structure is quite ad quate.

XIII. Equalizers

An equalizer is a network placed between the ge erator and load such that the current that the genera tor produces in the load will vary in some desire manner with frequency. An *attenuation* equalizer is a equalizer that is inserted in order to control the ma nitude of the load current as a function of frequency without any particular regard to phase relations. *phase* equalizer is an all-pass filter designed to intr duce a desired phase shift as a function of frequency i the load current.

For most purposes it is sufficient to equalize only f attenuation. If, however, circumstances require phas as well as attenuation equalization, the procedure fo lowed is first to equalize for attenuation and then afte ward to add a phase equalizer to the system to corre for any undesired features in the phase characteristi of the original system plus the attenuation equalizer.

Attenuation Equalizers[30]

The networks commonly used as attenuation equa izers are shown in Fig. 52, which also gives the inse tion loss of these networks when the load impedanc R_L has the design value $R_L=R_0$.

These networks are conveniently divided into classe as indicated. The simple series and shunt equalizin networks designated as Type I find some use becaus of their simplicity, but have the very serious disad vantage of causing the impedance seen by the genera tor in looking toward the load, and also the impedanc seen by the load in looking toward the generator, t depend upon the amount of attenuation introduced b the equalizer.

The L equalizers, designed as Type II, partiall overcome this disadvantage of the Type I equalize since when $Z_1Z_2=R_0^2=R_L^2$, i.e., by making Z_1 and Z reciprocal networks with respect to $R_0=R_L$, the in pedance on the input side of the equalizer will be constant resistance equal to R_L, irrespective of th amount of attenuation introduced. The resistance seen by the load when one looks toward the generato will, however, depend upon the attenuation.

[30] Much of the material given here is based upon "Motion Pi ture Sound Engineering," D. Van Nostrand Co., New York, N. Y 1938, chap. 16.

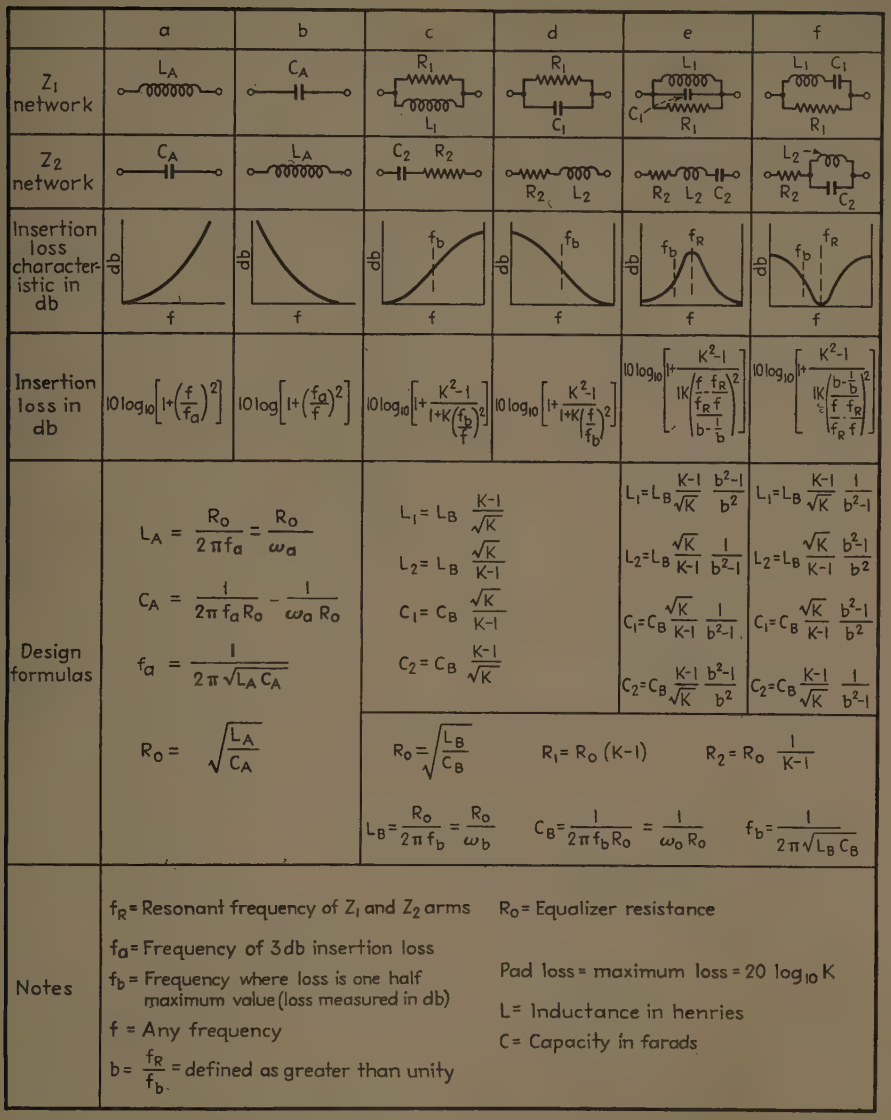
a
b
c
d
e
f
Z1 network
Z2 network
Insertion loss characteristic in db
Insertion loss in db
Design formulas
Notes
db
f
fb
fR
$L_A = \frac{R_0}{2\pi f_a} = \frac{R_0}{\omega_a}$
$C_A = \frac{1}{2\pi f_a R_0} = \frac{1}{\omega_a R_0}$
$f_a = \frac{1}{2\pi\sqrt{L_A C_A}}$
$R_0 = \sqrt{\frac{L_A}{C_A}}$
$L_1 = L_B \frac{K-1}{\sqrt{K}}$
$L_2 = L_B \frac{\sqrt{K}}{K-1}$
$C_1 = C_B \frac{\sqrt{K}}{K-1}$
$C_2 = C_B \frac{K-1}{\sqrt{K}}$
$R_0 = \sqrt{\frac{L_B}{C_B}}$
$R_1 = R_0 (K-1)$
$R_2 = R_0 \frac{1}{K-1}$
$L_B = \frac{R_0}{2\pi f_b} = \frac{R_0}{\omega_b}$
$C_B = \frac{1}{2\pi f_b R_0} = \frac{1}{\omega_0 R_0}$
$f_b = \frac{1}{2\pi\sqrt{L_B C_B}}$
f_R = Resonant frequency of Z_1 and Z_2 arms
f_a = Frequency of 3db insertion loss
f_b = Frequency where loss is one half maximum value (loss measured in db)
f = Any frequency
$b = \frac{f_R}{f_b}$ = defined as greater than unity
R_0 = Equalizer resistance
Pad loss = maximum loss = $20 \log_{10} K$
L = Inductance in henries
C = Capacity in farads

Fig. 53—Design information for fundamental equalizer types.

The Type III equalizer networks are the types most widely used in practical work. They are characterized by the fact that if the impedances Z_1 and Z_2 are reciprocal networks with respect to the resistance R_0, i.e., if $Z_1 Z_2 = R_0^2$, then the equalizer has both image impedances equal to R_0 at all frequencies. Such a network is said to be of the *constant-resistance* type. Insertion of such an equalizer in a system therefore does not disturb the impedance relations, provided that the load impedance matches the image impedance of the equalizer.

The equalizers indicated as Type IV represent more general forms of bridged-T networks of the constant-resistance type, and Type V represents a general lattice network of the constant-resistance type. The networks III(c) and III(d) are special cases of the more general Types IV(a) and V, respectively.

Design of Attenuation Equalizing Networks[31]

The most important equalizers from a practical point of view are the Type III networks of Fig. 52, with the Type II sections also finding some application. The attenuation formulas are the same for Types I, II, and III, so that the insertion loss obtained with any one type can be duplicated in the other types by using the same R_0 and Z_1 (or Z_2). The choice between types is accordingly based on convenience in

[31] An excellent set of design curves is given in chaps. 16 and 17 of footnote reference 30.

construction, cost, and the importance of maintaining the impedance relations.

The bridged-T structure designated as Type III(c) in Fig. 52 is the most widely used unbalanced structure; while if symmetry with respect to ground is required, Types III(c) and III(d) networks are best. The bridged-T is superior to the Types III(a) and III(b) sections, since it requires fewer reactive elements. Compared with the Type II L sections, the bridged-T

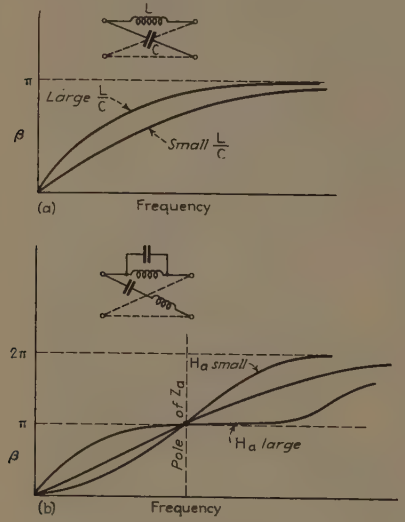

Fig. 54—Examples of phase characteristics of simple all-pass sections (phase equalizers).

requires only one additional fixed resistance, and, in return, gives a constant resistance irrespective of attenuation from both sides, instead of from only one side.

Formulas arranged in convenient form for designing equalizers having simple impedance configurations for Z_1 are given in Fig. 53 for Types I(a), II, and III sections.

The simple Type I, II, and III equalizer sections are capable of meeting most practical requirements. This is true even when relatively complicated equalization characteristics are desired, since one may break up the required attenuation characteristic into the sum of several simpler characteristics, and then obtain each simpler attenuation characteristic from a Type I, II, or III section with a relatively simple Z_1.

The general lattice network (Type V) is the most general form of symmetrical equalizer that can be devised. All other symmetrical equalizers, such as Types I(a), III, and IV, are equivalent to special cases of the peak at the parallel resonant frequency, with the magnitude of the peak determined by the shunting resistance. Such an arrangement is sometimes referred to as a "dip pad." When the impedance Z_1 is supplied by a series-resonant circuit shunted by a resistance, as in Fig. 53(f), the result is an attenuation at low and high frequencies determined by the shunting resistance, with negligible attenuation at the series-resonant frequency.

The types of attenuation characteristics obtainable with Type II and Type III sections when Z_1 has simple configurations are shown in Fig. 53. When Z_1 is supplied by an inductance, the attenuation rises at high frequencies, while if it is a capacitance, as in Fig. 53(b), the attenuation rises at low frequencies. If the inductance is shunted with a resistance, as in Fig. 53(c), the attenuation at high frequencies first rises and then levels off to a limiting value determined by the shunting resistance. Similarly, a resistance in shunt with a capacitance as in Fig. 53(d) causes a corresponding leveling off of the rise in attenuation that would otherwise occur at low frequencies. Constructing the impedance Z_1 as a parallel resonant circuit shunted by a resistance, as in Fig. 53(e), results in an attenuation general lattice. It is accordingly possible to base the design of all equalizers upon the general lattice even though the network may be built in the form of a

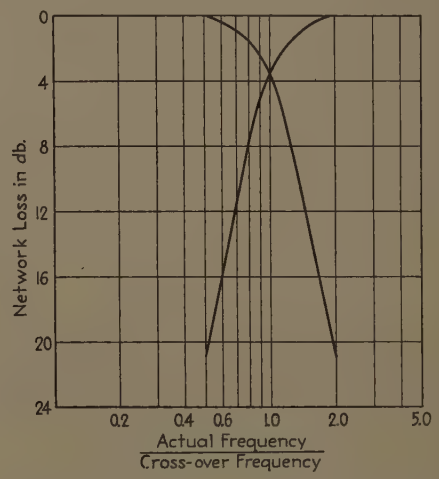

Fig. 55—Characteristics of a typical dividing network.

bridged-T where this conversion leads to a physically possible structure.[32,33]

Phase Equalizers—All-pass Filters

An all-pass filter is a filter having zero attenuation for all frequencies from zero to infinity. Such filter sections introduce phase shift without affecting attenuation, and so are employed as phase equalizers to correct phase distortion introduced by other parts of a system, and can also be used to introduce a time delay.

[32] A discussion of this approach to equalizer design, together with design information on a considerable variety of configurations for the lattice impedances, is given by Otto J. Zobel, "Distortion correction in electrical circuits with constant resistance recurrent networks," *Bell Sys. Tech. Jour.*, vol. 7, p. 438; April, 1928.

[33] A very clear discussion of the theoretical basis of the design method developed by Zobel for the general lattice equalizer is given by Everitt, footnote reference 12, in Part I, pp. 287–293.

All-pass action can be obtained by making use of a lattice network in which the lattice impedances Z_a and Z_b are reactances that are reciprocal with respect to the desired image impedance R. This leads to an image impedance that is constant at the desired value for all frequencies.

The phase shift β introduced by an all-pass section under image-impedance operation is

$$\tan\frac{\beta}{2} = \pm j\sqrt{\frac{Z_a^2}{R^2}} \qquad (62)$$

where R is the desired-image impedance.

The variation of the phase shift β with frequency can be controlled by the number and location of the internal zeros and poles in the impedance Z_a, and by the value assigned to the quantity H in the expression for Z_a given by (7). Typical phase-shift characteristics for several simple cases are illustrated in Fig. 54.

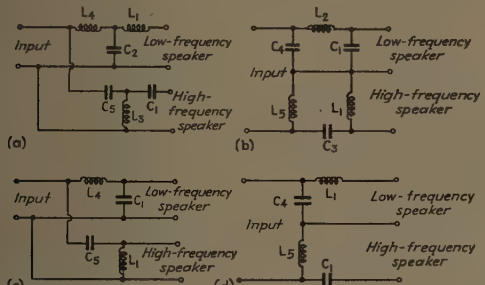

Fig. 56—Dividing networks of the filter type.

XIV. Dividing Networks[34,35]

The term *dividing network* is applied to a coupling system so arranged that at low frequencies power is delivered to a low-frequency loudspeaker, while at high frequencies it is delivered to a high-frequency speaker. The transmission characteristics of a typical dividing network are shown in Fig. 55. The frequency at which the power delivered to the two outputs is equal is termed the *crossover* frequency. Experience indicates that the dividing network should provide at least 12 decibels attenuation one octave away from the crossover frequency, as compared with the crossover attenuation, whereas attenuations of more than 18 decibels per octave are not necessary or desirable.

There are two basic types of dividing networks. The first consists of complementary low- and high-pass filters connected with inputs either in parallel or in series. Such networks are shown in Fig. 56, which also gives the necessary design formulas. The different parts are designed as complementary low- and high-pass filters with fractional terminations. The networks shown at (a) and (b) in Fig. 56 consist of one full section of the $m=1$ network type, with an input half section designed for $m\cong 0.6$. The input shunting impedance called for in the design of (a) and the series input impedance called for in the design of (b) are then omitted to provide the fractional termination. Such an arrangement provides an attenuation of approximately 18 decibels for the first octave beyond crossover. Sections shown at Fig. 56(c) and 56(d) differ from those at (a) and (b) in that the final half section of the $m=1$ network type is omitted. This reduces the attenuation to approximately 12 decibels for the first octave beyond the crossover frequency. It would be possible to design the dividing network so that the output terminals were also provided with an $m=0.6$ termination, but this is never done, because satisfactory performance can be obtained with the simpler arrangement.

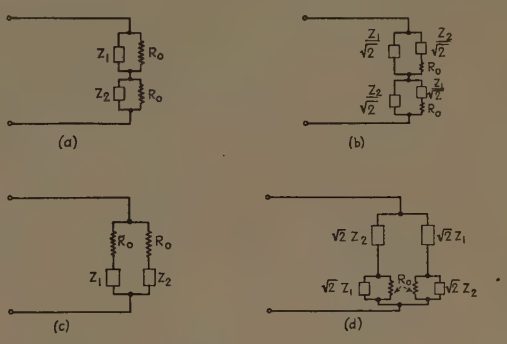

Fig. 57—Constant-resistance types of dividing network.

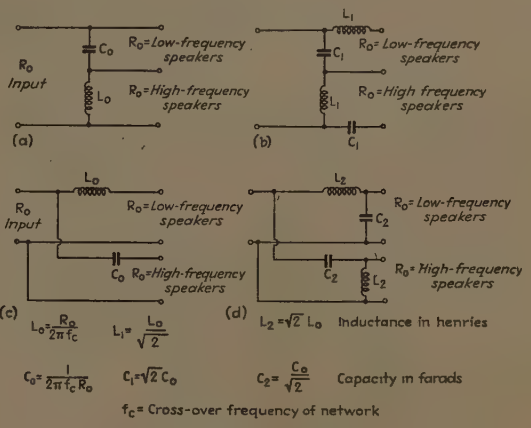

Fig. 58—Practical constant-resistance dividing networks.

Dividing networks of another kind, referred to as the *constant-resistance* type, are shown in Fig. 57. These are characterized by possessing an input impedance that

[34] See chap. 20 of footnote reference 30.

[35] John K. Hilliard, "Loud speaker dividing networks," *Electronics*, vol. 14, p. 26; January, 1941.

is a constant resistance equal to R_0 when the two impedances Z_1 and Z_2 are so related that $Z_1Z_2=R_0^2$. Practical dividing networks making use of these circuit arrangements are shown in Fig. 58, together with the necessary design formulas. The simple circuits (a) and (c) have an attenuation of approximately 6 decibels for the first octave beyond cutoff, and since this is smaller than desirable, such arrangements are seldom used. The two-element dividing networks of (b) and (d) are similar to those of Figs. 56(d) and 56(c), repectively, but because of slightly different circuit proportions provide an exactly constant input resistance, whereas the circuits of Fig. 56 only approximate a constant resistance. The attenuation provided by the networks of Figs. 57(b) and (d) is about 10 decibels for the first octave beyond cutoff.

Dividing networks carry the full output power that the amplifier operating the loudspeaker system is capable of developing, and so must be designed to have a low transmission loss. When care is taken to employ coils of the lowest practical resistance, this loss is of the order of 0.5 decibel in systems providing from 12 to 18 decibels per octave of attenuation.

Corrections

Dr. Frederick E. Terman has brought to the attention of the Editor the following corrections to Part I of his paper "Network Theory, Filters, and Equalizers" which appeared on pages 165 to 175 of the April, 1943, issue of the PROCEEDINGS.

1. Page 170, second column, first sentence under the heading "Insertion Loss": Substitute the word "network" for the word "generator."
2. Page 172, the first equation under (32) should have an equals sign between Z_{I_1} and Z_{I_2} instead of the plus sign shown.
3. Page 172, the left-hand side of the second equation under (33) should be Z_b.

Address to the Conference*

NOEL ASHBRIDGE†, FELLOW, I.R.E.

FIRST I want to say how much I appreciate the opportunity of speaking to so large a gathering of members of The Institute of Radio Engineers, on the occasion of your country-wide Winter Conference.

I wish you every success in the work you are doing, work which is well known to be a key factor in the grim struggle of our Armed Forces in all services. Never before has so much responsibility rested on the shoulders of radio engineers, but never has there been the slightest doubt that they would continue to meet this responsibility with enterprise and energy, always a move or more ahead of anything the enemy may contrive.

As a fellow member of The Institute of Radio Engineers may I say how proud I am to belong to a body of engineers whose contribution to the war effort has been great, and whose potential contribution is far greater. Before I pass on to other matters I would like to refer to a letter recently addressed to your President by the President of The Institution of Electrical Engineers in England, offering any facilities which the latter can provide to the considerable number of I.R.E. members visiting this country. The Institution of Electrical Engineers has a section dealing exclusively with radio work of all kinds, and I hope your members will find time to make contact while in this country.

I should like to tell you something of our war experiences on the technical side of the British Broadcasting Corporation. For example, the technical arrangements were planned three and a half years ago to put in operation in the event of an air raid. It so happened that the sirens got to work a matter of minutes after the declaration of war so we were soon provided with a chance at a sort of dress rehearsal. After that air-raid warnings were for a time few and far between. And we felt rather pleased with the arrangements we had made, elaborate and perhaps laborious as they were. However, when the Battle of Britain started some months later, we frequently had four or five air-raid warnings a day. And this showed us clearly enough that any elaborate technical changes to meet air-raid conditions was somewhat unworkable.

The only solution of being within seventy miles of the enemy was to be ready all the time, even though carrying on as usual between times. Of course, all this meant more and more equipment, and how to produce it quickly enough was for some time one of our great problems.

Then there was the problem of how to avoid giving navigational assistance to enemy aircraft, through the many stations we have up and down the country. We just had time to work out a plan for avoiding this in the few weeks before the war when the crisis threatened, but more than this I cannot say now.

Of course, there were several unpleasant incidents during the blitz of 1940–1941; some of those present

* Decimal classification: R060×R560. Original manuscript received by the Institute, February 4, 1943. Presented by transcription previously made by Sir Noel, Winter Conference, New York, N. Y., January 28, 1943.

† Chief Engineer, British Broadcasting Corporation, London, England.

may have heard already of one of them when broadcasting continued in one part of our building, while a bomb, one of the heavy high-explosive type, blew a considerable part of one side of the building into the street. This affair was tragic in some of its effects, but in other respects so to speak, highly successful, in that the service was maintained without a break.

It might be a mistake to say too much about the details of these happenings at the present time. However, I remember only too well another awkward instance of quite a different kind, which happened a little over ten years ago, and which I think may be of interest to radio engineers. Although I do not think it has ever been published before, it certainly is no secret. It gave me just thirty minutes of the most acute discomfort. And when you hear about it, some of those present may have a fellow feeling.

We had just celebrated the tenth anniversary of the opening of our short-wave service. It was in fact, ten years ago last December that we completed and opened for service our first short-wave broadcast station. In those days it was a fairly elaborate affair with aerial arrays to cover all parts of the British Commonwealth. It had been built in a great hurry to be ready for the first special Christmas Day program, which has been somewhat of an event in our organization ever since. In short this program consists of a world-wide hookup, bringing in items from remote parts of the Empire, and culminating in a speech by His Majesty the King. For these programs there is always a lot of preparation and a very elaborate system of cuing. In this case there had been plenty of advance publicity and organization of the local broadcasting by public loudspeakers and relaying of all kinds. However, the new station which had been open a few days seemed to be working well and there seemed to be no serious risk of anything approaching complete failure. Just about twenty minutes before the start I thought I would pay a visit to our main control room to see that all was well and that everybody was happy. I was met at the door with the news that a message had just been received from the new short-wave station that a fault had developed on the power-control gear, which affected the main power supply to all the transmitters and at the moment none of them could even be started up. The engineer in charge of the new station reported that he did not exactly know what was the matter, but he was trying to sort out the trouble among the control gear just to make the circuit breakers stay in somehow. He said he thought he would take at least half an hour, and by that time there was about ten minutes to go, and it was no use coming up late. There was nothing I could do, I just had to sit down for ten minutes or so and picture the loudspeakers in market places and clubs and towns and villages all over the Empire, with crowds waiting and nothing coming through. Then I began to wonder what sort of an explanation to put out.

Well, to cut a long story short, the carrier waves came up exactly one minute before the zero hour. The engineer in charge immediately admitted afterwards that he had only a very vague idea of what the effect would be of cutting out a great deal of the control circuits. He just took a few shots in the dark and got away with it. I have always remembered this incident in vivid detail, trivial as it certainly seems against the background of war, and the experiences it has brought with it.

In conclusion I want to send my cordial greetings to your conference, and in particular, to your President, Doctor Lynde P. Wheeler, and to wish him every success in his year of office. Finally, I want to thank you all for listening so patiently to this somewhat distant message.

Radio Engineering in Wartime*

JAMES LAWRENCE FLY†, NONMEMBER, I.R.E.

EARLIER today, at meetings of radio engineers all over the United States, you heard technical papers on many aspects of radio engineering for war. Tonight, with these meetings all linked together through the courtesy of the Columbia Broadcasting System, I should like to tell you engineers at home one of many dramatic stories of radio engineering on the fighting fronts. It comes from war correspondent William Merriam of the Australian Broadcasting Company, as monitored via London by the Federal Communications Commission's Foreign Broadcast Intelligence Service.

Last February, the Island of Timor, a few hundred miles north of Australia, was seized by the Japanese. Several detachments of commandos were left stranded on the Portuguese portion of the island, with little equipment and no communications to the Australian mainland. But the commandos did not surrender.

Their only hope was to establish contact with a home base, and, as their own transmitter was almost completely demolished, the five radio engineers in the detachment had an apparently impossible task.

* Decimal classification: R560. Original manuscript received by the Institute, March 4, 1943. Presented, Winter Conference, New York, N. Y., January 28, 1943.

† Chairman, Federal Communications Commission, Washington, D. C.

Scouting parties brought back two heavy pieces of radio equipment across 40 miles of enemy terrain. Both were receivers, and not in working condition.

By planning a new transmitter circuit and tinkering, however, they made an agglomeration of parts salvaged from the old transmitter and the two newly acquired receivers. This when combined with scraps of wire, solder, and old pieces of tin would transmit.

But they still lacked electrical power. Their batteries were run down. A charger improvised from an old automobile generator geared to a hand-turned wooden wheel worked, but not well enough. And at this juncture the Japanese, always close at hand, began closing in. So the men had to load the precious parts on their backs and move into a new hideout.

A midnight raid behind the Jap lines netted a Japanese battery charger. But another obstacle arose; the charger would not run on Diesel oil, the only liquid fuel available. A second raid yielded kerosene; and after much experimenting the battery charger was made to run on a mixture of kerosene and Diesel oil.

When after two months they at last went on the air, they got no answer. Their signal was picked up and relayed to Darwin, but not answered for fear it was a Japanese booby trap. All radio transmitters in Northern Australia, however, were ordered off the air to make sure that nothing interfered with further signals from Timor.

The next night Radio Timor tried again and succeeded. The makeshift transmitter, built from salvaged parts and thrown together in a mountain hideaway, successfully reopened communications with the mainland. As a result, we learned from last week's paper that the commandos on Timor are still fighting on. And we are told that the five radio engineers celebrated their success by smoking the last tin of tobacco they had been saving during the 59 days of their isolation.

This story of ingenuity and perseverance in war production on the battlefield is not without its counterpart at home. The problems you engineers face in inventing, designing, and manufacturing the necessary equipment for the armed forces of ourselves and our allies, while less stirring than those besetting the commandos, are equally difficult, as seemingly impossible and as demanding in ingenuity and plain hard work. Less dramatic, perhaps, but of basic importance are the day-to-day accomplishments in radio laboratories and factories all over the country. In this war of speed and movement, radio equipment which you are turning out is as essential as arms and ammunition. The stakes which hinge upon your doing the best possible job are nothing less than victory or defeat.

Just as transport is the bloodstream of modern warfare, so communications is its nerve system. Every bomber, every tank, every submarine is radio-equipped today and relies on radio for its efficacy in battle. Nor is your work limited to communications. There are other fields in which radio plays an important role, such as radio location devices.

Your newly elected national president, Dr. Lynde P. Wheeler, who assumed office this afternoon, and of whom we in the Federal Communications Commission are justly proud, has done his bit of research, for example, in undersea communications.

The research problems which radio engineers must conquer today would have baffled any scientist a generation ago. We need microphones, for example, which will transmit the human voice but not the engine noises of a four-motored bomber hurtling through the air at high speeds. We need direction-finding apparatus which will locate the plane, ship, or land station from which a given radio signal emanates. We need walkie-talkie radios, light enough to be carried into battle. Even the common variety of radio receiver must be re-engineered if it is to be used on board ship, in order to prevent telltale radiations from revealing the location of the ship to enemy raiders. Above all, we need absolute dependability in all war communications apparatus. Such design problems as these are daily being met and solved.

After such equipment has been invented and designed, it must be manufactured. It's one thing to invent a new radio circuit or design a new piece of apparatus; it's something else again to put that apparatus into mass production, with a minimum of delay and a maximum saving of scarce raw materials.

During the comparatively peaceful 1920's and 1930's the radio-manufacturing industry turned out ordinary radio receivers by the million, and indeed by the tens of millions, to meet popular demand. With the coming of war and our own war program, you were called upon to convert, almost overnight, an industry geared to peacetime radio listening into an industry turning out tools of war. You radio engineers are to be congratulated on the completeness, the efficiency, and the smoothness with which you have done the job. The results are known not only to our own fighting forces and to our allies, but to the enemy as well.

Though the job to date fully merits your digging into that can of tobacco, you ought to save the greater part yet awhile. The efforts of radio engineers cannot be relaxed. Just the contrary. In no war has technical progress moved as rapidly as in this. The engineering marvel of January may be the obsolete technique of December. The enemy, too, has skilled engineers, and must not be underrated. If American forces are to advance with superior communications equipment, the rate of engineering progress must be maintained and indeed accelerated. If the enemy engineers are good, our own are and must be even better. It is with that thought that I would leave you, secure in the knowledge that in every radio laboratory, every factory, and every communications office in the land, all of us will give our utmost, now, and for the duration.

Institute News and Radio Notes

Television Prospects

If television did nothing more before the war than train engineers in the art of high-frequency work, it was well worth while, for this knowledge has been extremely important to the Allies in the war now being fought, Dr. W. R. G. Baker, General Electric vice president, told the Schenectady, N. Y., Advertising Club on April 7, 1943.

When peace comes, radio manufacturers, now devoting all their facilities to war production, will be prepared to build reasonably priced television sets in large volume, he said. They will be clamoring for work, but before they can produce these sets a decision must be made on standards, just as such a decision was reached in the prewar era by the National Television System Committee. The place of television in the frequency spectrum must be determined, he said. What the standards should be will be the big problem to decide, for the decision will affect the industry for many years.

High frequencies never before available to the television engineer have been brought into use as a result of war research, he said, comparing the prewar television frequency band with a small boat. "Let us imagine this small boat as the only means of contact between two countries on opposite sides of a river, and the amount of trade and intelligence passing between the countries being limited by the boat's capacity. War research has broadened the usable television frequency band just as a bridge built across the river between the countries would provide greater capacity for traffic between these countries."

The television sets built after the war probably will produce pictures in black and white because color television may be too expensive and still has not been worked out to the engineer's satisfaction. Color television will come, he said, but probably not for some time after the war ends. Then, too, any immediate adoption of color television would make obsolete much of the transmitting equipment of the nation's eight television stations which will form the nucleus for immediate postwar television broadcasting. These stations probably will start branching out with full-scale programs shortly after the war ends, it was explained.

When peace comes, manufacturers will have tremendous capacities to make television tubes in America. Large-scale production and other developments will drastically reduce the prewar price of these tubes which will be among the elements that will bring about reasonably priced television sets, he said.

Postwar relaying of programs will be done with coaxial cables or television relay stations, or possibly a combination of both, it was explained, and only developments will tell who will operate these relay links. The General Electric Company has had a relay station in operation for over three years. Located in the Helderberg Mountains outside Albany, N. Y., the station picks up programs from the NBC television station in New York City and relays them to the Albany-Schenectady-Troy area through General Electric's WRGB transmitter. This is the nation's pioneer television network, he pointed out, being in service since January 12, 1940.

Television is essentially a line-of-sight operation from transmitter to receiver. Stations, therefore, will probably be located in the larger cities, with transmitters located where they can reach the most receivers, he said.

The size of the picture produced by a television set will depend on public demands, the advertising audience was told, but in Dr. Baker's opinion the American people will not want a picture the size of the wall in their living rooms. The average person probably will want a picture from 12 to 15 inches square so that he can sit seven or eight feet away from the television set and enjoy the program, it was explained.

There is no technical reason why motion-picture houses cannot receive and project special television pictures on their screens after the war if such a procedure can be made economically sound and if managers can attract audiences to the theaters to see these pictures.

Dr. Baker left to the audience's imagination the effect of television on people's lives, quoting the old Chinese proverb that a picture is worth 10,000 words.

Board of Directors

The regular meeting of the Board of Directors took place on April 7, 1943, and those present were: L. P. Wheeler, president; S. L. Bailey, W. L. Barrow, I. S. Coggeshall, H. T. Friis, Alfred N. Goldsmith, editor; G. E. Gustafson, O. B. Hanson, R. A. Heising, treasurer; F. B. Llewellyn, Haraden Pratt, secretary; F. E. Terman, B. J. Thompson, H. M. Turner, A. F. Van Dyck, W. C. White, and W. B. Cowilich, assistant secretary.

Approval was granted to the 151 applications for Associate, 144 for Student, and 4 for Junior grades.

The following Bylaws amendment was voted:

> "Section 50: The President, the Secretary, the Treasurer, the Editor, and at least two other members of the Board of Directors shall comprise the Executive Committee. The President shall be Chairman, the Treasurer shall be Vice Chairman and the Secretary shall be Secretary of the Executive Committee. The terms of appointments of all members of the Executive Committee, except the President, shall start with the first meeting of the Committee after appointment and shall continue notwithstanding any change in status on the Board until the first meeting of the succeeding Executive Committee."

It was noted that letters, with reference to the proposed Constitutional amendments published in the April, 1943, issue of the PROCEEDINGS, had been received and that they would soon be included in the PROCEEDINGS, under the section headed "Correspondence."

Treasurer Heising, in his capacity as chairman of the Constitution and Laws Committee, reported that the proposed Constitutional amendments comply with the law in the opinion of the Institute's General Counsel Harold R. Zeamans.

The decision was made to mail the ballots relative to the Constitutional amendments, on or before July 1, 1943.

It was announced that the committee consisting of President Wheeler, chairman; and Messrs. Gustafson, Hanson and White, had been formed to make further investigation and recommendation relative to the Institute's study of postwar problems of the radio industry.

The following personnel of the Technical Committees were appointed to serve for the annual term beginning May 1, 1943:

Technical Committees

ANNUAL REVIEW

L. E. Whittemore, *Chairman*

R. S. Burnap	R. F. Guy
C. R. Burrows	Keith Henney
W. G. Cady	I. J. Kaar
J. L. Callahan	G. G. Muller
C. C. Chambers	H. M. Turner
C. J. Franks	A. F. Van Dyck

H. A. Wheeler

ELECTROACOUSTICS

G. G. Muller, *Chairman*

S. J. Begun	G. M. Nixon
F. V. Hunt	Benjamin Olney
V. N. James	H. F. Olson
Knox McIlwain	H. H. Scott

L. J. Sivian

ELECTRONICS

R. S. Burnap, *Chairman*

E. L. Chaffee	J. A. Morton
H. P. Corwith	I. E. Mouromtseff
K. C. DeWalt	L. S. Nergaard
W. G. Dow	G. D. O'Neill
L. A. DuBridge	H. W. Parker
R. L. Freeman	H. J. Reich
T. T. Goldsmith, Jr.	A. C. Rockwood
	J. B. Russell
L. B. Headrick	Bernard Salzberg
D. R. Hull	C. M. Wheeler
S. B. Ingram	J. R. Wilson
Ben Kievit, Jr.	Irving Wolff
J. M. Miller, Jr.	Jack Yolles

H. A. Zahl

Facsimile

J. L. Callahan, *Chairman*

Maurice Artzt	P. A. Lefko
E. P. Bancroft	H. J. Lavery
J. C. Barnes	B. V. Magee
F. R. Brick, Jr.	Pierre Mertz
W. A. R. Brown	G. D. Robinson
G. V. Dillenback, Jr.	L. A. Smith
	F. T. Turner
J. V. L. Hogan	R. J. Wise
L. C. Horn	C. J. Young

Frequency Modulation

C. C. Chambers, *Chairman*

J. E. Brown	V. D. Landon
W. F. Cotter	H. B. Marvin
M. G. Crosby	D. E. Noble
W. L. Everitt	B. E. Schackelford
R. F. Guy	D. B. Smith
C. M. Jansky, Jr.	L. P. Wheeler
W. D. White	

Radio Receivers

C. J. Franks, *Chairman*

G. L. Beers	David Grimes
W. M. Breazeale	J. K. Johnson
W. F. Cotter	Garrard Mountjoy
Harry Diamond	H. O. Peterson
W. L. Dunn	E. K. Stodola
H. B. Fischer	A. E. Thiessen
H. C. Forbes	H. P. Westman
D. E. Foster	R. M. Wilmotte

Radio Wave Propagation

C. R. Burrows, *Chairman*

S. L. Bailey	H. R. Mimno
J. L. Barnes	K. A. Norton
J. H. Dellinger	H. O. Peterson
W. A. Fitch	H. P. Thomas
G. D. Gillett	W. D. White

Standards

H. A. Wheeler, *Chairman*

R. S. Burnap	C. J. Franks
C. R. Burrows	R. F. Guy
W. G. Cady	I. J. Kaar
J. L. Callahan	G. G. Muller
C. C. Chambers	H. M. Turner

Symbols

H. M. Turner, *Chairman*

R. R. Batcher	E. T. Dickey
M. R. Briggs	H. S. Knowles
R. S. Burnap	O. T. Laube
C. R. Burrows	Allen Pomeroy
J. H. Dellinger	E. W. Schafer

Television

I. J. Kaar, *Chairman*

H. S. Baird	P. C. Goldmark
J. E. Brown	T. T. Goldsmith, Jr.
A. B. DuMont	
D. E. Foster	A. G. Jensen
L. M. Leeds	A. F. Murray
H. M. Lewis	R. E. Shelby
A. V. Loughren	D. B. Sinclair
H. T. Lyman	D. B. Smith

Transmitters and Antennas

R. F. Guy, *Chairman*

Andrew Alford	W. E. Jackson
R. Asserson	R. W. P. King
M. R. Briggs	J. F. Morrison
W. W. Brown	J. C. Schelleng
Harry Diamond	Robert Serrell
W. S. Duttera	D. B. Sinclair
Sidney Frankel	W. D. White
F. A. Gunther	J. E. Young

Editor Goldsmith reported that, if no exception were obtained, the modified WPB Paper Limitation Order L-244 As Applied to Magazines, issued March 26, 1943, would require the Institute to make drastic reductions in the number of pages and copies of future issues of the Proceedings. It was also stated that, on the other hand, a sharp increase in the use of paper for the Proceedings had taken place mainly as the result of a gratifyingly large gain in members and papers.

President Wheeler and Institute's General Counsel Zeamans were chosen to present the appeal to the War Production Board at Washington, with the supporting data being prepared by Editor Goldsmith and Assistant Secretary Cowilich.

President Wheeler called attention to the six recent letters requesting information on the Institute's policy relative to the inactive status of members in the armed services, and to the continued application of the Executive Committee's previous recommendation in such cases.

Mr. Coggeshall, chairman of the 1943 Winter Conference Committee, announced that the expenses of the recent conference amounted to $365.61.

The subject of conventions during the war period was discussed, and it was voted to hold no summer convention this year.

It was pointed out by President Wheeler that a review is being made of the Institute Representatives on Other Bodies.

Appointment was made of Mr. G. R. Schull to serve as Institute Representative at Rose Polytechnic Institute.

Approval was given to a matter pertaining to the Institute's investments.

Executive Committee

The Executive Committee met on April 6, 1943, and those in attendance were L. P. Wheeler, chairman; Alfred N. Goldsmith, editor; R. A. Heising, treasurer; F. B. Llewellyn, A. F. Van Dyck, H. R. Zeamans, general counsel; Haraden Pratt, secretary; and W. B. Cowilich, assistant secretary.

The Audit Bureau of Circulations' statement, relative to the distribution of the Proceedings during the last six months of 1942, was discussed.

The 151 applications for Associate, 144 for Student, and 4 for Junior grades were approved for confirming action by the Board of Directors.

Consideration was given to a change in the payroll system and a review of other accounting methods of the Institute. Arrangements for beginning the Institute's 1943 financial audit were also discussed.

Provision was made to mail the December dues' bills of members in foreign countries, exclusive of those in North America, to reach those members about December first, with due allowance for transit time.

It was noted that in accordance with the Bylaws Section 16, the "Notice of Termination of Membership," dated April 1, 1943, was sent to those members whose dues had failed to reach the Institute.

General Counsel Zeamans approved, from the legal standpoint, the Constitutional Amendments which were recently proposed and which were published in the April, 1943, issue of the Proceedings.

Letters relative to the proposed Constitutional Amendments, which had been received, were discussed and it was noted that they would soon be published in the Proceedings.

Editor Goldsmith reported on the modified WPB Paper Limitation Order L-244 As Applied to Magazines, issued March 26, 1943. If no exception from this order were granted, drastic reductions would have to be made in the planned number of pages and copies to be printed of the future issues of the Proceedings.

It was also stated that, according to the current trend, the printing rate of the Proceedings would approach 16,000 to 17,000 copies an issue, possibly with as many as 150 pages to an issue, before the end of this year. This rate would be practically double that of last year.

Chairman Wheeler announced that he and General Counsel Zeamans would present the Institute's appeal, in behalf of the Proceedings, to the War Production Board, at Washington, and submit the supporting data and other material being prepared by Editor Goldsmith and Assistant Secretary Cowilich.

The list of the Technical Committee personnel, to serve for the annual period beginning May 1, 1943, was submitted by Dr. Llewellyn, who is charged with this phase of the Institute's activities. This list was recommended to the Board of Directors for approval.

As a policy, it was decided to confine the distribution of the Institute's Yearbook to members, with the possible exception that it would be supplied on bona fide requests from Government departments, and thus copies will not be made available to any other organizations or individuals.

Government requests for permission to have envelopes addressed from the Institute's membership stencils were approved.

In the case of requests from new members, the decision was reached to make a nominal charge for the Institute's

Standards, which had been published prior to their election to membership. However, the new standards, published during the period of a member's affiliation, would as in the past be mailed automatically and without any charge beyond the dues for that year.

A report was made on six additional inquiries for information relative to the Institute's policy on the inactive status of members in the Armed Services. It was noted that in most of the cases, the members had arranged to maintain their memberships on an active basis and, where it was not satisfactory for them to receive the PROCEEDINGS direct, had requested that the copies be forwarded to relatives or held in reserve by the Institute, as recommended by the Institute.

The subject of a life membership in the Institute was discussed and it was agreed that no such arrangement could be favorably considered for the present.

Assistant Secretary Cowilich reported that the expenses for the 1943 Winter Conference amounted to $365.61.

Editor Goldsmith announced that the publication of the 1913–1942 Cumulative Index of the PROCEEDINGS had been delayed solely as the result of the printer being shorthanded because of wartime conditions. The Index has been scheduled for distribution with an early issue.

The subject of conventions was discussed but the matter was referred to the Board of Directors.

It was agreed to review the entire list of Institute Representatives on Other Bodies.

Election Notice

Article VII, Section 1, of the Institute's Constitution is reprinted below as it contains all of the information pertinent to the election of Officers and Directors. Following it will be found the names of the candidates nominated by the Board of Directors. The names of these nominees will appear on the ballot to be mailed to the membership between August 15 and September 1.

"On or before July first of each year, the Board of Directors shall submit to qualified voters a list of nominations containing at least one name each for the office of President and Vice President and at least six names for the office of elected Director and shall call for nominations by petition.

"Nominations by petition may be made by letter to the Board of Directors setting forth the name of the proposed candidate and the office for which it is desired he be nominated. For acceptance a letter of petition must reach the executive office *before* August fifteenth of any year and shall be signed by at least thirty-five voting members.

"Each proposed nominee shall be consulted and if he so requests his name shall be withdrawn. The names of proposed nominees who are not eligible under the Constitution shall be withdrawn by the Board.

"On or before September first, the Board of Directors shall submit to the voting members as of August fifteenth, a list of nominees for the offices of President, Vice President, and elected Director, the names of the nominees for each office being arranged in alphabetical order. The ballots shall carry a statement to the effect that the order of the names is alphabetical for convenience only and indicates no preference.

"Voting members shall vote for the candidates whose names appear on the list of nominees, by written ballots in plain sealed envelopes, enclosed within mailing envelopes marked "Ballot" and bearing the member's written signature. No ballots within unsigned outer envelopes shall be counted. No votes by proxy shall be counted. Only ballots arriving at the executive office prior to October twenty-fifth shall be counted. Ballots shall be checked, opened, and counted under the supervision of the Teller's Committee between October twenty-fifth and the first Wednesday in November. The result of the count shall be reported to the Board of Directors at its first meeting in November and the nominees for President and Vice President and the three nominees for Director receiving the greatest number of votes shall be declared elected. In the event of a tie vote the Board shall choose between the nominees involved."

For President—1944
H. M. Turner

For Vice President—1944
E. M. Deloraine

For Directors—1944–1946

S. L. Bailey	R. K. Potter
G. E. Gustafson	F. X. Rettenmeyer
R. F. Guy	W. C. White

Correspondence Concerning Proposed Constitutional Amendments

From: B. J. THOMPSON

The proposed amendments of the Constitution of the Institute which were published in the April PROCEEDINGS (pages 182 and 183) have come to may attention. I am writing this letter in support of the amendments establishing a new grade of membership.

I have had the opportunity to participate in discussions leading to some of the earlier amendments of the Constitution affecting the membership structure, as well as in those concerning the present proposal. It may be of interest to review the situation as I have seen it develop. At one time all members of the Institute other than Juniors and Students had the right to vote in Institute affairs. Eighty per cent or more of the voting membership was in the Associate grade, the only Constitutional qualifications for which were that the applicant be over twenty-one years of age and be "interested" in radio. It was believed that a considerable majority of the voting membership of the Institute were not professional radio engineers. (I use the term "radio" to include all allied fields served by the Institute.) As a result, the Board of Directors did not feel free to take actions which were likely to secure the support of only the professional radio engineers, even though they felt very strongly that it was the primary purpose of the Institute to serve this group. Because of this situation and in an attempt to concentrate the voting rights in the hands of the professional members, an amendment was proposed and was adopted on March 1, 1939, under which new Associates and all Associates who at any time allowed their memberships to lapse would no longer have voting rights.

This measure was remarkably effective. At the end of 1942 there were approximately thirty-six hundred nonvoting Associates as compared with about twenty-six hundred voting Associates. Of the nonvoting Associates a large minority are professional radio engineers, while of the voting Associates probably more than half are professional men. These professional Associates with voting rights constitute one of the Institute's serious problems. Annually they are in danger of allowing their memberships to lapse with consequent loss of voting rights and almost equally consequent ill feeling.

There are approximately a thousand Members and Fellows of the Institute, whose voting rights are assured. The Member grade is expanding very slowly. The voting Associate grade is contracting rather rapidly. As time goes on the voting control of the Institute is passing into the hands of a continually shrinking fraction of the professional membership of the Institute. This is a very dangerous situation. While it is very desirable to have the voting control of the Institute in the hands of only the professional members, it is equally desirable that this voting control be in the hands of as large a fraction as possible of these professional members.

This serious difficulty would be removed by transferring the professional members into a professional grade of membership with assured voting rights, but this is not possible at present. While many of the present Associates are qualified to transfer to the present Member grade, they have persistently failed to do so for a variety of reasons. There is no reason to expect an early change in this situation.

Many more of the present Associates are not qualified for the present Member grade, even though they are professional radio engineers. Let us examine briefly the typical requirements. A man must be twenty-six years old and must *"have performed and taken responsibility for important radio engineering or scientific work."* The Admissions Committee and the Board of Directors interpret "responsibility" and "important" strictly in accordance with the high standards which have been set for Membership in the Institute. Very many professional radio engineers never

meet these qualifications. Even of those who apply for admission or transfer to the Member grade, a large fraction is found unqualified. Further, many men who may be qualified do not apply for transfer because they are not sure that their applications will be approved and doubtless many others do not wish to take the initiative in advancing their claims to such qualifications.

The solution to this problem of getting the professional members of the Institute into the professional grades lies in the proposed amendment establishing a new Member grade, a typical qualification for which is that the Member be at least twenty-four years old and that as an engineer or scientist "he shall have demonstrated competence in (radio) engineering or science of professional character." The admission fee and dues for this new Member grade are to be the same as for the present Associate grade. Thus, if a man *is* a professional radio engineer he is almost surely qualified for this new grade. And there is no obstacle to his transfer in the nature of increased dues.

Upon the adoption of this amendment there will be no reason why the Board of Directors cannot transfer all qualified Associates to the new Member grade without application on their part; thus, the way will be open for the separation of professional members from nonprofessional, independent of the outcome of a campaign for voluntary transfer to the new Member grade.

As a matter of clarification, it might be pointed out that the qualifications for the proposed Senior Member grade are almost identical with those of the present Member grade so that doubtless the Board of Directors will automatically transfer the present Members to the grade of Senior Member upon the adoption of this amendment, thus maintaining the significance and prestige of this class of membership.

In conclusion, I wish to state that I regard the adoption of this amendment as highly important to the future welfare of the Institute, particularly with respect to its development as a professional society of expanding influence.

From: H. M. Turner

For some time it has been thought that a larger proportion of our members should be in the Member grade and the fact that we have only 12 per cent in this grade compared with 24 per cent for the American Institute of Electrical Engineers tends to confirm this view. Although older societies place a greater value on professional recognition than do younger ones this does not account for so large a difference. It has been suggested that our requirements are too high, but I do not believe this is true. However, you will soon be asked to vote upon a constitutional amendment lowering the standards of the Member grade. This proposal should receive your most thoughtful consideration to determine whether or not, over a period of years, it will be to the advantage of the Institute to adopt it. Logic rather than emotion should govern your vote.

Why should an engineer desire to become a Member? Because of the distinction and prestige this grade confers, as a result of high standards built up over more than a quarter of a century. That recognition and prestige will come as a result of a "yes" vote is an illusion. Were it so simple, why not vote still greater honor by advancing all Associates and Members to the Fellow grade? In grasping for the form the substance vanishes. The very thing that makes the Member grade attractive would be lost by its indiscriminate bestowal. The term of Member should remain a badge of honor.

The Institute of Radio Engineers should not become a Radio Electricians Club. To avoid this, care should be exercised to make sure that only qualified engineers are admitted as Members. This is the only possible way that the term can retain any significance. However, the higher grades should not stand for exclusiveness but should be open to those who qualify and it is my conviction that large numbers do so now without lowering the standards at all. This conclusion is confirmed by Mr. H. P. Westman, former secretary, who has intimate knowledge of the membership situation based on a dozen years' experience, and it is his belief that the suggested amendment misses completely the most important problem, namely, getting in those who meet the present constitutional requirements.

Why then, it may be asked, do not these qualified Associates apply for advancement. There are several reasons given in order of increasing importance: not interested in higher grade of membership; do not want to pay the higher dues; fear of not being accepted; lack of appreciation of professional recognition. It should be pointed out that our dues are extremely low as compared with other comparable societies. The service rendered its members is very great, in fact, the positions held by radio engineers were created largely through technical advances made public through the Proceedings, thus placing a professional obligation on the engineers to support the Institute. Fear of rejection should not influence one against making application for very few persons, other than the sponsors, know that an application has been made, and they are most sympathetic. The most important duty of the Admissions Committee is to facilitate admission to the proper grade and the greatest difficulty is to get from the sponsors an evaluation of the applicant's qualifications rather than an enumeration of the positions he has held. It is frequently necessary to write for further information which delays final approval; this is annoying to the applicant but it is necessary in the interest of the Institute to secure facts on which to base recommendations to the Board of Directors. No doubt some of this delay could be avoided by the Institute providing better instructions to the applicant regarding the selection of sponsors and to the sponsors as to the type of information desired. Appreciation of the value of professional recognition will come with time but the Institute has an obligation to bring its importance to the attention of the younger engineers.

As is well recognized, too few Associates now apply for advancement to Member grade. If the amendment is adopted still fewer will apply for they will be Members in name and, without any increase in dues over what they are now paying, will have all the rights and privileges of the proposed new Senior Members, except that of being Director. Obviously, this is not fair to our present Members.

If the amendment is adopted, there will be fewer transferring to the grade paying the higher dues and undoubtedly it will be necessary to raise the dues of all in order to meet expenses.

After many years of experience, the American Institute of Electrical Engineers, which most closely parallels our own Institute, and many other technical societies, have adopted three grades of membership: Fellow, Member, and Associate. These designations have definite meaning and value. To introduce a new grade will only add confusion. The Associate grade connotes professional standing and a dignity in keeping with the maturity and experience of the younger members. While it is true that in the early days many Associates were merely interested in radio, but the number in this group has been decreasing for a number of years until now there are very few in it. Most Associates now make radio their profession.

Professional standing is an elusive quality and cannot be achieved by so simple a device as changing the name of a grade by a constitutional amendment. This is a matter of more importance to the younger members than to the older ones. A delay of a year or so, until they acquire the necessary experience and prestige, is involved; this delay is of small importance compared to maintaining the prestige of your Institute. If one were about to have a major operation, would a surgeon from a "diploma factory" inspire the same confidence as one from a school of recognized standing?

G. W. Pierce

In recognition of "his outstanding inventions and contributions to the fields of electrical communications, and his inspiring influence as a great teacher," George Washington Pierce was awarded the Franklin Medal at the annual Medal Day ceremonies of The Franklin Institute, in Philadelphia, on April 21, 1943.

Professor Pierce, who is a Fellow of the Institute of Radio Engineers, formerly held the chairs of Rumford Professor of Physics and the Gordon McKay Professor of Communications Engineering at Harvard University. He is the author of the two standard works, "Principles of Wireless Telegraphy" and "Electric Oscillations and Electric Waves," and numerous technical papers.

In the announcement of the award to Professor Pierce, the Franklin Institute adds that "his interest in electric oscillations led Professor Pierce to experiment with mercury-vapor arcs and the outcome of his research was the mercury-vapor detector and amplifier. This tube was the equivalent to the 'Thyratron' developed

later in the laboratories of the General Electric Company. The chief difference is in the 'Thyratron's' use of a hot cathode in a gaseous atmosphere as a source of electrons instead of the mercury tube and "keep-alive" circuit employed by Professor Pierce, but Pierce in his patents in this field also disclosed the hot cathode as source.

"After Cady had pointed out that the piezoelectric effect of quartz crystals could be used to control the frequency of electrical vacuum-tube oscillators, Professor Pierce began the study of suitable oscillator circuits for use with quartz crystals. He produced three fundamental types of circuits employing one tube and one set of electrodes on the crystal. Cady had employed two tubes and two sets of electrodes, so that Pierce's circuits were a considerable simplification and led to the use of the crystal as an essential frequency-producing element instead of a mere resonant stabilizer of the oscillator.

"This discovery is one of the most important made in radio during the past twenty years. Because of the necessity for holding frequencies to narrow limits, all broadcast stations are required by law to employ quartz-crystal stabilization.

"When a bar of iron or nickel is magnetized it changes shape due to the effect called magnetostriction. Also, when a bar of iron is deformed it generates a magnetic moment by a converse effect. These two effects may be compared to the direct and converse piezoelectric effects in a quartz crystal. Professor Pierce recognized that the phenomenon of magnetostriction could be used to control the frequency of oscillators by mechnical resonance in the same way as with quartz crystals. Near the frequency of mechanical resonance, bars of proper composition exhibit a considerable reaction on the electric impedance of a coil wound around them. Pierce devised a number of circuits for making use of this property.

"Professor Pierce has also made and published a large number of inventions in sound and supersonic devices for use in transmitting and detecting underwater acoustic vibrations.

"His profound knowledge of theoretical and practical physics, and his ability to design workable equipment have been a source of constant amazement to Professor Pierce's associates. His influence has been widely impressed upon the field of electrical communications, for the majority of men who are engaged upon important work in radio engineering all over the world have studied in his classes. His courses in wireless telegraphy were among the first to be given anywhere and for years were a standard on which other schools based their curricula. Pierce recognized that electrical communication was neither physics nor engineering, but a combination of the two. He always insisted upon a liberal groundwork of mathematics and usually left the engineering part to be developed by the student himself as he went along. Professor Pierce worthily takes his place among men like Einstein, Marconi, Planck, Thomson, and Rutherford, who are former recipients of the Franklin Medal."

G. E. Gustafson

Karl E. Hassel

J. E. Brown

Zenith Elects New Officers

A group of new officers of the Zenith Radio Corporation was elected at the last meeting of the board of directors, it was announced on April 13 by Commander E. F. McDonald, Jr., Zenith president. Among them are the following.

G. E. Gustafson, Fellow of the I.R.E., who has been with the company since 1925, has held the post of chief engineer since 1933, and has been assistant vice president since 1940, was elected vice president in charge of engineering.

Karl E. Hassel, Member of the I.R.E., engineering executive, who with Commander McDonald and Ralph Mathews was an original founder of the company and who has been a director of the corporation since 1932, was elected assistant vice president.

J. E. Brown, Member of the I.R.E., Zenith's engineer specialist in television and frequency modulation since 1937, was elected assistant vice president.

Dudley E. Foster

Mr. Dudley E. Foster, Member of the Institute of Radio Engineers, has been named vice president in charge of engineering of the Majestic Radio and Television Corporation, it was announced on April 10, 1943, by Mr. E. A. Tracey, president and general manager of the corporation.

Mr. Foster has had a long association with the radio industry beginning in 1913. He is a graduate of Cornell University in electrical engineering and was formerly chief engineer of the Case Electric Company of Marion, Indiana, and later the U. S. Radio and Television Corporation. In 1934, he joined the RCA License Laboratories as division engineer in charge of the engineering division of those laboratories. He then became vice president of Rogers-Majestic, Ltd., in Toronto, Canada.

Mr. Foster has contributed many technical articles to a number of the technical trade journals. He holds over 40 patents in the radio and television field and, in 1940, was given the Modern Pioneer award by the National Association of Manufacturers for his inventive contributions to the electronic field.

Books

Ultra-High-Frequency Techniques, Edited by J. G. Brainerd in collaboration with Glenn Koehler, Herbert J. Reich, and L. F. Woodruff

Published, 1942, by D. Van Nostrand Company, Inc., 250 Fourth Avenue, New York, N. Y. 519+xi pages+14-page index. 316 figures. 6½×9½ inches. Price, $4.50.

This book presents in a unified manner the material required as a minimum basis for advanced technical work in the ultra-high-frequency field. Its subject matter covers a course outlined by representatives of some forty institutions who met at the Massachusetts Institute of Technology to consider means for creating an immediate source of men trained on a high level for work in electrodynamics and especially the ultra-high-frequency field. The specialized knowledge covered is that which was considered important for men who would be working with the Army, Navy, and Marine

Corps, in training electronic technicians in Government research and development, and in industrial activities devoted to the meeting of military and naval requirements in this branch of technology.

The general level of the book is that of senior students in electrical engineering and physics. Sufficient theoretical and other material from ordinary communication courses is presented (in condensed form) to enable the student to progress through the chapters containing newer subject matter without the necessity for frequent reference to other texts. While the mathematical background of the subject matter is quite fully covered, particularly in such fields as radiation and hollow wave guides where the student is likely to meet new material, the authors have so organized their presentation as to make the text very useful to a person seeking specific information who does not wish to become involved in more detailed mathematical theory.

The text deals with elements rather than systems. It covers no specific military material but presents the subjects covered from a viewpoint which is useful in its application to specialized requirements. In addition to chapters covering the standard fundamentals, such as circuit analysis, electron tubes, amplification, modulation, transmitters, receivers, transmission lines, radiation and propagation, the book includes chapters on the following subjects which are unusually interesting and timely: Trigger circuits (gates), pulse-sharpening circuits and oscillators; cathode-ray tubes and circuits, and hollow wave guides. The concluding chapter consists of a laboratory manual of twenty-five pages. The last half of the chapter on hollow wave guides also deals with practical aspects and applications.

The co-ordination of the work of the several authors is excellent. The bibliography references in the various chapters have been carefully chosen.

L. E. Whittemore
American Telephone and
Telegraph Company
New York, N. Y.

Short Wave Radio, by J. H. Reyner

Published by the Pitman Publishing Corporation, 2 West 45 St., New York, N. Y. Third (revised) edition, 1942. 183 pages+3-page index+xiv pages. 97 figures. 5×7½ inches. Price, $3.25.

This book presents a nonmathematical account of basic high-frequency practice and technic. Its "pocket" size permits its study whenever time permits and its presentation of the subject is such that it provides excellent supplementary reading for sound technicians and low-frequency operators who are now engaged in high-frequency work. The book, however, contains no reference to the most recent developments in ultra-high-frequency operation, since unfortunately that information must await the removal of publicity restrictions.

The treatment of the various items is concise and clear and is mainly descriptive. Unusual terms are separately defined or described in a glossary. A chapter has been added to this edition on the subject of frequency modulation.

Ralph R. Batcher
Hollis, L. I., N. Y.

Television Standards and Practice, Edited by Donald G. Fink

Published by the McGraw-Hill Book Company, 330 West 42 Street, New York, N. Y. 391 pages+13-page index+x pages. 115 figures. 6¼×9 inches. Price, $5.00.

This book is a compilation of abstracts from the Proceedings of the National Television System Committee which has been carefully edited. Many of the important technical reports which represented the backbone of the standards finally arrived at are introduced in this work. Practically every phase of television engineering has been analyzed, bringing forth the latest information from many laboratories. Mr. Fink deserves much credit for having assembled these somewhat dry records on individual systems into subject groups covering synchronization, polarization, etc.

It is because this book is addressed to a great extent to those who participated in these meetings that the index—which is, of course, not a novel feature in a book of this sort—is so valuable, for it is often not easy to find just what one may be looking for in these voluminous records.

To the uninitiated this book will reveal the work that goes on behind the scenes in the creation of certain communications standards, and will indicate the amount of engineering knowledge and information which is required.

Anyone interested in the technical phases of television will be interested in such an accurate compilation of the past as well as current status of standards criteria.

Peter C. Goldmark
Columbia Broadcasting System, Inc.
New York, N. Y.

Electromechanical Transducers and Wave Filters, by Warren P. Mason

Published by D. Van Nostrand Company, 250 Fourth Avenue, New York, N. Y. 329 pages+3-page index+xii pages. 119 figures. 6¼×9¼ inches. Price $5.00, cloth binding.

This volume is a monumental text and reference on the subject of wave filters in general, with intensive treatment of the problems of distributed parameters, mechanical analogs of electrical parameters, and electromechanical coupling. While the treatment is self-sufficient beyond elementary knowledge of alternating-current networks, it is directed to those who already have some familiarity with the concepts peculiar to transmission lines and wave filters.

After an interesting historical outline, there is a 60-page concentrated treatment of electrical wave filters, with a brief table of the simpler types, their formulas and characteristics. Part of this section is an introduction to filters including transmission lines with their distributed constants. The principal subjects involve the analogy between electrical and mechanical systems, and the problems are treated from this point of view. Nearly half of the space is devoted to an excellent treatment of acoustic waves and devices such as telephone receivers, horns, and loudspeakers. The final section is devoted to the field in which the author ranks highest as a specialist, the use of quartz crystals in wave filters to secure great selectivity and frequency stability.

Harold A. Wheeler
Hazeltine Electronics Corporation
Little Neck, L. I., N. Y.

Electronics, by Jacob Millman and Samuel Seeley

Published by the McGraw-Hill Book Company, 330 West 42 Street, New York, N. Y., 1941. 689 pages+5-page appendix+27-page index+xxi pages. 425 figures. 6¼×9¼ inches. Price, $5.00.

Probably the most difficult problem in teaching electronics to engineering students is that of attaining a proper balance between emphasis on the fundamental physical principles on which the operation of electronic devices depends and emphasis on the use of electronic devices in practical engineering circuits.

The authors of this book have attempted, with considerable success, to reach such a balance. They begin their treatment at the level of fundamentals, and carry it through to discussions in the field of useful engineering practice.

The introduction is followed by an unusually good coverage of the behavior of electron beams under the influence of electric and magnetic fields, that is, cathode rays. The subsequent discussion of the behavior of electrons in metals and of electronic surface phenomena is also very good, and differs from the great majority of similar texts in that it tells the story from the beginning. The discussion of space-charge-limited current in diodes, triodes, and pentodes follows the conventional pattern fairly closely.

The treatment of gaseous conducting principles starts with two chapters on the fundamental physics of conducting gases, one having to do with kinetic theory, the other with energy level diagrams and excitation and ionization processes. The subsequent chapter on electrical discharges in gases follows the pattern of treatment customary among physicists. The discussion of commercial gas tubes, which outlines the ways in which the various fundamental physical principles are employed, is of necessity chiefly descriptive in nature.

The three chapters having to do with gas-tube rectifier circuits, including grid-control techniques, ignitron control, and filters, are very well planned, and constitute one of the best parts of the text.

The five chapters on circuit properties and uses of high-vacuum tubes cover equivalent alternating-current-circuit methods of analysis very well. The treatment of feedback is simple, direct, and covers the subject effectively without too much elaboration.

The authors purposely omit treatment of oscillators, modulators, detectors, etc., as being better suited to books or courses devoted definitely to the communication arts.

Very little attention is paid to the industrially important subject of transient behavior of electronic circuits. The text phraseology of the book as a whole seems a little wordy, and mathematical manipulations of circuit relations are in some cases carried further than is necessary to illustrate principles involved. Ultra-high-frequency principles and techniques are not discussed.

In order to use this book intelligently a student must start with a good knowledge of basic physics, but no advanced physics background is necessary. He must, however, have a good background in both direct-current- and alternating-current-circuit theory, including familiarity with the use of the j operator.

The book is pleasing to this reviewer in that it treats electronics as a subject requiring thorough analytical study, on a level with advanced alternating-current-circuit theory. Its whole pattern implies that an electrical engineer must be expected to acquire as thorough a working knowledge of fundamental electronic principles as he does of fundamental electric-circuit principles. Too many books on electronics either try to side-step or apologize for this necessity, and it is pleasing to find one that does neither. This book should prove to be a very useful contribution among texts in its field.

W. G. Dow
University of Michigan
Ann Arbor, Mich.

Experimental Electronics, by Ralph H. Müller, R. L. Garman, and M. E. Droz

Published by Prentice-Hall, 70 Fifth Avenue, New York, N. Y. 322 pages+8-page index+xv pages. 177 figures. 6¼×9 inches. Price, $4.65.

A series of experiments suitable for familiarizing newcomers to the field of electronics with the characteristics and noncommunications applications of commercial electron tubes is given in this book. Sufficient explanation is included to enable the student to understand how the tubes function, how the circuits operate, and how to select the component parts needed to make satisfactory apparatus. The important results which are to be expected from the tests are presented in the form of curves and data, so that they are available for reference.

The book includes descriptions of most-used small vacuum tubes, gas-filled tubes, cathode-ray tubes, and photoelectric devices. Among the many applications which are considered are voltage-stabilized power supplies, time-delay relay circuits, equipment for measuring small currents and voltages, photoelectric photometers, apparatus for counting articles, negative-feedback amplifiers, beat-frequency oscillators, and deflection circuits for cathode-ray tubes. The title of the book, "Experimental Electronics," is much broader than the scope of its contents. Physicists doing experimental work in such fields as electron-emission phenomena, electron optics, electron acceleration, gaseous discharges, or electron-tube design will not find discussions of their specialties.

The text is clearly written and the figures numerous and well drawn. The chapters on photoelectric cells and their applications (pages 51 to 85 and 205 to 235) are unusually well done; they contain a wealth of practical information. Throughout the book there are some typographical errors, which are easily recognized. Somewhat more obscure are the connections to the lower end of C and R_1, in Figs. 4 to 16. On page 11, the statement that laminated iron cores "Do not work satisfactorily at high frequencies, since the iron becomes saturated at very low current densities" may be viewed with suspicion; on page 118 "space charge of the electrodes" should refer to electrons, instead. However, mention of these points should not be allowed to confuse the over-all impression that the material is very well presented.

The book is recommended as the basis for a laboratory course in electronics, for students with some knowledge of physics. Professional laboratory workers, even those familiar with some of the applications of electron tubes, will find it a handy tabulation of ways to make tubes do the work, and a source of information about the proper values of resistance, capacitance, inductance, and voltage to use in circuits they assemble. The general reader will find that the continuity is sufficient for easy reading, and that he can obtain considerable practical information without performing all the experiments.

Harley Iams
Radio Corporation of America
New York, N. Y.

Gaseous Conductors, Theory and Engineering Applications, by James Dillon Cobine

Published 1941 by the McGraw-Hill Book Company, Inc., 330 West 42 Street. New York, N. Y., 593 pages+12-page index+xix pages. 354 figures. 6¼×9¼ inches. Price, $5.50.

This is a book particularly appreciated by the physicist as well as by the electrical engineer and is unquestionably one of the best texts that has been offered on this general subject. While written with the primary object of providing an engineering text in the field of gaseous conduction, Professor Cobine has seen fit to include a remarkably well-developed though concise account of the physics of electron and positive-ion production. The introductory chapters devoted to a résumé of the Kinetic Theory of Gases, Motion of Ions and Electrons, Atomic Structure and Radiation, Ionization and Deionization, and the Emission of Electrons and Ions by Solids are avowedly treated from the "classical" standpoint because of the author's belief that a group of engineering students are the better able to grasp the concepts involved. This position is no doubt well founded but the omission of the theories of electron emission based upon the Fermi-Dirac statistics is a regrettable consequence of this approach, since the student is thereby not informed of the inadequacies of the older method in many fields perhaps not directly concerned with gaseous conduction.

Considerable space is, of course, devoted to a discussion of the consequences of space charge, the applicability to ions of both signs being particularly stressed, a point which is all too frequently not appreciated by the student. After a treatment of plasma and probe theory, the author attacks the problem of cumulative ionization and spark breakdown. The important effect of metastable atoms in contributing to the formation of a glow discharge is acknowledged and the possibility is mentioned on several occasions although recent contributions in the literature have been overlooked.

The treatments of the glow discharge, corona, and the electric arc are unusually stimulating chapters in this book. The author possesses the happy faculty of illustrating the physical effect by example in such fashion as to make clear the practical application of these chapters. Lack of definition of terms is too often the stumbling block over which an otherwise clear account falls. Professor Cobine is particularly careful to avoid this danger. The conflicting theories which attempt to explain the transition from a glow discharge to an arc are mentioned but no definite conclusion is drawn. The student should thereby be encouraged to set about forming his own opinion.

How many texts leave one with the impression that the answer to everything has been obtained!

The latter third of the book is devoted to an explanation of the action of such devices as gas rectifiers, grid-controlled rectifiers, circuit breakers, and gas-filled lamps. The readers of this journal might wish that the treatment of grid-controlled rectifiers had been more extensive, but it must be remembered that the text is a general one and extensive treatment of specific phases of the subject must be found in articles or texts of more limited scopes. A whole chapter is however devoted to the cathode-ray oscillograph. For this to be of real value to the student supplementing the text with experimental work this chapter should be studied earlier than indicated by its position at the end of the book. One would readily admit that the cathode-ray oscillograph is a *sine qua non* in the study of gaseous discharges. Several tables of relevant data and experiments complete a work which is a welcome contribution to the subject of gaseous conduction.

Dayton Ulrey
RCA Manufacturing Company
Harrison, N. J.

A Guide to Cathode Ray Patterns, by Merwyn Bly

Published by John Wiley and Sons, Inc., 440 Fourth Ave., New York, N. Y. 39+vii pages. 185 figures. 8¼×11 inches. Price, $1.50.

This manual shows the distinctive features of typical cathode-ray diagrams that result in common laboratory and test-bench experimental projects that require the use of an oscillograph. Each of the 185 reproductions listed is provided with a concise caption which describes the conditions under which it was produced. It may be used as a laboratory guide for students, service men, and others in getting acquainted with an oscillograph.

There are several pages devoted to a simple discussion of graphic analysis of some of the diagrams. A few patterns are shown that occur when nonlinear sweeps, false pickups, stray fields, and other distortional conditions produce patterns that differ widely from the simple forms that are usually expected. It is considered by this reviewer that too little attention is paid to the analysis of these abnormal patterns or to improvements in the setup so that the oscillograms become more regular.

R. R. Batcher
Hollis, L. I., N. Y.

The Mathematics of Wireless, by Ralph Stranger

Published by the Chemical Publishing Company, 234 King St., Brooklyn, N. Y. 210 pages+5-page index. 113 figures. 5¾×8¾ inches. (Completely revised and enlarged as the first American edition.) Price $3.00.

This book has been written for those who are deterred from reading technical books by a lack of familiarity with the language of mathematical formulas and graphs. The illustrative material relates to electrical circuits and the simpler aspects of radio applications; hence the title. This fact, however, in no wise limits the usefulness of the book, which is fundamentally an introduction to mathematics. The treatment advances in a logical sequence from arithmetic to algebra, geometry, trigonometry, calculus, and logarithms. A chapter, beautifully illustrated, is devoted to the use of the slide rule.

The author is an electrical engineer with a wide experience in teaching in the London evening technical institutes. This experience is reflected in the easy, colloquial style of the text, and in the clear and attractive presentation of the material. No claim is, of course, made to completeness of treatment of any of these branches of mathematics. The author is at pains, throughout, to encourage his readers to further study, and to suggest textbooks to this end. In the attempt to convince the reader that mathematics is not the repellent subject he has supposed, the author has been particularly successful.

Frederick W. Grover
Union College
Schenectady, N. Y.

American Standard Definitions of Electrical Terms

Published by the American Institute of Electrical Engineers, 33 West 39 Street, New York, N. Y. 254 pages+57-page index. 3 figures. 8×11 inches. Price, $1.00.

This book embodies the results of over twelve years of effort on the part of the American Standards Association's "Sectional Committee on Definitions of Electrical Terms."

Organized in 1928 under the sponsorship of the American Institute of Electrical Engineers, this committee of forty-six members represented thirty-four organizations operated with eighteen working subcommittees involving about one hundred twenty persons. It has been estimated that, including assistance secured from many nonmember experts, over three hundred men have contributed, reflecting the interests of national engineering, scientific and professional societies, trade associations, government departments, and miscellaneous groups.

This project was initiated as a sort of "Supreme Court" to gather together in one glossary definitions of technical terms used in electrical engineering theretofore scattered in many separate places, to originate new definitions, and, more important, to correlate and unify definitions and terms in existing standards. One of the natural consequences was the generalizing of many definitions so that different specific interpretations in particular applications would be included as far as feasible. Another was the elimination of duplication so that a definition is given in only one place with a cross reference where the identical definition appears in some other group or section. In those instances where more than one term is in use for the same concept the preferred term is given in bold-face type with synonyms in light-face type, deprecated synonyms being footnoted. Many definitions are followed by helpful amplifying notes in small type.

The contents are classified into nineteen groups covering general and fundamental terms and the fields of rotating machinery; transformers, regulators, reactors and rectifiers; switching equipment; control equipment; instruments, meters and meter testing; generation, transmission, and distribution; transportation; electromechanical applications; electric welding and cutting; illumination; electrochemistry and electrometallurgy; electrocommunication; electronics; radiology, electrobiology including electrotherapeutics; and miscellaneous. The classification and numbering system follows that adopted in 1927 by the International Electrotechnical Commission's Advisory Committee on Nomenclature and was employed in the international vocabulary of some eighteen hundred and sixty terms issued in 1938.

This important and well-indexed volume does not purport to include all terms in usage. The emphasis has been given to terms in greatest use justifying treatment from the electrical standardization viewpoint. Widespread use of this vocabulary by all engineers and students in the radio field, and particularly by authors and writers of technical papers, books, specifications, and instruction manuals should bring valuable benefits to both the individual and the whole engineering profession in the direction of stabilization of nomenclature and should also develop viewpoints of much assistance to those that will carry this work forward in the future. This new American Standard ought to be of value to the general public because it constitutes an extension of the function of the recognized dictionaries into specialized fields not hitherto covered.

Haraden Pratt
Mackay Radio and Telegraph Co.
New York, N. Y.

Introduction to Electricity and Optics, by Nathaniel H. Frank

Published 1940 by the McGraw-Hill Book Company, 330 West 42 Street, New York, N. Y. 387 pages+10-page index+xii pages. 240 figures. 6½×9½ inches. Price, $3.00.

With the growing interest in ultra-high-frequency electromagnetic waves and in the electron microscope, Frank's "Introduction to Electricity and Optics" is most timely for it provides the necessary foundation in basic principles. It was written for second-year students specializing in physics or electrical engineering, but it also will be particularly useful as a reference for advanced students and practicing radio engineers. I consider it an excellent book. Is is unusually free from ambiguities. The presentation is characterized by simplicity, thoroughness, and precisely formulated principles. The author has anticipated the student's troubles and has provided the necessary detail to give him a thorough understanding of the subject. He shows the advantage of certain methods of solving problems over others. The illustrative problems have been selected with care and, where approximations have been made in the preliminary consideration, they are always clearly indicated.

The chapter on "Dispersion and Scattering," which extends the basic ideas developed for the electrostatic behavior of dielectrics to the case of fields varying with time, is particularly good. This explanation is based on the theory that polarization of a dielectric by an electrostatic field results from the orientation of the permanent molecular dipoles and from the atomic dipole moments induced by the field. As the frequency is increased the contribution of the permanent dipoles to the dielectric constant (or index of refraction) decreases on account of their extremely large mass as compared to the electronic mass until finally the dielectric constant depends only on the induced atomic dipoles. The anomalous behavior of the dielectric at certain frequencies is thus explained.

The author is to be commended for the very satisfactory way he has harmonized the interests of those interested primarily in high-frequency radio phenomena and those interested primarily in optical phenomena.

H. M. Turner
Yale University
New Haven, Conn.

The Radio Amateur's Handbook, Twentieth (1943) Edition, by the Headquarters Staff of the A.R.R.L.

Published by the American Radio Relay League, Inc., West Hartford, Conn., 592 pages, including a 103-page catalog section and a 9-page topical index. 552 photographs or diagrams and numerous charts and tables. Price, paper bound, $1.00 in continental U.S.A., $1.50 elsewhere; buckram bound, $2.50.

"Someday the war will be over. . . ."
"Someday we'll be on the air again."

And in preparation for that day, the A.R.R.L. continues its policy of publishing, annually, the Radio Amateur's Handbook. The current edition is much like its recent predecessors. It contains two chapters on fundamentals, an eight-chapter section on principles and design, a ten-chapter section on construction and data, and two concluding chapters on operating practices.

Characteristic of the Handbook is its generous use of photographs showing construction details. These, with complete lists of parts, convey a great amount of design information with minimum requirements as to exact duplication of parts or skill in blueprint reading.

A short section on microwave oscillators has been added, and the seven-page chapter on emergency equipment has grown up to be fifty pages on War Emergency Radio Service.

The Handbook will continue to be a much-used reference, not only among amateurs but among professionals, including those who borrow the tools and techniques of radio for quite different purposes.

E. B. Ferrell
Bell Telephone Laboratories, Inc.
New York, N. Y.

Contributors

Sir Noel Ashbridge

Sir Noel Ashbridge (F'38) was born on December 10, 1889, at London, England. He received the B.S. degree in 1911 from London University and his engineering training with Yarrow and Company, Ltd., and the British Thomson-Houston Company, Ltd. During 1914–1919 he served in the Royal Fusiliers and the Royal Engineers. He was six years with Marconi's at the Writtle Experimental Station. In 1926, Sir Noel joined the British Broadcasting Corporation as assistant chief engineer becoming chief engineer in 1929, and Controller of Engineering 1935.

He is president of the Institution of Electrical Engineers and a member of the Radio Research Board. In 1934 he was a member of the Television Committee and in 1935, the Television Advisory Committee. He was created a knight in 1935.

He is the author of various technical and scientific papers and in 1931 published "The Acoustical Problem of Broadcasting Studios." In 1923, with R. D. Bangay, Sir Noel published "Wireless Valve Receivers and Circuits." He is a member of the Institution of Civil Engineers, member of the Institution of Electrical Engineers, and a Knight of the Royal Order of Dannebrog (Danish).

❖

Charles W. Finnigan (A'35) was born on August 31, 1913, at Baltimore, Maryland. He received the B.S. degree in electrical engineering from the Massachusetts Institute of Technology in 1934. During 1935–1936, Mr. Finnigan was in the production development engineering department of the Philco Radio and Television Corporation, and from 1937 to 1941, he was a laboratory engineer at the RCA License Laboratories. Since 1941, he has been a radio engineer with the Stromberg-Carlson Telephone Manufacturing Company.

Charles W. Finnigan

❖

Dudley E. Foster (A'26-M'37) was born at Newark, New Jersey, on December 12, 1900. He was graduated from Cornell University in 1922 with the E.E. degree. Following his graduation he became associated with the Electrical Alloy Company and Driver-Harris Company. In 1925 he joined the Malone-Lemmon Products Company and the next year became chief engineer of the Case Electric Company. Two years later that company was merged with the United States Radio and Television Company and soon thereafter Mr. Foster was promoted to chief engineer.

Dudley E. Foster

In 1933 he became chief radio engineer of the General Household Utilities Company and from 1934 to 1941 he was division engineer in the RCA License Laboratory. He was also a lecturer in television engineering in the Graduate School of Stevens Institute of Technology. Mr. Foster then spent a year in Canada as executive vice president and technical director of Rogers Majestic, Limited. He is now director of engineering for Majestic Radio and Television Corporation of Chicago. He is a member of Eta Kappa Nu.

❖

Edmund A. Laport (A'25-M'27) was born at Nashua, New Hampshire, on July 2, 1902. He was a commercial radio operator at KDKF, New York City, in 1921, and a receiver service engineer for the Westinghouse Electric and Manufacturing Company in 1922. In 1923, he was a laboratory assistant in the radio engineering department of the General Electric Company, working on transmitter development. From 1924 to 1932 Mr. Laport was a transmitter engineer with the Westinghouse Electrical and Manufacturing Company. He installed three high-frequency communication stations for the Chinese Ministry of Communications,

EDMUND A. LAPORT

Peking, China, in 1928, and two 50-kilowatt broadcast stations at Rome and Milan, Italy, 1929–1930 and 1932. He also installed several broadcast stations from 1 to 50 kilowatts in the United States and Canada. During 1933 and 1934 he was associated with Paul F. Godley as consulting engineer. From 1934 to 1936 he was employed as a transmission engineer for Wired Radio, Inc., working on variable and suppressed-carrier asymmetric-sideband transmission development. Since 1936 he has been a section engineer, working in high-power transmitters with the RCA Manufacturing Company at Camden, New Jersey. Mr. Laport was transferred to Montreal in December, 1938, as manager of the engineering and development engineering products division of the RCA-Victor Company, Ltd.

❖

Frank A. Record (A'40) was born on February 19, 1912, at Colorado Springs, Colorado. He received the degree of B.S. in electrical engineering from the Massachusetts Institute of Technology in 1933. During 1933 and 1934 he was an assistant engineer at the Hygrade Sylvania radio-tube plant at Salem, Massachusetts. From 1934 to 1939 he was associated with the Raytheon Production Corporation, first as production engineer, and later as design and development engineer. Since 1939, Mr. Record has been on the staff of the electrical engineering department of Clarkson College of Technology. During 1941–1942, he was on leave to the Radiation Laboratory at M.I.T., and is at present on leave to the Radio Research Laboratories at Harvard University.

FRANK A. RECORD

❖

John L. Stiles (A'37) was born December 21, 1907, at Dekalb Junction, New York. He received his B.S. degree in electrical engineering from Clarkson College in 1928; the M.S. degree in 1930; the E.E. degree in 1933; and a N. Y. State Professional License in 1937.

JOHN L. STILES

Progressively Mr. Stiles was graduate assistant, instructor, assistant, and now is associate professor of electrical engineering at Clarkson, having developed the communications option. His summer positions include: 1927, test work with the New York Edison Company in electrolysis, substation, and radio; 1928, with the same company and in similar work; 1929, with the Westinghouse Lamp Company at Bloomfield in lamp development; 1930, with the New York Telephone Company at Albany in the transmissions engineer's office; and, 1941, with Westinghouse Lamp Division in high-frequency research. Four summers of advanced study were spent at the Massachusetts Institute of Technology mainly in the communications option of the electrical department. On leave, Mr. Stiles served as instructor in the department of electrical engineering of New York University in 1941. He is an associate member of the American Institute of Electrical Engineers and a member of Tau Beta Pi.

❖

Harry R. Summerhayes, Jr. (A'36) was born at Schenectady, New York, on February 19, 1914. He received a B.S. degree in physics from Union College in 1935 and after a year of graduate work he received an M.S. degree in science from the same institution. Since that time he has been employed in the General Engineering Laboratory of the General Electric Company where he has been engaged in various television and radio engineering projects. Mr. Summerhayes is an associate member of Sigma Xi.

HARRY R. SUMMERHAYES

❖

R. O. Wise was born at Detroit Lakes, Minnesota, on August 9, 1905. He received a B.S. degree in electrical engineering from Iowa State College in 1926 and an M.S. degree from the same school in 1927. He then joined the technical staff of the Bell Telephone Laboratories where for a short time he was concerned with early work on television and feedback amplifiers. From 1930 to 1940 he devoted his time to studies of modulators and modulating systems for carrier telephone work. At present he is engaged in the design and development of special electronic equipment for the Armed Forces.

❖

For a biographical sketch of James Lawrence Fly, see the PROCEEDINGS for January, 1943; for W. G. Shepherd, see February, 1943; and for Frederick E. Terman, see April, 1943.



R. O. WISE

RCA

872-A/872

HALF-WAVE MERCURY-VAPOR RECTIFIER

Price $7.50

Designed for

LONGER LIFE—HIGHER PEAK EMISSION

WITH CORRESPONDINGLY LOWER TUBE DROP

While you've been busy making hard-to-replace transmitting tubes last longer on the job, RCA engineers have been losing no time in building longer potential life into the tubes that are produced. The RCA 872-A/872 Half-Wave Mercury-Vapor Rectifier offers a good example of achievements scored in this direction:

Adoption of a special alloy for the cathode base has yielded materially increased emission with correspondingly low tube drop which, in turn, has resulted in greatly improved shelf and operating life. Thermal efficiency has been greatly increased, and, therefore, the tube will withstand higher surge currents without sputtering of the cathode coating —an important factor in increasing life.

In brief, the RCA 872-A/872 of today is a stronger, sturdier tube than ever before—just as numerous other RCA Transmitting Tube types are delivering longer life and better performance as the result of progressive RCA engineering developments.

RATINGS

Filament Voltage, 5 volts

Filament Current, 7.5 amperes

Peak Inverse Voltage, 10,000 volts, max.*

Peak Plate Current, 5 amperes, max.

Average Plate Current, 1.25 amperes, max.

*For condensed-mercury temperature of 20-60° C.



TIPS ON MAKING YOUR TRANSMITTING TUBES LAST LONGER

Many valuable operation hints on making Transmitting Tubes last longer that were incorporated in previous RCA advertising have now been compiled into a handy booklet. A copy will gladly be sent upon request to RCA Mfg. Co., Commercial Engineering Section, Harrison, N. J.

RCA TRANSMITTING TUBES

PROVED IN COMMUNICATION'S MOST EXACTING APPLICATIONS

Official
U. S. Navy
photograph

Custom Designed TRANSFORMERS

Built as well as the ships on which they serve

Custom Built Transformers that meet the rigid requirements of the United States Navy have reached a new high in efficient design, sturdy construction and operating accuracy.

Waterproof-Hermetically Sealed Transformers, built to these specifications by the Chicago Transformer Corporation, not only pass the Navy Five-Cycle Salt Water Immersion Test but also other severe operating, temperature and pressure tests set up in our own laboratories.

Manufacturers of all types of Transformers up to 10 KVA.

CHICAGO TRANSFORMER CORPORATION
3501 WEST ADDISON STREET • CHICAGO

Section Meetings

Atlanta

"The WAGA Transmitter Installation," by Russ Shettler, WAGA, October 23.

Baltimore

"Crystals," by R. S. Bailey, Bendix Radio Division, Bendix Aviation Corporation, October 15.

"Industrial Broadcasting," by D. D. Halpin, Industrial Music Committee of RCA, November 19.

Boston

"German War Radio Apparatus Design," by F. S. Barton, British Air Commission, October 30.

"Conservation of Critical Materials," by H. F. Osborn, American Telephone and Telegraph Co., November 24.

Buffalo-Niagara

"The Behavior of Dielectrics Over Wide Ranges of Frequency and Temperature," by R. F. Field, October 21.

"The Application of Electronics in the Power Industry," by L. K. Yerger, November 18.

Chicago

"The Use of Counter Circuits as Frequency Dividers," by Earle Kent, C. G. Conn, Ltd., October 16.

"Plastics in the Radio Industry," by James Boyajian, General Television, October 16.

"What Lies Ahead in Short Waves," by W. A. Edson, Illinois Institute of Technology; J. E. Brown and R. Di Cola, Zenith Radio Corporation, November 13.

Cincinnati

"The General Electric Wide-Band Oscilloscope," by E. D. Cook, General Electric Company, October 20.

"Communications Facilities of United Air Lines," by C. A. Petry, United Air Lines, November 10.

"Africa, the Prize of Europe," by C. B. Hoffman, University of Cincinnati, November 10.

Cleveland

"Recent Developments in Powdered Iron Cores," by Mr. Andrews, Stackpole Carbon Company, September 22.

"The Design of a Wide-Band Oscilloscope," by E. D. Cook, General Electric Company, October 22.

Dallas-Fort Worth

Open Discussion led by Chairman Kimsey, October 23.

Detroit

"Wide-Band Oscilloscope," by E. D. Cook, General Electric Company, October 21.

"Measurement of Soil Moisture," by G. J. Bouyoucos, Michigan State College, October 21.

"Broadcast and Commercial Recording Technique," by Andrew Friedenthal, WJR, November 20.

(Continued on page xxiv)

U. S. Navy Official Photo

Minus Sound Effects

If you were receiving radio broadcasts from men in the midst of ear-splitting battle noises, you'd hear crisp speech undistorted by background sound effects.

Electro-Voice Microphones, in military service, are helping to make it possible. Similar microphones, designed to achieve such results, will be available for specific commercial applications . . . after our wartime job is done.

Electro-Voice MICROPHONES

ELECTRO-VOICE MANUFACTURING CO., INC. 1239 SOUTH BEND AVENUE, SOUTH BEND, INDIANA

Need Intelligible Communications?
D
A
B
C
Use a
TURNER
Microphone
TURNER Microphones are specifically designed and engineered to faithfully reproduce gradations of volume, amplifying only the vibrations received by the diaphragm, without adding any of the harmonics.
A. Turner Cardioid 101
Here's the unit that stymies all background noises. The 2-element generator produces true cardioid characteristics and offers the best features of both the dynamic and velocity. Where the going is tough and acoustic conditions practically impossible, a Turner Cardioid can handle the job. Available in Standard, De Luxe and Broadcast Models.
B. Turner U9-S Multiflex
This ONE Turner unit offers your choice of 4 impedances-50, 200 or 500 ohms or hi-impedance, simply by twisting the switch. A dynamic microphone that's free from peaks and holes from 40 to 9000 cycles. Be sure you can handle ANY job with Turner U9-S.
C. Turner 211 Dynamic
Utilization of a new type magnet structure and acoustic network permits outstanding performance characteristics with the 211. High frequency range has been extended and extreme lows raised, to compensate for over-all deficiencies in loud speaker systems.
D. Turner Han-D
Hold it, hang it, or mount it on standard desk or floor stand, this Turner is HAN-D. Positive contact slide switch permits off-on operation. Will not blast from close speaking. Crystal or Dynamic.
If You Have a Priority Rating
WRITE, explaining your communications problems and we can help you select the Turner Microphone best suited to your needs. Also, information on how to make your present Turner Microphones and Equipment give longer, better service.
FREE Turner Microphone Catalog, with complete information and prices on Turner Microphones and Equipment. Write:
Crystals Licensed Under Patents of The Brush Development Co.
THE TURNER CO.
CEDAR RAPIDS, IOWA

Section Meetings

(Continued from page xxii)

EMPORIUM

"Wide-Band Oscilloscope," by E. D. Cook, General Electric Company, October 19.

Business Meeting and motion pictures, November 19.

LOS ANGELES

"Development and Application of Radio Devices as Applied to Flood Control in Southern California," M. E. Kennedy, Los Angeles County Flood Control, October 20.

"The Installation of a 10,000-Watt Transmitter Plant and a Three-Element Directional Array," by L. C. Sigmon, KMPC, November 24.

"The Need for Radio Engineers in the United States Army," by A. H. Harwood, Los Angeles Officer Procurement District, War Department, November 24.

MONTREAL

"A New Type of Practical Distortion Meter," by J. E. Hayes, Canadian Broadcasting Corporation, October 14.

"New Audio Equipment for CJRC—Winnipeg," by F. R. Quance, RCA Victor Company, Ltd., October 14.

"Methods of Technical Instruction in the Royal Canadian Air Force," R. K. Patrick, Royal Canadian Air Force, November 14.

"German War Radio Apparatus Design," by F. S. Barton, British Air Commission, November 25.

PHILADELPHIA

"Technical Problems of Wartime Broadcast Station Operation," by H. Frazier, National Association of Broadcasters, November 5.

"Power-Tube Operation and Conservation at Station WOR," by H. E. Mendenhall, Bell Telephone Laboratories, and G. Robinson, WOR, November 5.

PITTSBURGH

"Engineering Features of Carrier-Current Applications," by J. G. McKinley, West Penn Power Company, September 14.

"Discussion of National Association of Broadcasters Recording and Reproducing Standards," by Roland Lynn, National Broadcasting Company, October 12.

"Future Sources of Power," by C. C. Furnas, Curtis Wright Corporation, November 10.

PORTLAND

"Video Coupling Units," by A. V. Eastman, University of Washington, October 23.

ST. LOUIS

"Radio-Interference Prevention and Location on Power Systems," by S. R. Luben, Rural Electrification Administration, September 30.

"Priorities in the Communications Industry," by R. McCarty, War Production Board, October 28.

(Continued on page xxvi)

RELAYS

FROM GUN BLAST HEAT TO ARCTIC COLD

★ Smothered in dust . . . seared by gun blast heat . . . shrouded in fog . . . gripped by stratosphere cold . . . shaken by blasts of bomb and shell . . . these are daily incidents in the life of a relay. Under these conditions Relays by Guardian have already "proved their metal."

THE SERIES 195 RELAY weighs less than an ounce! But don't let its tiny size fool you. It shrugs off the most severe vibrations likely to be encountered in aircraft. And it's especially adaptable to jobs where space as well as weight is at a premium. It's about wrist watch size in length and width—and not a great deal thicker.

SERIES 345 RELAY. A radio relay for use in aircraft. Maximum contact combination of three pole, double throw, combined with large coil winding area makes this a highly efficient relay in compact space.

While thinking, building and engineering the tools of war today, Guardian is also looking ahead to peacetime applications of Relays, Solenoids, Electrical Controls of all kinds. If you are planning for the future too, write us—our war-time experience can help you build better peacetime products.



Series 195 Relay. *One of the smallest relays made. Write for new Bulletin.*

Series 345 Relay. *For radio aircraft use. Write for new Bulletin.*

GUARDIAN ELECTRIC

1628 WEST WALNUT STREET CHICAGO, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN WAR INDUSTRY

ARMY
E
NAVY
"FROM that high resolve was born the Army-Navy Production Award which stands today as our fighting forces' joint recognition of exceptional performance on the production front . . . of the determined persevering, unbeatable spirit which can be satisfied only by achieving today what yesterday seemed impossible!"
We're sincerely proud of our award —its significance will always be our goal.
BLILEY
FREQUENCY CONTROL
BLILEY ELECTRIC COMPANY . . . ERIE, PA.
Bliley Crystals

Section Meetings

(Continued from page xxiv)

"Use of High-Frequency Currents in Treatment of Human Body," by W. H. V. Hoefer, Lutheran Hospital, November 24.

SAN FRANCISCO

"The Electron Miscroscope," by L. Marton, Stanford University, November 11.

TORONTO

"Oil-Filled Condensers," by W. S. Franklin, John E. Fast and Company, November 23.

TWIN CITIES

"Requirements of Radio Men for Navy Personnel," W. W. Hall, Office of Naval Officer Procurement, October 28.

"Recording Theory and Practice," by K. L. Sueker, WCCO, and Midwest Transcriptions, Inc., October 28.

"Some Distinctive Characteristics of Micro Radio Waves," by M. Phillips, Graduate School, University of Minnesota, November 23.

WASHINGTON

"Wire and Radio Circuits for Network Broadcasting and Communications," by A. H. Petersen, Columbia Broadcasting System, October 12.

Membership

The following indicated admissions and transfer of memberships have been approved by the Admissions Committee. Objections to any of these should reach the Institute office by not later than January 31, 1943.

Transfer to Member

Dinger, H. E., 1301—46 St., S.E., Washington, D. C.

Dudley, B., 235 W. 71 St., New York, N. Y.

Ferrill, T. M., Jr., 6 Clare Rd., East Hempstead, L. I., N. Y.

Knight, J. B., U. S. Navy Underwater Sound Laboratory, Ft. Trumbull, New London, Conn.

Radius, C., 126 W. Hudson Ave., Englewood, N. J.

Sparling, A. G., 622 W. 20 St., Spokane, Wash.

Terrey, C. J., 1175 Bushwick Ave., Brooklyn, N. Y.

Zender, R. G., 1751 N. Western Ave., Chicago, Ill.

Admission to Member

Cose, J. A., 1165 Loraine Ave., Plainfield, N. J.

Davis, D. M., Zenith Radio Corporation, 6001 Dickens Ave., Chicago, Ill.

Innes-Crump, J. E., No. 3 Training Command, R.C.A.F., Montreal, Que., Canada

(Continued on page xxviii)

STANCOR

PROFESSIONAL SERIES

PLATE TRANSFORMERS

The best of insulating and conducting materials scientifically applied thruout the coil afford generous margins of safety against electrical failure.

Phenolic side panels with heavy duty insulators insure excellent dielectric characteristics and easy accessibility.

Cast semi steel end bells provide a rugged mounting and a symmetrically finished appearance.

Accurately processed high grade silicon steel stampings, carefully laminated, result in an efficient and low loss core structure.

Vacuum impregnation of coils and thorough penetration of potting compounds furnish complete protection against the effects of humidity and time.

Rigid inspection of materials and progressive testing thruout fabrication result in a quality product.

STANDARD TRANSFORMER CORPORATION

1500 NORTH HALSTED STREET • CHICAGO

STANCOR

Built like a Battleship!

Creators and Makers of
ACCURATE RESISTORS—SWITCHES—SPECIAL EQUIPMENT AND
SPECIAL MEASURING APPARATUS FOR PRODUCTION AND
ROUTINE TESTING OF ELECTRICAL EQUIPMENT ON MILITARY AIR-
CRAFT...SHIPS...VEHICLES...ARMAMENT...AND WEAPONS
SHALLCROSS SWITCHES
Are constructed of the finest materials available. Many designs may be obtained having solid, fine silver contacts, and ceramic or phenolic insulation. Where essential War Production dictates the use of switches that are rugged and dependable, send your specifications to Shallcross, Dept. C23.
MEMBER
SAMA
SHALLCROSS MFG. CO.
COLLINGDALE, PENNA.

Membership

(Continued from page xxvi)

Maedel, G. F., 593 E. 38 St., Brooklyn, N. Y.
Meixell, O. S., 19 Pease Ave., Verona, N. J.
Omberg, A. C., 4112 Fourth St., Arlington, Va.
Sheer, C., 189-12—43 Rd., Flushing, L. I., N. Y.
Wenger, W. D., 1480 Glenwood, Sylvan Village, Pontiac, Mich.

The following indicated admissions and transfers of memberships were approved on December 2, 1942.

Transfer to Member

Bailey, A. B., Bell Telephone Laboratories, 180 Varick St., New York, N. Y.
Griffiths, H. V., British Broadcasting Corporation, Nr. Westerham, Kent., England
Stobbe, J. A., 63 Wall St., New York, N. Y.

Admission to Member

Bayles, J. C., 406 Lenox Place, South Orange, N. J.
Fisher, S. T., Box 64, Station H, Montreal, Que., Canada
Hathaway, D. L., Box 930, Casper, Wyo.

Admission to Associate

Adams, R. J., 3110 Massachusetts Ave., S.E., Benning Station, Washington, D. C.
Anderson, E. P., 730 S.W. Oak, Portland, Ore.
Auerbach, M., 5201A Montour St., Philadelphia, Pa.
Baum, R. F., Windsor Hotel, 305 Academy St., Jersey City, N. J.
Benjamin, R., 59 W. Cromwell Rd., London, S.W. 5, England
Benowitz, H. S., 1301 Seneca Ave., Bronx, N. Y.
Bernes, B., Box 32C7, Route 1, Chula Vista, Calif.
Bloomer, A., A.I.D. Office, Ericsson Telephones, Ltd., Beeston, Notts., England
Bondy, J. O., 10 Bush Ave., Newburgh, N. Y.
Boothe, A. M., 384 Probasco St., Clifton, Cincinnati, Ohio
Brandt, R., Sylvania Electric Products, Inc., Emporium, Pa.
Brogdon, L. C., 619 Forrest Ave., Chattanooga, Tenn.
Brownell, H. R., 426 Hudson St., New York, N. Y.
Buchtenkirch, A. J., Powers Electronic and Communications Company, New St., Glen Cove, L. I., N. Y.
Burwell, A. C., Jr., Sylvania Electric Products, Inc., Emporium, Pa.
Carroll, C. F., 7009 Fordham Court, College Park, Md.
Carsner, F. J., 664 Spazier Ave., Pacific Gove, Calif.
Clapper, A. B., 115 Ellison St., Paterson, N. J.
Contreras, M. J. A., YMCA, 215 W. 23 St., New York, N. Y.

(Continued on page xxxii)

PRECISION POWER TUBES FOR EVERY PURPOSE MADE BY

UNITED

Skills in Electronics

When the war ends, there will be a phenomenal expansion in the peace-time use of electronics. Today—while the war absorbs the tube output—try to fix in your mind this unique source for tubes which you will seek tomorrow:

Its name: UNITED. Its organization: a group of eminent engineers and technicians, uniting their highly specialized skills. Its product: power tubes, unsurpassed in precision, for every electronic requirement including radio communication, physiotherapy and industrial control. Its standard: power tubes that consistently attain the highest record in every test of performance. Remember the name "United."

JOIN UP
U.S. SIGNAL CORPS
SKILL AND COURAGE COUNT

UNITED ELECTRONICS COMPANY

NEWARK, NEW JERSEY

. . . and we have earned them the hard way too, majoring in electrical research thruout our 47 years . . . Thordarson Engineers have always been ahead of new developments . . . that is why you will find, both in military and civilian use, engineers specifying Thordarson transformers for that vital job where unfailing performance is paramount.

Submit your transformer problems to Thordarson Engineers . . . they know how to solve them.

THORDARSON

ELECTRIC MFG. CO.
500 WEST HURON STREET CHICAGO, ILL., U. S. A.

Transformer Specialists Since 1895

Membership

(Continued from page xxviii)

Crawley, J. B., 2165 Winchester Ave., Ashland, Ky.
Currier, M. G., Box 412, Morristown, N. J.
Darden, R. R., Jr., 197 Acadia Terr., Fairfield, Ala.
Day, F. H., R.F.D. 2, Superior, Neb.
DeCourcey, R. V., 2119 H St., Washington, D. C.
Deniz, R., Viamonte 1332, Buenos Aires, Argentina
Everett, J. E., 40-26 Main Ave., Douglaston, L. I., N. Y.
Femenias, L. H., Calle Cuevas No. 960, Santiago, Chile
Fletcher, B. W., 5010—56 Ave., Rogers, Hyattsville, Md.
Fournier, R., 1008 Allard Ave., Verdun, Que., Canada
Gable, N. P., 208 South Broad St., Emporium, Pa.
Gaenzle, J. B., 310 W. Fifth St., Emporium, Pa.
Gibson, G. B., 2108—31 St., S.E., Washington, D. C.
Haggerty, M. B., Police Department, Gainesville, Fla.
Headley, C. B., 184 William St., East Orange, N. J.
Heitner, A. J., 208 S. Broad St,, Emporium, Pa.
Hogue, W. T., 1904 W. Third St., Grand Island, Neb.
Hunt, W. V., Park Manor Hotel, 5560 Pershing Ave., St. Louis, Mo.
Imerson, H. E., 657 Oakdale, Chicago, Ill.
Johnson, L., 533 Kinnaird Ave., Fort Wayne, Ind.
Kaplan, M., 1115 Sterling Pl., Booklyn, N. Y.
Karel, G. M., 21 W. 101 St., New York, N. Y.
Keen, C. D., 529 Robinson Pl., Shreveport, La.
Kimmel, L. D., 348 S. Harvard Ave., Villa Park, Ill.
Kinsburg, B. J., Rm. 1304, 180 Varick St., New York, N. Y.
Knieriem, R. A., 360 Riverside Ave., Buffalo, N. Y.
Lambert, R. L., Sylvania Electric Products, Inc., Emporium, Pa.
Landeck, J. H., 151 Norwood Ave., Long Branch, N. J.
Loughlin, J. H., Sylvania Electric Products, Inc., Emporium, Pa.
Lewis, L. L., WOI, Ames, Iowa
Lombardi, E. H., 45 Parkway Dr., Port Chester, N. Y.
Lurye, J. R., 28 W. 69 St., N. Y.
Maass, C. E., Hotel Statler, Boston, Mass.
Marzetti, E. J., General Paz 137, Temperley, F. C. S., Argentina
McConnell, T. E., A.P.O. 868, c/o Postmaster, New York, N. Y.
Melton, A., 8638—55 Rd., Elmhurst, L. I., N. Y.
Miles, I. M., 554—14 St., N.W., Atlanta, Ga.
Padgett, G. E., 118 Hawkins Ave., Somerset, Ky.
Peoples, J. E., 1954 Wellesley Rd., San Marino, Calif.
Postal, R. H., 366A Mosholu Pkway., Bronx, N. Y.
Raskind, E., 103 Gordon St., Brighton, Mass.

(Continued on page xxxiv)

It is typically American to accomplish yesterday's impossibility today!—The Raytheon research laboratory today and every day is delving into seemingly impossible Radio Electronic Tube problems.... and solving them in an incredible space of time. This unending scientific research carried on at Raytheon to aid our Armed Forces during this conflict will, when we are once more on a peacetime basis, give Raytheon tubes the advantage of these newly developed electronic principles...Your new Raytheons will be the product of the latest scientific research.
Raytheon Manufacturing Company
Waltham and Newton, Massachusetts
DEVOTED TO RESEARCH AND THE MANUFACTURE OF TUBES AND EQUIPMENT FOR THE NEW ERA OF ELECTRONICS
For military reasons the tube shown is not a new development.

QUICK DELIVERY ON CONDENSERS!

INDUSTRIAL CONDENSER CORP. through a new distribution plan enables you to secure *small lots* of condensers locally. Contact the Industrial Condenser district office nearest you:

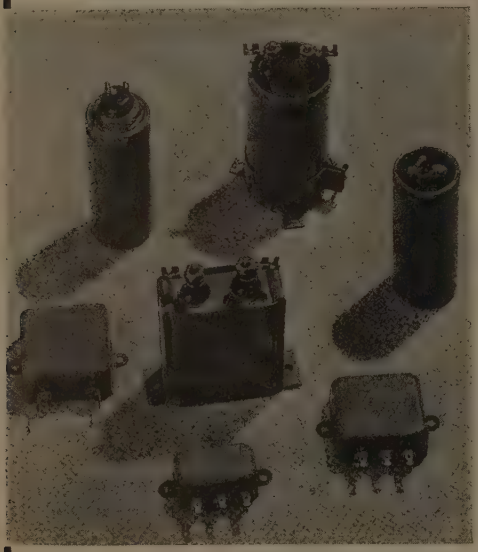

ADDRESS	TELEPHONE NO.
Box 1052 Dallas, Texas	Logan 6-1685
117 Water St. Boston, Mass.	Hancock 0200
1406 S. Grand Ave. Los Angeles, Calif.	Richmond 6161
Box 1202 Asheville, N.C.	7149-J
27 Park Place New York, N.Y.	Barclay 7-4977
Rm. 220—Medical Arts Bldg. 34th & Broadway Kansas City, Mo.	Westport 5323
1456 Waterbury Road Lakewood (Cleveland), Ohio	Academy 4932
2434 W. 22nd St. Minneapolis, Minn.	Kenwood 2833
1135 Lincoln Tower Ft. Wayne, Ind.	Anthony 5278
2016 Third Ave. Seattle, Wash.	Seneca 1088
Lutz (Tampa), Fla.	99-144
6432 Cass Ave. Detroit, Mich.	Madison 6300
401 N. Broad St. Philadelphia, Pa.	Walnut 4163
235 9th St. San Francisco Calif.	Market 4166

Engineers Attention! **Condensers immediately available from distributors stocks meet Army and Navy requirements . . . Industrial Condensers are specified where precision is vital . . . Capacitors to 150,000 volts—WRITE FOR COMPLETE NEW CATALOG.**

INDUSTRIAL CONDENSER CORP.

1725 W. NORTH AVE. CHICAGO, U.S.A.

INCCO New Process

Manufacturers of Quality Oil, Wax and Electrolytic Capacitors

Membership

(Continued from page xxxii)

Rasley, D. R., 3702 E. Pontiac St., Fort Wayne, Ind.
Rhoads, J. A., 2908 W. Santa Barbara Ave., Los Angeles, Calif.
Ringwalt, D. L., 3003 Seventh S.E., Washington, D. C.
Russell, G. D., 3517 N.W. 26 St., Oklahoma City, Okla.
Rustemeyer, G. L., 3846 Alexander St., St. Louis, Mo.
Scheibe, E. H., 144 W. Gilman St., Madison, Wis.
Seelen, H. R., 637 School La., Lancaster, Pa.
Sieve, R., 3 Lawrence Rd., Westcliffe Ext., Johannesburg, South Africa
Stabler, H. P., Thompson Physical Laboratory, Williamstown, Mass.
Stern, R. K., 114-06 Queens Blvd., Forest Hills, L. I., N. Y.
Stott, H. B., RCA Manufacturing Company, Bldg. 5, Camden, N. J.
Thomson, E. C., c/o Photoswitch, Inc., S. Canal St., Lawrence, Mass.
Trompeter, R. J., 9400 Kathlyn, Overland Station, St. Louis, Mo.
Vislisel, R. L., Box 1243, Colorado Springs, Colo.
Walker, A. P., Box 3886, Honolulu, T. H.
Ward, D. M., 78 Woodside Rd., Winchester, Mass.
White, G. R., 7340 Ethel Ave., Richmond Heights, Mo.
Williams, L. E., St. Clair Acres, Bridgeville, R.D. 2, Pa.
Wolfson, W., 876 Elsmere Pl., Bronx, N. Y.
Young, H. H., 131 Hudson Ave., Red Bank, N. J.
Young, R. A., 314 W. Fifth St., Emporium, Pa.
Young, W. R., Jr., 180 Varick St., New York, N. Y.
Zavala, J. R., Box 6, Reinosa, Tamps, Mexico

Current Literature

(Continued from page xxx)

provide up-to-date information on circuit design, in the discussion of design formulas employed in connection with band width and the speed of electrical actions. Phenomena and features in frequency modulation are described in comparison with customary amplitude modulation and in comparison with phase modulation. Price $4.00.

*ELECTRIC and MAGNETIC FIELDS. By Stephen S. Attwood, Professor of Electrical Engineering, University of Michigan • • • *John Wiley & Sons, Inc., 440 Fourth Ave., New York, N. Y.* (xiii+430 pages, 218 illustrations, 6×9¼ inches, bound in blue cloth.) This is the second revised edition to a text originally published in 1932. It gives a thorough coverage of electric and magnetic fields, with emphasis on the field point of view rather than on circuits. Field-mapping methods are clearly set forth. The revisions to the original text are extensive and bring the text up-to-date with recent developments. Price $4.65.

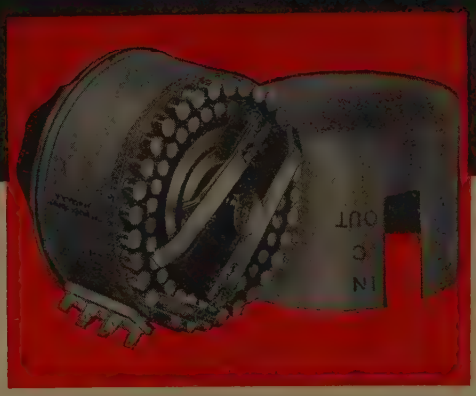

Long-Lasting

Like the giant motors of ocean-spanning Pan American Clippers, Daven products are built for a long haul. Unless Daven components are abused, they invariably outlast the original equipment in which they have been incorporated.

Such durability reduces servicing problems to a minimum and enables us to devote all of our time to the important work of supplying necessary parts and equipment to manufacturers of essential material. And they, in turn, know they can count on Daven for the most complete line of precision attenuators in the world; and for more than eighty models of laboratory test equipment.

THE DAVEN COMPANY

NEWARK NEW JERSEY

Creators and Makers of
ACCURATE RESISTORS—SWITCHES—SPECIAL EQUIPMENT AND
SPECIAL MEASURING APPARATUS FOR PRODUCTION AND
ROUTINE TESTING OF ELECTRICAL EQUIPMENT ON MILITARY AIR-
CRAFT... SHIPS... VEHICLES... ARMAMENT... AND WEAPONS
Over 40 Standard and Many Special Designs. . . . Resistance Range: 0.001 ohm to 10 megohms. . . . Accuracy: Tolerances as close as 0.05%. . . . Supplied on ceramic, metal or synthetic forms. . . . Inductive or Non-Inductive windings. . . . Wound with the alloy you specify. . . . With any insulation commercially available. . . . A variety of terminals and mounting facilities. . . . Impregnated against moisture and high humidity. . . . Address Dept. No. 23
MEMBER
SAMA
HALLCROSS MFG. CO.
COLLINGDALE, PENNA.

Section Meetings

ATLANTA

"Electronic Switching," by Professor B. J. Dasher, Georgia School of Technology, November 20, 1942.

BALTIMORE

"Behavior of Oil Films on Water" and "The Construction and Use of Electrical Instruments," Educational Sound Movies of General Electric Company, December 17, 1942.

BOSTON

"A Wide-Band Oscilloscope," by Dr. E. D. Cook, General Electric Company, December 17, 1942.

BUFFALO-NIAGARA

"The Seismograph and Its Application," by Dr. Austin McTigue, Canisius College, December 16, 1942.

CLEVELAND

"The Constant-Voltage Transformer," by C. H. Humes, Sola Engineering Company, December 12, 1942.

CONNECTICUT VALLEY

"The Micro-Lineometer," by E. F. Travis, General Electric Company, December 17, 1942.

DALLAS-FORT WORTH

"Multichannel Carrier Systems," by L. C. Starbird, Southwestern Bell Telephone Company, December 11, 1942.

DETROIT

"Wired Broadcasting as a War Moral Factor in Business and Industry," by W. J. Jory, Michigan Music Corporation, December 18, 1942.

LOS ANGELES

"Development of a Low-Frequency Time Standard," by R. G. Leitner and F. H. Gilbert, Frank Rieber Company, December 15, 1942.

MONTREAL

"A New Power-Line-Carrier Signaling Equipment," by F. A. A. Baily, Canadian Marconi Company, December 9, 1942.

PHILADELPHIA

"Treating Materials with Radio-Frequency Power," by J. P. Taylor, RCA Manufacturing Company, Inc., December 3, 1942.

Discussion of subjects important to radio engineers, Dr. L. P. Wheeler, Federal Communications Commission, January 7, 1943.

PITTSBURGH

"The Strobotron," by D. F. Shankle, University of Pittsburgh, and "Modern Methods of Radio Servicing," by W. P. Kaywood, Carnegie Institute of Technology, December 7, 1942.

ROCHESTER

"The Importance of Communications to the War Effort," by Dr. R. H. Manson, Stromberg-Carlson Telephone Manufacturing Company, December 8, 1942.

(Continued on page xx)

IRON CORES *for* 150-175 MEG.

...another example of

Stackpole Engineering Leadership



RESISTORS *(fixed)*
Carbon composition resistors up to 3 watts, all ranges —insulated or molded construction.

RESISTORS *(variable)*
A wide variety of types for every volume, tone, and sensitivity control need.

SWITCHES
Slide-operated (either indexed or momentary contact)—Rotary Index and Toggle Types.

Matching the demands of today's exacting applications, Stackpole has developed iron cores which show outstandingly favorable characteristics at frequencies as high as 150 to 175 megacycles. Combining a permeability of approximately 5 with high Q, these cores represent a big forward step in meeting the service requirements of much of the high frequency equipment now coming into widespread use.

Other Stackpole cores for fixed or variable inductance, or for station tuning, are available in a wide variety of grades and sizes for use at any frequency up to 50 megacycles. Molded from powder to match your specifications, they are noted for their uniformity. *All engineering samples are made on actual production equipment.*

Full details on any type will gladly be sent upon request. Where samples are needed, please send complete data as to size and frequency.

STACKPOLE CARBON COMPANY, ST. MARYS, PENNA.
Stackpole Products are Sold to Manufacturers Only

STACKPOLE

EVERYTHING IN CARBON BUT DIAMONDS — BRUSHES (all types for all rotating machines) — CONTACTS (all carbon, graphite and composition types — also molded rare metal contacts) — ANODES — ELECTRODES — BRAZING BLOCKS — BEARINGS — WELDING RODS, ELECTRODES AND PLATES — PIPE — PACKING, PISTON AND SEAL RINGS — RHEOSTAT PLATES AND DISCS — BRAKE LINING, etc.

HERE TRANSFORMERS *MUST* BE TOUGH!

When tanks roll into action only the toughest transformers can give the uninterrupted service so vitally essential. Transformers built to the rigid standards of the United States Army Signal Corps have the qualities necessary for constant performance under these conditions.

The Chicago Transformer Corporation has had long experience in the manufacture of transformers that meet these requirements as well as the rigorous tests that have originated in our own laboratories.

CHICAGO TRANSFORMER CORPORATION
3501 WEST ADDISON STREET • CHICAGO

Section Meetings

(Continued from page xviii)

Panel discussion of problems in production engineering (electrical), December 10, 1942.

"Christmas Optimism," by The Most Reverend J. E. Kearney, Bishop of the Rochester Diocese, Roman Catholic Church, December 15, 1942.

SAN FRANCISCO

"Interelectrode Capacitance in Vacuum Tubes: Theory, Measurement and Application," by Dr. L. T. Pockman, Heintz & Kaufman, Ltd., December 4, 1942.

ST. LOUIS

"Design and Operating Characteristics of Transformers," by W. C. Wooley, Moloney Electric Company, December 28, 1942.

TWIN CITIES

"Measurements of Audio-Frequency Systems," by C. J. Lebel, Maico Company, December 4, 1942.

WASHINGTON

"The Electron Microscope," by Dr. J. Hillier, RCA Laboratories, November 9, 1942.

"Portable Depth Recorders," by Dr. H. G. Dorsey, U. S. Coast and Geodetic Survey, December 14, 1942.

Membership

The following admissions to Associate membership were approved Jan. 6, 1943.

Affelder, C., 5853 Ferree St., Pittsburgh, Pa.
Anderson, A. W., Box 1261, Sandusky, Ohio
Anderson, J. D., Box 561, Starkville, Miss.
Bannon, J. E., 326 N. Metcalf St., Lima, Ohio
Baptiste, G. F., Box 114, Dorchester, Mass.
Barsook, E. E., 9394 Wildemere Ave., Detroit, Mich.
Bengle, L. P., 9 Summit Ave., Salem, Mass.
Bergmann, E. I., 72 Beaver St., Brooklyn, N. Y.
Brantley, W. W., 5050 McKean Ave., Philadelphia, Pa.
Brough, J. R., 161 Fifth Ave., Ottawa, Ont., Canada
Burroughs, J. D., 321 Court St., Salem, Ore.
Campbell, D., Borgfeld Lodge, Wildmere Rd., Kent, England
Carmichael, M., Irving Park Y.M.C.A., Chicago, Ill.
Cooke, S., Communications Detachment, Tuskegee, Ala.
Couch, W. M., Rt-4 Anacostia Station, D. C.
Cowilich, W. B., 4 Wood Lot Rd., Tuckahoe, N. Y.
Craig, C. E., 22 Reynold St., Alfred, N. Y.
Davidson, E. D., R.A.F. Station, Clinton, Ont., Canada
Di Nunzio, P., San Martin 379, Buenos Aires, Argentina

(Continued on page xxii)

In the Armed Services of the United Nations

—ON LAND
—ON SEA
—IN THE AIR

PREMAX

TUBULAR METAL ANTENNAS

Premax Metal Antennas are meeting the rigid requirements of the fighting forces of the Allied Nations. Send for Bulletin of Standard designs, or submit your specifications for special types of Antennas and Mountings.

Premax Products

DIVISION OF
CHISHOLM-RYDER CO. INC.
4301 Highland Ave., Niagara Falls, N.Y.

WE'VE MADE BILLIONS —and not one has loosened

THEY'RE on oil well pumps—some for twelve years.

They're standard equipment on rock drills — industry's toughest fastening problem.

They're on tanks, planes, guns—all kinds of wartime material—all kinds of peacetime equipment.

All told, billions of Elastic Stop Nuts have gone to work.

And as far as we know, not one has failed to do its job.

That job is to hold fast and stay put—come what may in the way of vibration, jar or chatter.

Of course the need for such dependable fastenings in war goods and planes is paramount. Some planes take as many as 35,000 in a single ship.

So even at our 4,000,000-a-day rate (which soon will double) the demand keeps growing.

But this constant call for more and more—to meet the exacting responsibilities of war—gives ample proof that Elastic Stop Nuts answer every need for secure locking and speedy fabrication.

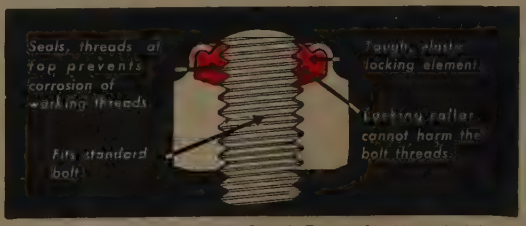

Write for folder explaining the Elastic Stop self-locking principle.

ELASTIC STOP NUT

CORPORATION OF AMERICA

2330 Vauxhall Road, Union, N. J.

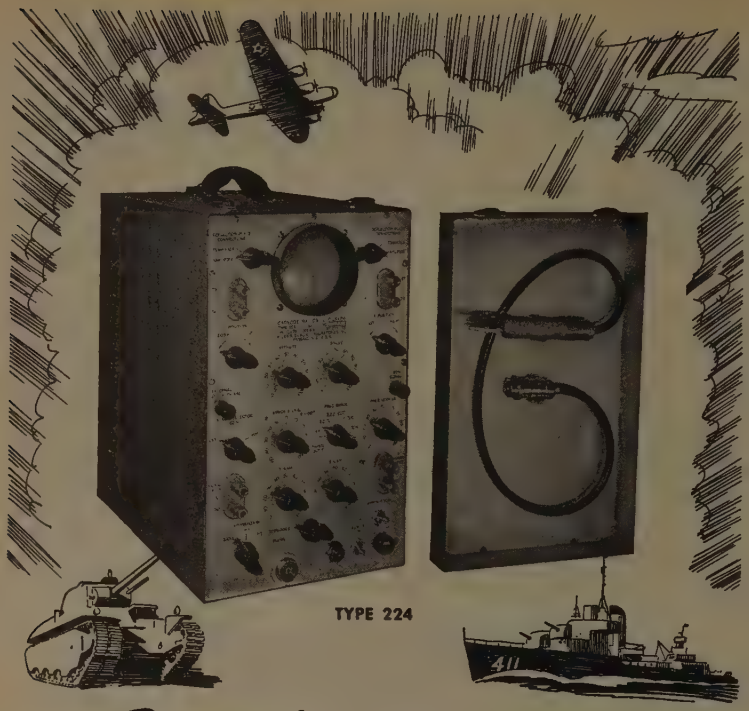

Another DuMONT War Baby

Y-axis or vertical deflection response uniform from 20 c.p.s. to 2 megacycles. Distortionless input attentuator and gain control.

Widest variety of signal input connections. Signals can be connected at the front panel directly to deflection plates of 3" cathode-ray tube when frequencies are above useful limits of amplifiers.

Y-amplifier has input connection for test probe and shielded cable, reducing input capacitance and eliminating usual stray pickup.

All high-voltage electrolytic capacitors are eliminated from circuit.

14⅛" h.; 8⅜" w.; 15⅛" d.; 49 lbs.

FREQUENCY RESPONSE TO TWO MILLION CYCLES!

★ Out of the flaming crucible of war which tries equipment as well as men's souls, comes this new DuMont Type 224 Oscillograph.

First and foremost, its wide band Y-axis amplifier permits study of signals of frequencies far beyond the range of standard oscillographs. It has a comparably faithful square and sinusoidal wave response. Second, it is a more versatile oscillograph, providing extreme variety in the application of signal to the cathode-ray tube. Third, it is housed for severe service out in the field as well as in plant or laboratory. Protective, removable cover safeguards panel and controls when not in use, especially in transit.

These and other attractive features make this war baby outstanding among oscillographs.

Write for Literature . . .

DUMONT

ALLEN B. DU MONT LABORATORIES, Inc.

Passaic • New Jersey

Cable Address: Wespexlin, New York

Membership

(Continued from page xx)

Downsbrough, G. A., 70 Boulevard, Mountain Lakes, N. J.
Evan-Jones, W., 540 Russell Hill Rd., Toronto, Ont., Canada
Farrell, F. X., 105 Tobey St., Providence, R. I.
Fox, R. H., 37 E. Greenwood Ave., Oaklyn, N. J.
Fuller, H. S., Station 3YB, Clifton Gdns., Warrnambool, Victoria, Australia
Gates, H. A., 506 Wisconsin Ave., Oak Park, Ill.
Gaylord, W. B , Box 23, Sweetser, Ind.
Gross, F., 548 W. 164 St., New York, N. Y.
Guariguata, R., Apartado 45, Barcelona, Venezuela
Hershfield, S., 253 Harrogate Rd., Penn Wynne, Philadelphia, Pa.
Hillwood, J., 5200 Cote Ste. Catherine Rd., N.D.G. Montreal, Que., Canada
Homrighous, J. H., 1029 Wenonah Ave., Oak Park, Ill.
Johnson, H. L., 202 E. Monroe St., Valparaiso, Ill.
Johnson, W. C., School of Engineering, Princeton Univ., Princeton, N. J.
Jones, C. R., 41 Windermere Rd., Muswell Hill, London, England
Jones, J. W., Naval Radio Station WAHIAWA, Navy Yard, Pearl Harbor, T. H.
Joseph, D. P., 5 Stack St., Herne Bay, Auckland, N. Z.
Kerr, E. J., Radiophysics Laboratory, University Grounds, Chippendale, Sydney, N.S.W. Australia
Lee, C. E., 444 W. Vine St., Kalamazoo, Mich.
Leonard, N. E., 4722 Beck Ave., North Hollywood, Calif.
Levine, D., 293 Throop Ave., Brooklyn, N. Y.
Lipps, L. L., 518 E. First St., Bloomington, Ind.
Manuel, W. O., Rt. 1, Box 549-C, Tacoma, Wash.
Mason, J. E., 1511 Elizabeth Ave., Bremerton, Wash.
Mathewson, D., Box 2513, University Station, Gainesville, Fla.
Matteson, D. C., 799 S. Eighth St., San Jose, Calif.
Miles, H. L., Naval Air Station, Box 1283, Pearl Harbor, T. H.
Munsell, R. S., 797 Center St., Ashtabula, Ohio
Muntz, W. E., 799 Albany St., Schenectady, N. Y.
Nelson, C. W., Apt. 709, 2970 Sheridan Rd., Chicago, Ill.
Nelson, F. A., 4022 Yosemite Ave., St. Louis Park., Minn.
Nielson, J. J., 88 Broadway, Arlington, Mass.
O'Brien, D., 20 Queenborough Gdns., Ilford, Essex, England
Peterson, G. G., 15 Stanley Rd., Glenbrook, Conn.
Phelan, L. T., Old Lancaster Pike, Berwyn, Pa.
Phifer, L. H., 3120 Shadowlawn Way, San Diego, Calif.
Piquero Perez, G., Box 834, Bogota, Colombia

(Continued on page xxiv)

For Dependability . . . Stamina . . . Adaptability

STANCOR PROFESSIONAL SERIES TRANSFORMERS

BUILT TO MEET STRINGENT WARTIME REQUIREMENTS

THE Stancor Professional Series Transformers are the logical-choice of Radio Engineers, Broadcast Engineers, Governmental Agencies, Radio Manufacturers and other equipment designers and users. They are built to meet stringent wartime requirements.

STANCOR quality assures you of sound engineering design, the finest obtainable raw materials, thorough inspections, and high standards of craftsmanship.

★ GENERAL SPECIFICATIONS ★

CASE DESIGN—
A rugged physical construction featuring reversible mounting has been combined with a smart uniform appearance.

INTERNAL MECHANICAL CONSTRUCTION—
Special brackets and/or blocks added in assembly prevent shifting of coil and core inside of case.

IMPREGNATION—
The traditional STANCOR vacuum impregnation provides thorough protection against the effects of humidity and moisture. The special compound, sealing each unit in its case, gives additional protection and adds to the long life and service obtainable from these units.

The Stancor Professional Series Catalog No. 240 lists and thoroughly describes many types of professional series transformers. Also valuable charts to help you. Request your copy today.

STANDARD TRANSFORMER CORPORATION
1500 NORTH HALSTED STREET • CHICAGO

INTO THE MIKE, the bos'n pipes "General Quarters," the man-all stations call . . . the sound is transmitted to loudspeakers throughout the ship and Uncle Sam's fighting men spring to action! • Remler Company, Ltd., is one of a number of firms entrusted to furnish sound and announcing equipment of this type to maintain communications throughout the ship; between ships; and with shore stations and planes overhead. The equipment is ruggedly constructed to meet the critical standards of accuracy necessary under combat conditions. • Remler is proud of its assignment to furnish this type of equipment for the U. S. Navy and U. S. Maritime Commission.

REMLER COMPANY, LTD. • 2101 Bryant St. • San Francisco, Calif.

REMLER

Announcing & Communication Equipment

ELECTRICAL PLUGS AND CONNECTORS

Membership

(Continued from page xxii)

Podewils, N. R., 212 Summit St., Ann Arbor, Mich.
Poorman, E., 570 Lexington Ave., New York, N. Y.
Pratt, K. B., 514 Eliot St., Milton, Mass.
Rabinowitz, M., 369 Hinsdale St., Brooklyn, N. Y.
Reed, C. M., 363 Olancha St., Brentwood, Pittsburgh, Pa.
Robinson, S. H., U.S.S. *Barb*, Care of Postmaster, New York, N. Y.
Rosenkranz, H. J., 5000—15 Ave., Brooklyn, N. Y.
Ryan, J. A., 22 W. 5th St., Emporium, Pa.
Schaefer, R. W., U. S. Naval Air Station, A & R Accessories Radar, San Diego, Calif.
Schapira, M., 209 Custer Ave., Newark, N. J.
Segerstrom, C. A., Federal Telephone and Radio Corporation, 67 Broad St., New York, N. Y.
Seyffer, H. C., Naval Research Laboratory, RMS, Washington, D. C.
Sherman, W. L., Box 123, Portola, Calif.
Sherwood, R., 1456 E. 56 St., Chicago, Ill.
Shook, E. M., 2 Rutland St., Cambridge, Mass.
Sneiderman, L. R., Pentagon Bldg., Arlington, Va.
Sontheimer, C. G., 251 Hawthorne Ave., Haddonfield, N. J.
Stewart, G. R., 1426—21 St., N.W. Washington, D. C.
Tracht, P. A., 10220 Monica Ave., Detroit, Mich.
Utter, R. A., 5252 Cornelia Ave., Chicago, Ill.
Vena, E. S., Sylvania Electric Products, Inc., Williamsport, Pa.
Walker, F. W., Michigan State Police, East Lansing, Mich.
Weisz, P., Bartol Research Foundation, Swarthmore, Pa.
Zakowski, L. F., Radio Materiel School, Bellevue, Washington, D. C.

New Equipment Notes

Decade Resistance Boxes and Wheatstone Bridge

BECAUSE of the heavy and urgent demand for standard laboratory equipment of the Wheatstone Bridge and Decade Resistance Box categories, Industrial Instruments, Inc., 156 Culver Ave., Jersey City. N. J., now announces its line of such instruments.

Type DR D.C. Resistance Decades are available in standard models with resistance ranges of .9 to 999,999 ohms total and with guaranteed accuracy of plus/minus 1% and 1.% respectively, in two price classes. All coils are of Manganin wire excepting the 100,000 ohm coils of Nichrome.

Wheatstone Bridge Type RN-1 contains four resistance dials with nine positions each, covering 9×1, 9×10, 9×100, and 9×1000 ohms, with decade multiplying dials. The ratio resistances have a guaranteed accuracy of plus/minus .05%,

(Continued on page xxxii)

This is a "GLOBAL" war...

A man-made globe—the electronic tube—is today one of the key weapons of battle. Eimac tubes have assumed a rank of "high command" in this "global" war. Again they are "first choice in the important new developments in radio"

ARMY E NAVY

THE JOINT ARMY-NAVY "E" awarded September 4, 1942... first award of this kind to a manufacturer of electronic tubes.

EITEL-McCULLOUGH, INC.
SAN BRUNO, CALIFORNIA

Eimac TUBES

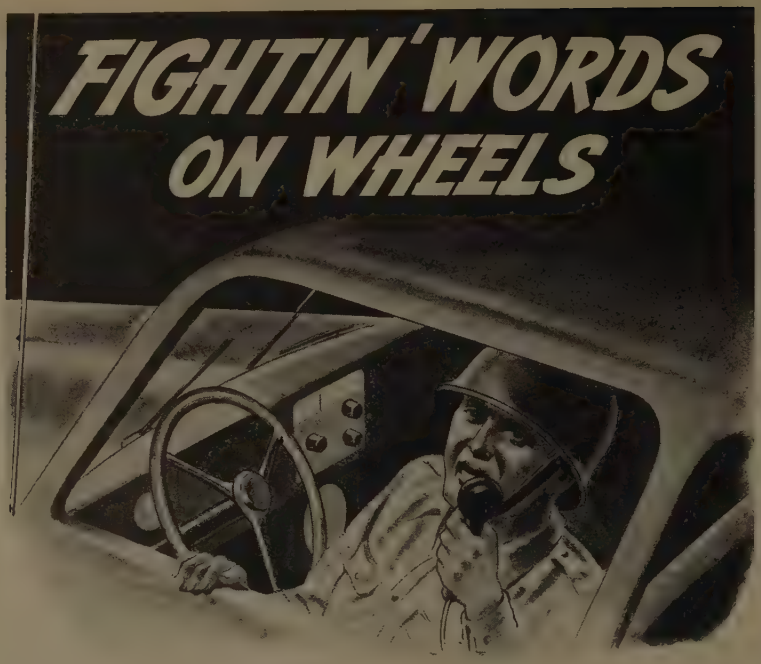

That's the business Oxford-Tartak Radio Engineers are handling—Designing and Producing unusual equipment that carries messages, code, information, "Fightin' Words" to freedom's men on every far-flung front.

More than just that, Oxford-Tartak manufactures emergency orders, odd orders and special orders. These are being produced on time, or ahead of time; but additional prime and sub-contracts may also be accepted under present operating conditions.

Currently on schedule:

- Aviation Radio Range Filters
- Transformers
- Mobile, Aircraft and Airport Transmitters
- Relay Coils
- Waterproof Speakers
- Electronic Equipments and Test Units

OXFORD-TARTAK RADIO CORP.
3911 S. Michigan Ave., Chicago, Ill.

Army-Navy "E" Honor Roll

(Continued from page xxx)

R.C.A. Radiomarine Unit. The fifth Army-Navy "E" flag won by R.C.A. was announced October 8th and officially presented December 19th to the Radiomarine Unit, a subsidiary of Radio Corporation of America. The award was made by Rear Admiral William Carleton Watts, and Army-Navy "E" emblems were given to 530 employees by Brigadier General Ralph K. Robertson who said, "In a way, this is a miliary decoration, bestowed upon you for devotion of duty." The flag was accepted for the company by I. F. Byrnes, chief engineer, and H. A. Saul, production superintendent on behalf of Charles J. Pannill, president. The ceremony took place at 75 Varick Street, New York, N. Y.

New Equipment Notes

(Continued from page xxiv)

while the resistance coils in the decades of the bridge are guaranteed to plus/minus .1% tolerance.

Sealed Variable Resistors for Humid or Dusty Applications

Two new closed-cover, sealed Varaible Resistors recently announced by the Stackpole Carbon Company, St. Marys, Pennsylvania, are described as meeting current demands for units which will meet intensely humid or dusty conditions, and in either standard radio or high-frequency equipment.

The Stackpole Type MG Variable Resistor is designed for use under conditions of extreme humidity or salt spray, and where internal and external leakage must be held to a minimum. A leakage resistance on the order of 300 meg. after 48 hours in 95% humidity at 40° C. is obtained in this new design. Spacing of current-carrying parts is greater, and the surface insulation of the molded base is several times that of previous laminated-base units.

The Stackpole Type LP Variable Resistor is now furnished with a dust-proof cover and is effectively sealed with a special compound to the point where resistivity from current-carrying parts after 48 hours of 95% humidity at 40° C. is five times that of the previous open construction units. The dust-proof cover makes the Resistor suitable for use in dusty or sandy localities.

Stackpole Engineering Bulletin No. 6 describing these Variable Resistors in greater detail will be sent upon request to the manufacturer.

The Handwriting on the wall

Victory is being won by our men and materiel . . . by an ever-increasing stream of weapons which will write doom for the Axis. Rapidly expanding American production has already turned the tide.

Daven plays a relatively small but necessary role in this great battle of supply. Daven components provide electrical control and measurement equipment for many fields. We furnish American industry with more than eighty models of laboratory test equipment and the most complete line of precision attenuators in the world.

THE DAVEN COMPANY

158 SUMMIT STREET NEWARK, NEW JERSEY

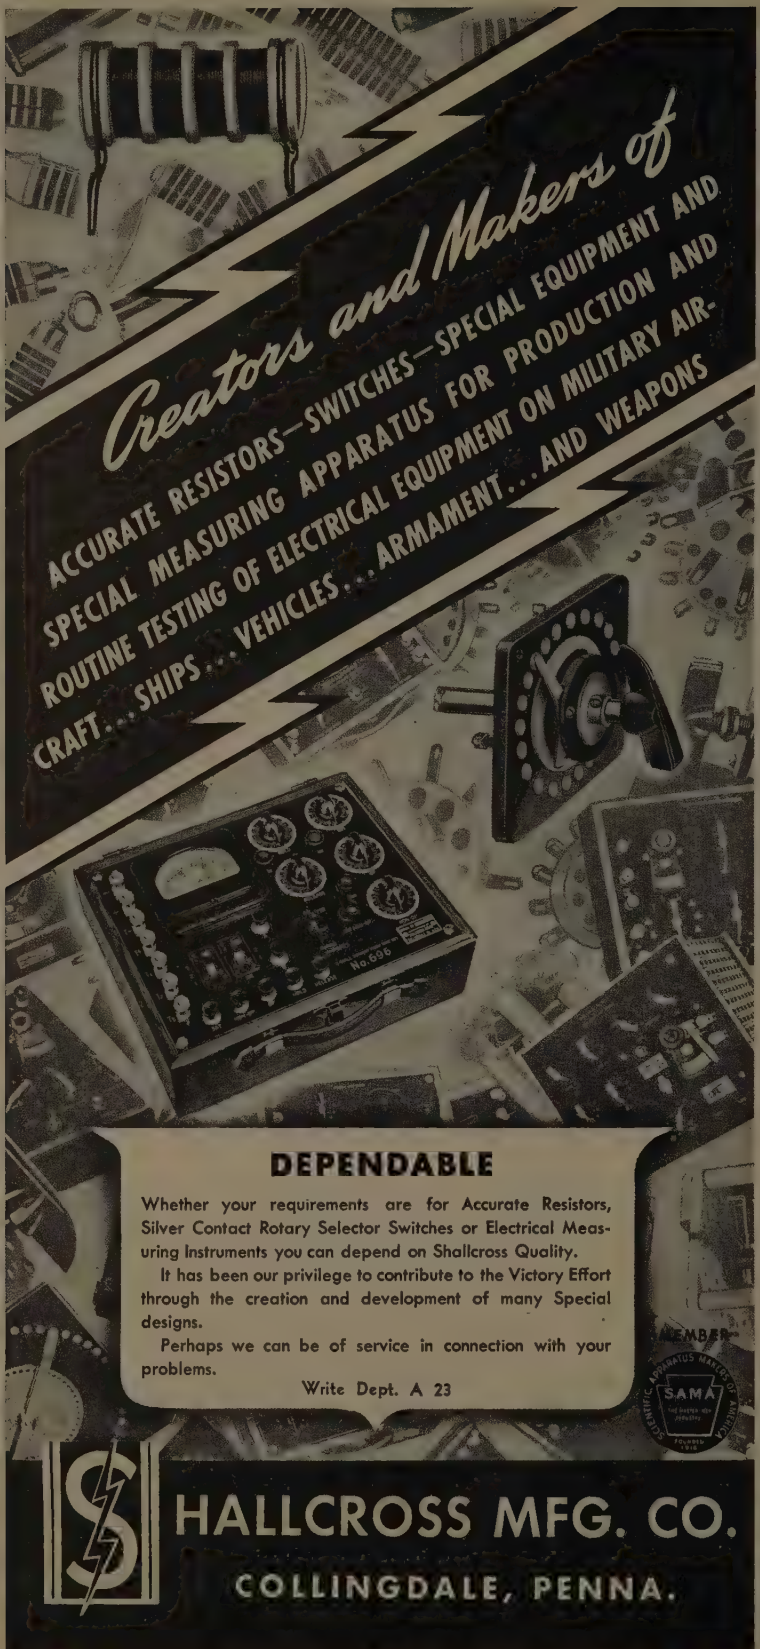
Creators and Makers of
ACCURATE RESISTORS—SWITCHES—SPECIAL EQUIPMENT AND
SPECIAL MEASURING APPARATUS FOR PRODUCTION AND
ROUTINE TESTING OF ELECTRICAL EQUIPMENT ON MILITARY AIR-
CRAFT...SHIPS...VEHICLES...ARMAMENT...AND WEAPONS
DEPENDABLE
Whether your requirements are for Accurate Resistors, Silver Contact Rotary Selector Switches or Electrical Measuring Instruments you can depend on Shallcross Quality.
It has been our privilege to contribute to the Victory Effort through the creation and development of many Special designs.
Perhaps we can be of service in connection with your problems.
Write Dept. A 23
SAMA
HALLCROSS MFG. CO.
COLLINGDALE, PENNA.

Section Meetings

Baltimore

"Absolute Measurements of Aircraft Speed and Course," by Lieutenant Colonel D. K Lippincott, Signal Corps, U. S. A., January 21, 1943.

Chicago

Colored Motion Picture of Battle of Midway, Shown and with Remarks by Ensign Werrenrath, Navy Procurement Office, November 20, 1942.

"Industrial Broadcasting," by D. D. Halpin, RCA Manufacturing Company, November 20, 1942.

Election of Officers, Dinner and Entertainment, December 18, 1942.

"The New Signal Corps Inspection Agency," by Major E. A. Koerner, Signal Corps, January 15, 1943.

"Recent Developments in Industrial Electronics," by L. L. Worner, Worner Products Corporation, January 15, 1943.

Cincinnati

"Antenna-Matching-Network Design as Applied to Mobile Transmitters," by H. M. Sarasohn and J. S. Cohen, Crosley Corporation, December 22, 1942.

Election of Officers, December 22, 1942.

Los Angeles

"Television, Present and Future," by H. R. Lubcke, Don Lee Broadcasting System, January 19, 1943.

New York

"Analysis of Rectifier Operation," by O. H. Schade, RCA Manufacturing Company, January 6, 1943.

Portland

"Problems in Design and Application of Carrier Systems," by C. W. Lund, Pacific Telephone and Telegraph Company, December 30, 1942.

Election of Officers, December 30, 1942.

Toronto

"Radio Interference," by H. O. Merriman, Department of Transport, Ottawa, December 7, 1942.

"Frequency Modulation," by L. W. Elliott, Canadian Marconi Company, Ltd., January 11, 1943.

Membership

The following admissions and transfers of membership were approved on February 3, 1943.

Transfer to Member

Dinger, H. E., 1301—46 St., S.E., Washington, D. C.

Dudley, B., 235 W. 71 St., New York, N. Y.

Ferrill, T. M., Jr., 6 Clare Rd., East Hempstead, L. I., N. Y.

Knight, J. B., U. S. Navy Underwater Sound Laboratory, Ft. Trumbull, New London, Conn.

Radius, C., 126 W. Hudson Ave., Englewood, N. J.

Membership

Sparling, A. G., 622 W. 20, Spokane, Wash.
Terry, C. J., 1175 Bushwick Ave., Brooklyn, N. Y.
Zender, R. G., 1751 N. Western Ave., Chicago, Ill.

Admission to Member

Cose, J. A., 1165 Loraine Ave., Plainfield, N. J.
Davis, D. M., Zenith Radio Corp., 6001 Dickens Ave., Chicago, Ill.
Innes-Crump, J. E., No. 3 Training Command, R.C.A.F., Montreal, Que., Canada
Maedel, G. F., 593 E. 38 St., Brooklyn, N. Y.
Meixell, O. S., 19 Pease Ave., Verona, N. J.
Omberg, A. C., 4112 Fourth St., Arlington, Va.
Sheer, C., 189-12—43 Rd., Flushing, L. I., N. Y.
Wenger, W. D., 1480 Glenwood, Sylvania Village, Pontiac, Mich.

Admission to Associate

Abrahams, W., 390 Ocean Pkwy., Brooklyn, N. Y.
Allen, A. E., 4007 — 75 St., Jackson Heights, L. I., N. Y.
Bairos, C. A., 125 W. Division St., Pleasanton, Calif.
Baptist, W. G., 114 Irvine Rd., Lexington, Ky.
Barrett, C. C., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Blasdel, F. G., Jr., *U.S.S. Marblehead*, Postmaster, New York, N. Y.
Blashfield, W. H., 252 Orange St., Galion, Ohio
Boario, W. R., 103 Market St., Leechburg, Pa.
Bow, A., 236 Brock Ave., Toronto 3, Ont., Canada
Bouie, W., 613 W. 146 St., New York, N. Y.
Boyd, L. K., R.M.O. Office N.O.B., Trinidad, B.W.I.
Boyter, R. W., 1327 McCutcheon Rd., Manhassett Village, Richmond Heights, Mo.
Briggs, V. R., 25 Lexington Ave., Bloomfield, N. J.
Brockner, C. E., Electrical Engineering Department, Union College, Schenectady, N. Y.
Brouse, H. L., 1755 Llanfair St., College Hill, Cincinnati, Ohio
Browning, R. G., 552—11 Ave., Prospect Pk., Delaware Co., Pa.
Buckley, W. C., 69 Parra Grande La., Santa Barbara, Calif.
Bull, C. A., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Buller, T. C., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Buonincontri, J., 920 Sandford Ave., Irvington, N. J.
Butt, H. G. T., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Calladine, B. T. O., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Caron, J. S. R., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Charton, S., USNTS (Ind.), Hollywood Beach Hotel, Hollywood, Fla.

(Continued on page xxii)

This trade mark is your guarantee of

ACCURACY · SPEED · ECONOMY

in laboratory and production measurements

Model 205 AG
Audio Signal Generator

hp INSTRUMENTS are as revolutionary as the one dial radio. They are designed to operate with the minimum of adjustments. Thus greater speed without sacrifice of accuracy is obtained.

SIMPLICITY IS THE KEYNOTE

Variable frequency, audio frequency oscillators require no zero setting. Vacuum tube voltmeter as simple to operate as a multi-range d-c instrument. Many types of instruments available separately or combinations in a single unit to fit your requirements such as the Model 205 AG which combines a resistance tuned audio oscillator, input meter, attenuator and impedence matching system. Illustrated are four -hp- instruments.

Model 200 B
Resistance Tuned Audio Oscillator



Model 325 B
Noise and Distortion Analyzer



Model 400 A
Vacuum Tube Voltmeter

GET COMPLETE INFORMATION NOW!

Write today for technical data sheets. Give details of your problem so that our engineers can be of help. There is no cost or obligation.

HEWLETT-PACKARD COMPANY

Box 135 F. Station A Palo Alto, California

MYKROY

CERAMIC INSULATING MATERIAL

A special bonded mica product

now serving widely in Army and Navy equipment

COMPARE!

These are some of the outstanding features and characteristics of MYKROY

INSULATING PROPERTIES—A low loss material that will not pass high frequencies nor dissipate h.f. energy. Will not carbonize under heat or arc, and therefore cannot create a path for leakage or short circuits.

MOISTURE RESISTANT — Absorption is negligible because it is non-porous, impervious to moisture, water, vapor, etc., thereby preventing failures otherwise due to improper insulation.

MECHANICAL STRENGTH—Nearly as strong in rupture as cast iron. Because it is not fragile it will withstand severe shock and vibration.

BONDING—Binds or seals perfectly to certain metals, thereby permitting its use in applications where bond or seal is critical.

MACHINABILITY—Machinable to high precision, either in simple surfaces or intricate parts.

NON-WARPING—No strain . . . no impairment of electrical contacts . . . no change in relation to associated parts . . . no change in form factor.

FROM REPORTS OF INDEPENDENT TESTING LABORATORIES

No. 4		No. 8
6.68	Dielectric Constant	(Dry) 6.75
6.73	Dielectric Constant	(Wet) 6.70
.00240	Power Factor	(Dry) .00164
.00241	Power Factor	(Wet) .00231
1.60	Loss Factor	(Dry) 1.11
1.62	Loss Factor	(Wet) 1.54
630 Volts per Mil	Dielectric Strength	660 Volts Per Mil.
22,000 lbs. per sq. in. rupture	Mechanical Strength	16,000 lbs. per sq. in. rupture

If you are confronted with an insulating problem, our engineers will welcome the opportunity to acquaint you with the performance of MYKROY. It is available in ample quantities and can be supplied for war and essential production requirements. For further information, please write to us or telephone today . . . PAssaic 3-4108.

MYKROY IS SUPPLIED IN SHEETS . . . MACHINED WITH PRECISION . . . . MOULDED TO SPECIFICATION . . . MADE EXCLUSIVELY BY

ELECTRONIC MECHANICS INC.

70 CLIFTON BOULEVARD • CLIFTON, N. J.

Hytron

DEDICATES *the* PRESENT *to* PRESERVATION *of the* FUTURE

HYTRON'S SOLE PURPOSE for the duration is to maintain an always-increasing flow of tubes into the radio and electronic equipment which is playing a vital part in winning this Radio War. It is our firm conviction that the torch of Liberty which Hytron is helping to keep burning will light the way to the unconditional surrender of our enemies and to an electronic age which will amaze a freed world.

HYTRON CORP., Salem and Newburyport, Mass.

. . . Manufacturers of Radio Tubes Since 1921 . . .

Those imaginary pixies that haunt our pilots can also gum up your microphone. Protect your unit from falls, heat, wind, moisture and improper circuit conditions. Above all, use common sense in handling your mike. Don't bang it around as though it were a football. You'll get longer, better service if you treat it right. When your mike fails or gives trouble, send it to the factory or its dealer — don't try home repair jobs!



The back page of the new Turner Microphone Catalog lists the DOs and DON'Ts for longer mike life. It's Free. Send for yours.

Send NOW for your Free Copy of Turner's new 8-page, fully illustrated, colorful Microphone Catalog. Each unit is engineered for specific jobs and trouble-free performance. Select the one best suited to your needs at the price you want to pay.

Free

THIS NEW TURNER MICROPHONE CATALOG

The **Turner** *Company*

Cedar Rapids, Iowa

Membership

(Continued from page xix)

Chernosky, E. J., 5241 Broad Branch Rd., N.W., Washington, D. C.
Childerhose, R. H., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Christilaw, J. S., 2516 Mayfield Ave., Montrose, Calif.
Cline, J. F., R.F.D. 5, Ann Arbor, Mich.
Cowan, S. D., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Crawford, W. G. R., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Cunningham, L. W., Edgewater Hotel, Winter Garden, Fla.
Declercq, R. H., 5360 Decelles Ave., Montreal, Que., Canada
Diamond, M., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Dingle, W. H., 169 Strathcona Ave., Ottawa, Ont., Canada
Disney, V. H., Madison and Damen Ave., Chicago, Ill.
Dorfman, J., 16 Martin Pl., Irvington, N. J.
Douglas, W. L., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Doyle, W. P., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Easterwood, D. F., Box 313, Lexington, Ky.
Fernane, J., 10 Cottage St., Medfield, Mass.
Fouchaux, J. D., Pilot Marine Corporation, 25 Beaver St., New York, N. Y.
Franta, A. L., Naval Research Laboratory, Anacostia Station, D. C.
Frenette, A., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Gash, R. W., *U.S.S. Helena*, c/o Fleet P. O., San Francisco, Calif.
Grier, R. W., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Grigg, R. W., 248 Broad St., Matawan, N. J.
Grunwald, R., Naval Ordnance Laboratory, Navy Yard, Washington, D. C.
Gurevics, D., 136 W. 70 St., New York, N. Y.
Hamilton, J. R., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Hardy, A. O., 9311 Sudbury Rd., Silver Spring, Md.
Harper, F. N., 327 N. Pine St., Chicago, Ill.
Haywary, F. T., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Herron, W. A., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Hertzler, E. A., Pratt Institute, Ryerson St., Brooklyn, N. Y.
Hill, M. O., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Hobbs, N. M., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Hudson, G. G., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Huge, H. M., Lorain Products Corporation, Lorain, Ohio
Hulstede, G. E., 16 Ware St., Cambridge, Mass.
Ingerville, C. S., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada

(Continued on page xxvi)

RCA

828

BEAM POWER

AMPLIFIER

$17.50

Now...

MANY ADDITIONAL HOURS OF LIFE

BECAUSE OF EXCLUSIVE RCA DESIGN IMPROVEMENTS

RCA engineering scores again—this time with manufacturing improvements which make it possible for the famous RCA-828 Beam Power Amplifier to deliver its 150 watts* with only 2.1 watts of driving power many hours longer than heretofore.

Chief among the improvements has been the incorporation of the RCA zirconium-coated molybdenum anode in this popular tube. Actual service tests over a long period have proved that this construction change increases the life of the tube several fold!

Ordinarily, such a change might well warrant a substantial boost in the performance ratings of a tube—but not under war conditions. Longer and still longer tube life now looms far more essential than high "peak" performance. Thus, always conservatively rated in line with RCA practice, the RCA-828 now comes to you with a safety factor several times greater than ever before—just as similar improvements in other RCA Transmitting Tube types have been reflected, not in spectacular rating increases, but in terms of making the tubes perform better and lasting longer at the ratings at which you are already accustomed to using them.

RADIO CORPORATION OF AMERICA
RCA Victor Division, *Camden, N. J.*

RATINGS

FILAMENT VOLTAGE, 10 VOLTS
FILAMENT CURRENT, 3.25 AMPERES
PLATE VOLTAGE, 1250 VOLTS, MAX.*
SCREEN VOLTAGE, 400 VOLTS, MAX.*
PLATE DISSIPATION, 70 WATTS, MAX.*

*CCS rating for class C telegraph service.



HOW TO MAKE YOUR TUBES LAST LONGER

This valuable booklet, based on RCA Transmitting Tube advertising of the past year, contains dozens of helpful tips on getting maximum life from your old tubes. Get your copy today . . . free. Address: Radio Corporation of America, Commercial Engineering Section, Harrison, N. J.

RCA TRANSMITTING TUBES

PROVED IN COMMUNICATION'S MOST EXACTING APPLICATIONS

Platinum and Platinum Alloys in Sheet, Wire, Tubing and Special Shapes

Every step in the production of Platinum and alloys—from ingot to finished product—under one roof and specialized supervision. . . . Your inquiry is invited. We shall be glad to advise regarding the adaptability of Platinum or an alloy for any specific purpose. . . .

- FUSE WIRE—In Iridium Platinum and other alloys; drawn to exact resistance specifications
- FINE WIRE, RIBBON, FOIL—drawn to close tolerances . . . Wire as fine as .0005" diameter; Ribbon to .0001" thickness
- RHODIUM PLATING SOLUTION—for reflecting surfaces
- SPECIAL FORMS—to meet individual requirements . . .

SIGMUND COHN

44 GOLD ST. NEW YORK

SINCE 1901

REMLER

Plugs and Connectors

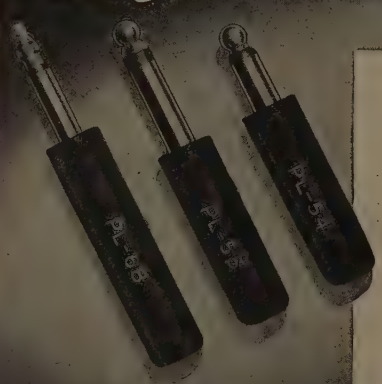

ARMY SIGNAL CORPS SPECIFICATIONS

- Also PL—PLP—PLQ and PLS Plugs
- M Type Connectors
- M Type Caps
- FT Type Fittings

Quantity Prices Quoted on receipt of Delivery Schedules

Manufacturers of Communication Equipment SINCE 1918

REMLER COMPANY, Ltd. · 2101 Bryant St. · San Francisco, Calif.

Membership

(Continued from page xxii)

Johnson, H. C., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Jones, E. L., R.F.D. 1, Oneida, N. Y.
Koski, J. I., 2228 Yucca St., Fort Worth, Tex.
Kurz, T. M., Calzadz Tacubaya 10-C, Mexico, D. F.
LaBossiere, E. R., 230 W. 76 St., New York N. Y.
Lisman, H., 214—14 St., Belmar, N. J.
Logan, R. W., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Lynch, J. A., Naval Research Laboratory, Anacostia Station, D. C.
Margolin, S. I., 2713 Montezuma Ave., Alhambra, Calif.
Mawson, N. M., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
McArthur, B. M., 2708 S. Arlington Ridge Rd., Arlington, Va.
McCaffrey, F. K., D.S.O., 3 Base P.O., San Juan, P. R.
McLean, J. W., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Neesley, T. R., 635 Roscoe St., Chicago, Ill.
Norman, R. O., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Nuss, S. L., Jr., 224 Washington St., Boonton, N. J.
O'Donnell, C. F., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Olsen, E. P., 1605—Sixth Ave., N., Great Falls, Mont.
Onyskin, M., 91-40 Lamont Ave., Elmhurst, L. I., N. Y.
Paquin, C. E., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Parker, A. B., 432 B Lewers St., Honolulu, T.H.
Pilling, T., P.O. Research Station, London, N.W. 2, England
Pugh, J. E., 547 Mellon St., S.E., Washington, D. C.
Ramirez, G. C., Calle C 711 altos., Vedado, Havana, Cuba
Ramsay, A. R., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Reid, G. K., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Rhodes, C. E., 209 Beach 138 St., Belle Harbor, L. I., N. Y.
Roberts, A. E., 515 Hillsdale Ave., E., Toronto, Ont., Canada
Robinson, G. D., 975 Midwood Dr., Rahway, N. J.
Schumacher, C. M., 695 Morrill Ave., Columbus, Ohio
Scroggins, C. M., 1232½—14 St., Corpus Christi, Tex.
Seale, G. A., 67 Bournedale Rd., No., Manhasset, L. I., N. Y.
Seltzer, L. N., 2234 Wisconsin Ave., N.W., Washington, D. C.
Sherburne, C. J., 3139 Wynwood La., Los Angeles, Calif.
Silbert, D. T., 53 W. Pomona St., Germantown, Pa.
Silk, N. R., 2408 Malabar St., Los Angeles, Calif.
Smith, A. A., 48 Broad St., Newark, N. J.
Swistum, W., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Szekely, G., 127 W. 96 St., New York, N. Y.

(Continued on page xxx)

Radio Noise
SABOTAGES COMMUNICATIONS
unless...

ke so many demons, the crashes and crackles of unwanted radio ise can play havoc with communications. They blot out words—al words broadcast from plane to plane, from ship to ship, from mmand car to jeep or tank. They endanger the lives of fighting en—they sabotage communications—*unless* the proper suppres-n filter system is installed.

Solar Elim-O-Stats suppress interference *right where it starts.* ey absorb interference from generators, motors, contacts and ier sources. Thousands of these compact filters protect the lives our land, sea and air fighters. They prevent the blotting out vital communications in radio-directed combat.

Pioneers in capacitor manufacture and electronic research, Solar gineers probe the rapidly-expanding future of radio develop-nt. In post-victory cars, ships and planes, Solar war-proven pacitors and Elim-O-Stats will safeguard civilian communica-ns, just as they are safeguarding military operations today. ar Manufacturing Corporation, Bayonne, New Jersey.

Solar

SOLAR — ELIM-O-STAT —



MAKERS OF RADIO

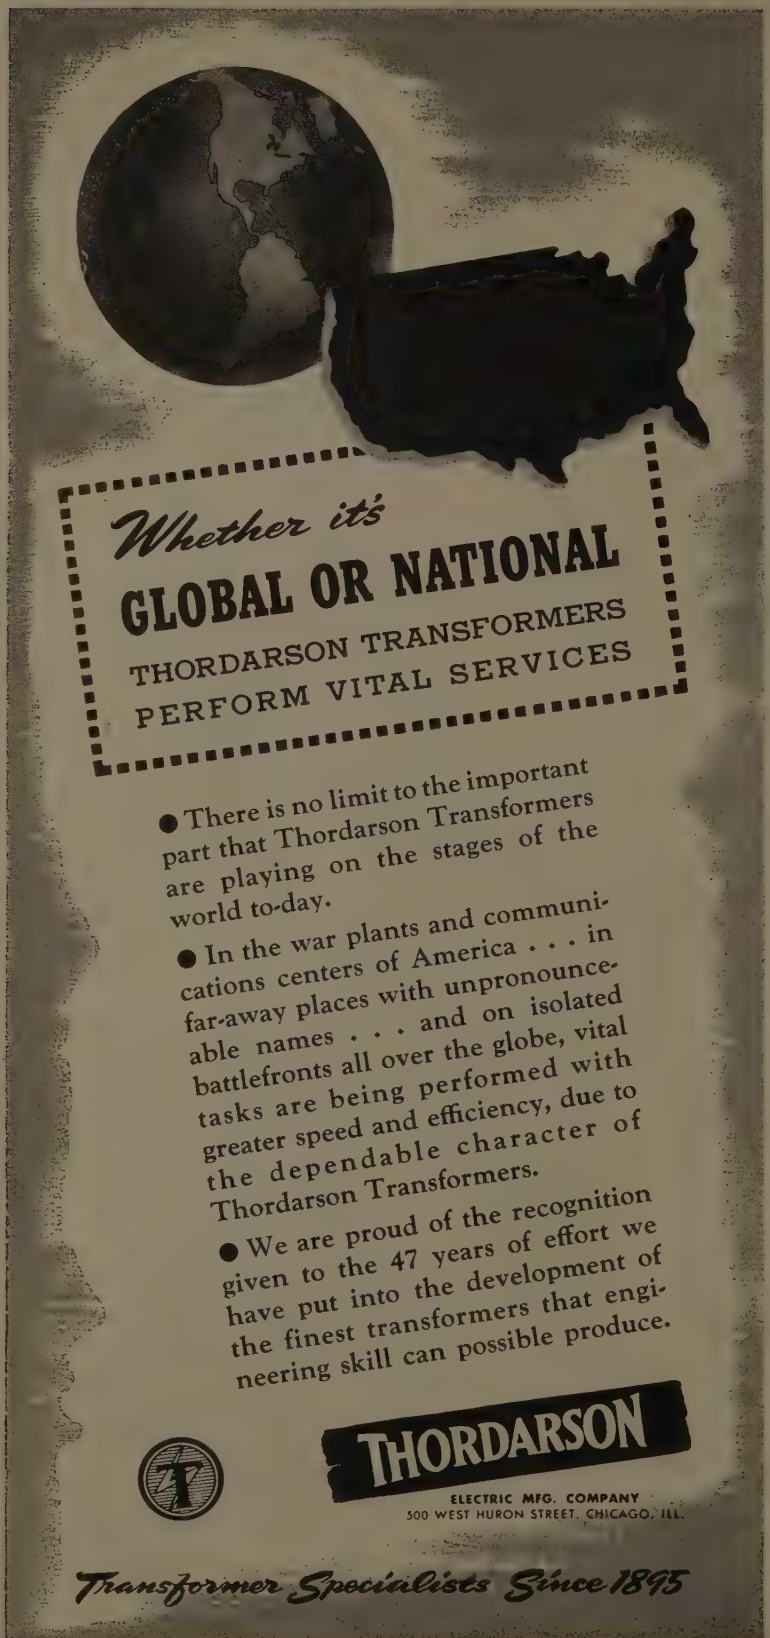
Whether it's
GLOBAL OR NATIONAL
THORDARSON TRANSFORMERS
PERFORM VITAL SERVICES
● There is no limit to the important part that Thordarson Transformers are playing on the stages of the world to-day.
● In the war plants and communications centers of America . . . in far-away places with unpronounceable names . . . and on isolated battlefronts all over the globe, vital tasks are being performed with greater speed and efficiency, due to the dependable character of Thordarson Transformers.
● We are proud of the recognition given to the 47 years of effort we have put into the development of the finest transformers that engineering skill can possible produce.
THORDARSON
ELECTRIC MFG. COMPANY
500 WEST HURON STREET, CHICAGO, ILL.
Transformer Specialists Since 1895

Membership

(Continued from page xxvi)

Theriault, J. A. L., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada

Thompson, P. A., R.C.A.F., No. 1 Wireless School, Montreal Que., Canada

Thunen, G. W., 950—30 St., Oakland, Calif.

Tucker, F. M., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada

Tyson, O. A., 52 Garden St., Cambridge, Mass.

Volz, P. E., 188 Main St., Orange, N. J.

Webb, H. E., Jr., 153 Moss Ave., Highland Pk., Mich.

Wheeler, M. S., 37 Watsessing Ave., Bloomfield, N. J.

Wilkerson, J. R., 204-08—42 Ave., Bayside, L.I., N. Y.

Wollman, E., 466 Rockaway Pkway., Brooklyn, N. Y.

Zaander, C. J., Naval Research Laboratory, Anacostia Station D. C.

Booklets

The following commercial literature has been received by the Institute.

COAXIAL CABLES

The extensive use of coaxial cable and its related adjuncts in modern radio technique render timely a booklet (Bulletin 23) issued by the Victor J. Andrew Co. of 363 East 75th Street, Chicago, Illinois. Soft-temper cable in crated coils from $\frac{1}{4}$ inch up to and including $\frac{7}{8}$ inch diameter is available. Hard-temper cable from $\frac{1}{4}$ inch diameter upward is provided in straight 20-foot lengths with a pair of connectors for each such length. Information is given on the transmission loss in such cables, the use of dry nitrogen gas in such cables, their high frequency performance and installation, and the factors which determine the choice of suitable cable diameter. There is a tabular list of mechanical and electrical properties of such cables in unusually convenient form.

Sealed terminals, attachments, pressure gauges, soldered fittings, straight connectors, junction boxes, right angle bends, expansion fittings, anchor sections, collar clamps, gas inlet tees, and other fittings are described together with their mode of use. The nitrogen gas fittings with pressure gauge panels and equipment for air dehydration are also shown. Gas-tight cable terminals involving a glass-to-metal seal are interestingly explained.

Passing into devices for use with directional antenna arrays, a phase monitor of the direct-reading type is described and its normal use indicated. The booklet concludes with descriptions of remote-indicating antenna ammeters.

OHMITE RESISTORS

function under all variations of climatic conditions...

Extremes of climate are an old story to Ohmite Resistors. These rugged wire-wound vitreous enameled units have proved their worth in both the freezing cold of the arctic and the heat and humidity of the tropics. Often the same resistors face both extremes as they go from one climate to the other, yet they keep doing their job accurately, dependably, *because* they are built right. Ohmite Resistors are used today in endless variety and number in war and industry, and are ready to aid in the development of new devices for tomorrow.

There are many types and sizes in regular and special units to meet practically every requirement. Units produced to Government specifications. Ohmite Engineers are glad to help you.



Write on company letterhead for 96-page Catalog and Engineering Manual No. 40—a helpful guide in the selection and application of Rheostats, Resistors, Tap Switches, Chokes and Attenuators.

OHMITE MANUFACTURING CO.

Foremost Manufacturers of Power Rheostats, Resistors, Tap Switches

4862 FLOURNOY STREET, CHICAGO, U. S. A.

PREMAX

TUBULAR METAL ANTENNAS

IN THE ARMED SERVICES OF THE UNITED NATIONS

. . . ON LAND
. . . ON SEA
. . . IN THE AIR

Premax Metal Antennas are meeting the rigid requirements of the fighting forces of the Allied Nations. Send for Bulletin of Standard designs, or submit your specifications for special types of Antennas and Mountings.

Premax Products

DIVISION OF
CHISHOLM-RYDER CO. INC.
4301 Highland Ave., Niagara Falls, N.Y.

New Equipment Notes

Durashield, A New Laminated Plastic

There has recently been developed and marketed a material known as Durashield, a laminated plastic planned to meet defense demands for a satisfactory substitute for brass, copper, or bronze nameplates, tool checks, dial faces and similar marking plates on ships, machinery, and metal equipment of every kind.

Durashield is the product of Plastic Fabricators, Inc., 500 Sansome Street, San Francisco, California, and is built to meet minimum Navy requirements in the standard grade. Both the Navy and the U. S. Maritime Commission have accepted the product for ships being built at West Coast shipyards, and for use on machinery or other equipment connected with defense contracts.

Durashield is produced by a lamination process. In order to meet minimum Navy specifications, the center sheet upon which the wording is printed is an opaque cellulose acetate plastic, .010 thick. On each side of this is laminated a transparent acetate plastic, .020″ thick; making a finished product measuring .050″ thick. The transparent outside allows clear vision of the directions, name, or whatever may be printed on the center, and being laminated in a solid plate is stated to resist wear and remains a solid unit to replace the familiar brass, bronze, or copper plates heretofore used. An advantage of the new product is the fact that it can be die-cut, stamped, drilled, or otherwise made to conform to any specification as to size and shape. It is fire resistant, successfully withstanding temperatures of 200 degrees F. Durashield can be obtained in colors, thus conforming in many cases to well-established and familiar trade marks heretofore reproduced in metal.

New High Speed Relay

Allied Control Company's Model AK Relay is a high speed Keying and Break-In Relay for Aircraft Radio Equipment. It is compactly designed for high voltage, high speed and resistance to vibration. Its push-pull magnetic arrangement provides magnetic holding pressure on both transmit and receive contacts. One pole is equipped with two windings one of which is a holding winding connected directly across the battery supply. The other winding is connected in series with the single winding on the other pole and polarized so that when the circuit is completed through the key, the flux is neutralized on the holding or receive position pole and the armature pulls up to the transmit position. Opening the key cuts off the bucking flux and the holding flux pulls the armature back to receive position.

Allied's AK Relay is completely balanced; its arms are equipped with anti-bounce features; it is magnetically held in both positions and does not rely on back spring pressure; it keys at 20 cycles; its contact rating is 1,000 volts at 30,000 feet, 20 megacycles; 4 pole double throw; it is insulated to sustain 10,000 volts at sea level; its standard models are in 12 and 24 volts D.C.; its wattage consumption is 5.5 in first position and 17.0 in second position; it withstands vibratory motion to better than 20 G.; all of its terminals are easily accessible; its insulation plate is of high pressure steatite; it is mounted with elastic stop nuts and its dimensions are 2 7/16 × 3½ × 2½ inches; its weight is 17 ounces

Type TD4 Time Delay Relay

Designed specifically to furnish maximum protection to vacuum tube equipment under unusual and difficult operating conditions, a new time delay relay has been developed by The R. W. Cramer Company, Inc. of Centerbrook, Connecticut.

Basically, the Type TD4 Time Delay Relay consists of a synchronous motor-driven timer which delivers an accurately measured but adjustable time delay prior to activation of a switch mechanism. As such, it is suitable for the controlling application of plate voltage to mercury vapor rectifiers and other tube equipment.

The heavy steel base plate provided for mounting is zinc plated. The cover is zinc plated and has a black crackle finish enamel over the zinc. The joint between cover and base plate is sealed by a compressible gasket. The entrance for control cables is sealed by a special grommet and by a sealing compound. The entire mechanism is, therefore, protected against dust, moisture and air with intent to eliminate any possibility of condensation inside the case. The wiring is protected against moisture by protective coating.

The Cramer Type TD4 Time Delay Relay provides the customary resetting action of its predecessors so that the full delay period is delivered in cases where circuits are re-energized after power interruptions of considerable duration.

In cases of momentary power failures some ordinary timers reset completely. The Type TD4, however, holds the time actuated switch in operating position for about 3/10 seconds after all power is cut off. Interruptions of less than 3/10 seconds, however, do not cause resetting of the timer and equipment functions normally with power restoration. In addition to protection against atmospheric conditions, the mechanism is designed to prevent opening or closing of the switch by heavy jarring or rapid vibration. This is a requirement for many industrial applications as well as for Marine and Military service.

New Shure Reactance Slide Rule

A handy new Reactance Slide Rule that speeds up the solution of reactance and resonant frequency problems has been devised by Shure Brothers, designers and manufacturers of microphones and acoustic devices.

Electronic and electrical engineers, physicists, radio service men, radio amateurs, teachers and students find this ac-

(Contained on page xl)

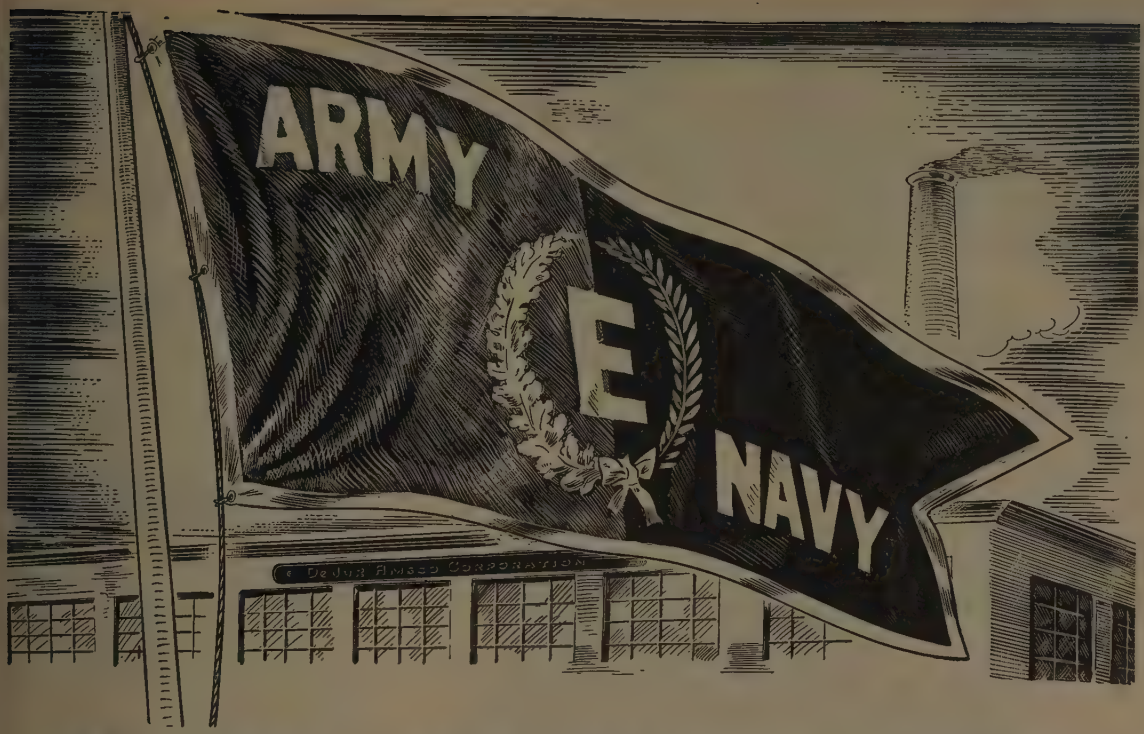

JOE, MARY, TONY, MAC *You've* WON IT!

Dear Employees:

You've earned the Army-Navy . . . "E" . . . And yet, we knew you would . . .

Not many months ago, you, of the DeJur Amsco Corporation served a peacetime market in a peacetime world . . . Today you work with fervor . . . hurdling all obstacles to produce for the Armed Forces . . . Your time, your labor have been diverted to PRODUCTION FOR WAR . . . PRODUCTION OF MATERIALS TO WIN THIS WAR . . .

Today DeJur Instruments, Potentiometers, and Meters have joined the fighting fronts . . . to serve America . . . and the World.

RALPH A. DeJUR President

DeJur-Amsco Corporation

Shelton, Connecticut

● We believe every good American wants above all to get this war won. Certainly that is the spirit here in the "Connecticut" plant. But postwar planning is as necessary to the business world as to government.

We do not believe tomorrow's world and yesterday's world have much in common.

We think that many of tomorrow's better things will come from "a little black box" containing automatic electric and electronic equipment. It will do much more than turn things on and off automatically at certain times — it will "look inside" materials being fabricated into finished products, "inspect" transportation equipment to be sure it is safe. It will improve communications amazingly.

This "little black box" is not the invention of "Connecticut" or any other one company. It merely represents the practical application of advanced electrical and electronic principles, many of which are being learned from wartime development. "Connecticut" development engineers will have much to offer the manufacturer who would like to see the magic of "a little black box" applied to his product, or to machines in his plant.

CONNECTICUT TELEPHONE & ELECTRIC DIVISION

ARMY E NAVY

GAI

MERIDEN, CONNECTICUT

New Equipment Notes

(Continued from page xxxviii)

curate Slide Rule useful in their every-day work. It saves time solving resonant frequency problems, capacitive reactance problems, inductive reactance problems, coil "Q" problems, and dissipation factor problems.



On one side of this new Shure Slide Rule, resonant frequency problems are solved with one setting of the slide, using

$$\omega^2 LC = 1$$

with ranges of 5 cycles to 500 megacycles, .001 mmf. to 1,000 mf., and .00001 mh. to 10,000 henries.

On the other side of the Slide Rule, reactance, dissipation factor and coil "Q" problems are solved with one setting of the slide, using the following formulae:

$$X_C = \frac{1}{2\pi fC}$$

$$X_L = 2\pi fL$$

$$Q = \frac{2\pi fL}{R}$$

$$D = 2\pi fCR$$

The ranges on this side are 0.1 cycle to 10,000 megacycles, 1 mmf. to 100 mf., and .001 mh. to 100 henries.

This new Reactance Slide Rule is available at a nominal charge of 10¢ in coin or stamps to cover the cost of handling and mailing. Shure Brothers, 225 West Huron St., Chicago, Ill.

New Multitester

The new R.C.P. model 419 Multitester combines in one instrument, A.C.-D.C. voltmeter, milliameter, ammeter, capacitymeter, ohmmeter and inductance meter thus making this unit suited for a wide range of shop, laboratory and field applications.

The model 419 incorporates in its design the new R.C.P. system of A.C. measurements, eliminating the copper oxide rectifier. A.C. scales are linear with D.C. scales. Sensitivity of meter is 2,000 ohms per volt—accurate to within 2%. Capacity-meter is direct reading with widespread scales. Ohmmeter has self-contained power supply. Sensitivity of low ohm range permits checking shorts, measuring of contact resistance, resistance of voice coils, etc. Meter is fused and supply line double fused. Special position provided for determin

(Continued on page xlii)

Engineers • Technicians • Teachers • Students Send for this

NEW SHURE REACTANCE SLIDE RULE

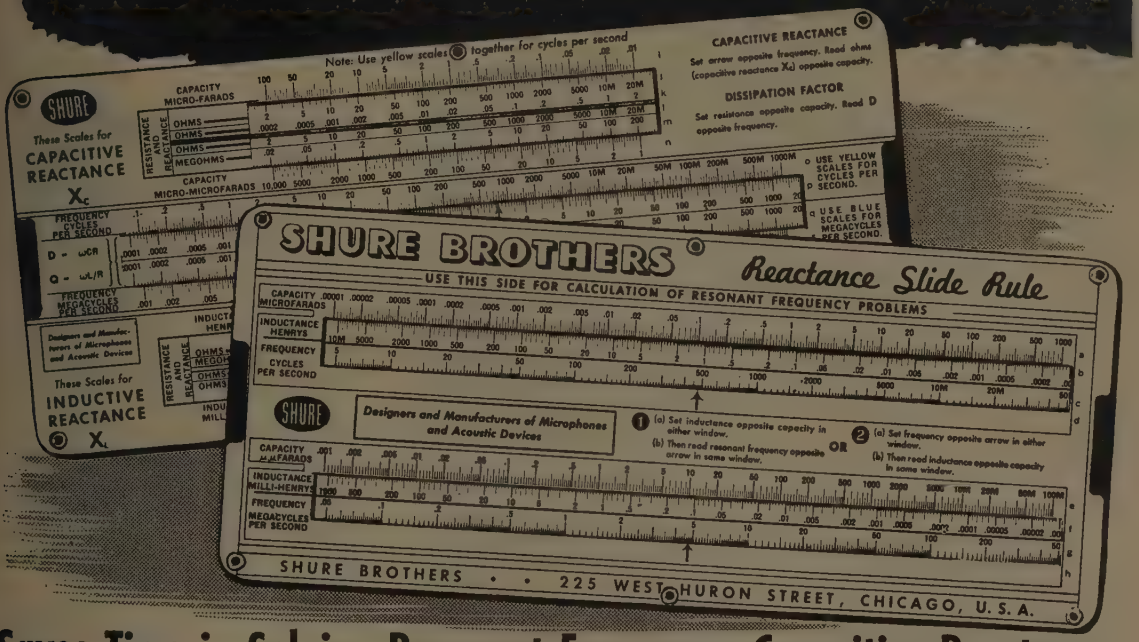
SHURE BROTHERS
Reactance Slide Rule
USE THIS SIDE FOR CALCULATION OF RESONANT FREQUENCY PROBLEMS
SHURE
Designers and Manufacturers of Microphones and Acoustic Devices
SHURE BROTHERS • • 225 WEST HURON STREET, CHICAGO, U.S.A.
These Scales for CAPACITIVE REACTANCE Xc
These Scales for INDUCTIVE REACTANCE XL
CAPACITIVE REACTANCE
DISSIPATION FACTOR
USE YELLOW SCALES FOR CYCLES PER SECOND.
USE BLUE SCALES FOR MEGACYCLES PER SECOND.

Saves Time in Solving Resonant Frequency, Capacitive Reactance, Inductive Reactance, Coil "Q" and Dissipation Factor Problems

Here's how it works

FRONT	EQUATION	SOLVES	RANGE
Resonant Frequency problems	$\omega^2 LC = 1$	1. Resonant Frequency if L and C are known 2. Various L and C values for desired resonant frequency	**Frequency** 5 cycles to 500 megacycles **Capacitance** .001 mmf. to 1,000 mf. **Inductance** .00001 mh. to 10,000 henrys
BACK			
Reactance problems	$X_L = 2\pi fL$ $X_C = \frac{1}{2\pi fC}$ $Q = \frac{2\pi fL}{R}$ $D = 2\pi fCR$	Any single unknown variable, providing remaining variables are known in equations for Inductive Reactance, Capacitive Reactance, Coil "Q", Dissipation Factor	**Frequency** 0.1 cycle to 10,000 megacycles **Capacitance** 1 mmf. to 100 mf. **Inductance** .001 mh. to 100 henrys

Write Shure Brothers, Dept. 174P, 225 W. Huron, Chicago, U.S.A. Sending 10c in Coin or Stamps to cover cost of handling and mailing

SHURE

Shure Brothers, designers and manufacturers of Microphones and Acoustic Devices, are supplying our Armed Forces and our Allies with rugged military microphones for duty on land, on the sea, and in the air. However, you can still obtain our standard line of microphones for vital civilian needs. See your local radio parts distributor—or write for catalog 154P.

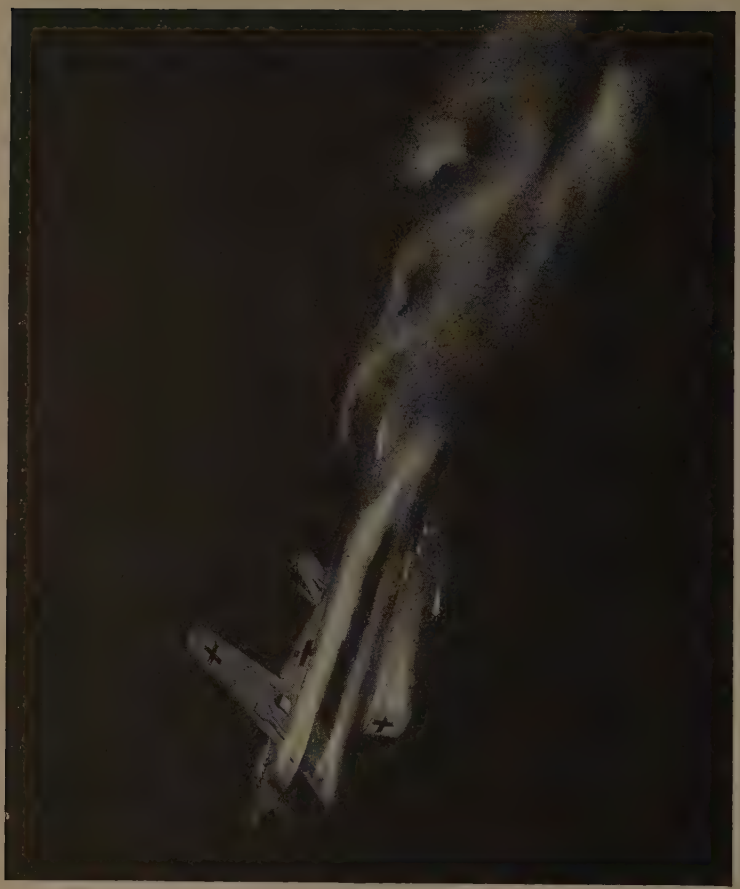

BULL'S-EYE IN THE DARK

Stabbing out into the black of night . . . locating winged raiders . . . downing an unseen enemy . . . electrical and electronic devices are helping United Nations win mastery of the air.

Today, the Allies are benefiting by the years of peacetime research. Companies long active in the radio industry, like Utah Radio Products Company, are turning the skill of their laboratories to the manufacture of weapons for war.

Utah dependability, long a byword in the radio industry, is being built into all kinds of electrical and electronic devices, for the Navy, Army and Air Corps.

We would like to tell you this whole story of Utah developments, but that would be interesting to the enemy, too; so the full details will have to wait until after the war.

Then, when America is back in the swing of peacetime activity—American homes and factories will benefit from the wartime research and improvements that are now going on at Utah. Re-united family circles will have greater convenience and enjoyment. Industrial production will be assured of greater economy and efficiency. UTAH RADIO PRODUCTS COMPANY, 842 Orleans St., Chicago, Ill.

Utah

PARTS FOR RADIO, ELECTRICAL AND ELECTRONIC DEVICES, INCLUDING SPEAKERS, TRANSFORMERS, VIBRATORS, UTAH-CARTER PARTS, ELECTRIC MOTORS

New Equipment Notes

(Continued from page xl)

ing output voltage. New improved terminals replace the conventional jacks.

Range: D.C. voltmeter: 0–5–50–250–2,500–5,000 volts. A.C. voltmeter: 0–10–100–500–1,000–5,000 volts. D.C. milliam-

meter: 0–1–10–50–250–1,000 ma. D.C. ammeter: 0–1–5–25 amps. Capacitymeter: 0–.03–.30–3.0–30–300 mfd. Low ohmmeter: 0–100–15,000–150,000 ohms. Megohmmeter: 0–1.5–15 megohms. Inductance measurements—chart reference: .25–1,000 milliehenries, .25–100–1,000–10,000 henries.

Model 419 is available in three types, prices ranging from $34.50 to $44.50. Further information can be obtained upon application to the manufacturer: Radio City Products Co., Inc. 127 West 26th Street, New York City.

Worker Moral High at Microphone Plant

This is a brief account of worker morale in a radio manufacturing plant. At Cedar Rapids, Iowa is the factory of the Turner Company, makers of crystal and dynamic microphones. Their output goes to the Galvin Manufacturing Corporation, which has expressed its gratitude for the high-speed production of its supplies.

But this accomplishment did not satisfy the Turner Company's employees. At Christmas, they earnestly petitioned their employer not to give them their well-earned Christmas bonus but instead to devote the funds to the purchase of a jeep for the Army. This was done—and followed two days later by an enthusiastic citation from the Secretary of the Treasury expressing the Governmental appreciation of the employees' "patriotic and generous donation."

Proud of the spirit in its plant, the Company nevertheless presented the regular Christmas bonus in addition to its employees. In democratic union, there is strength!

Announcing a change of name

HAZELTINE SERVICE CORPORATION

becomes . . .

HAZELTINE *Electronics* CORPORATION

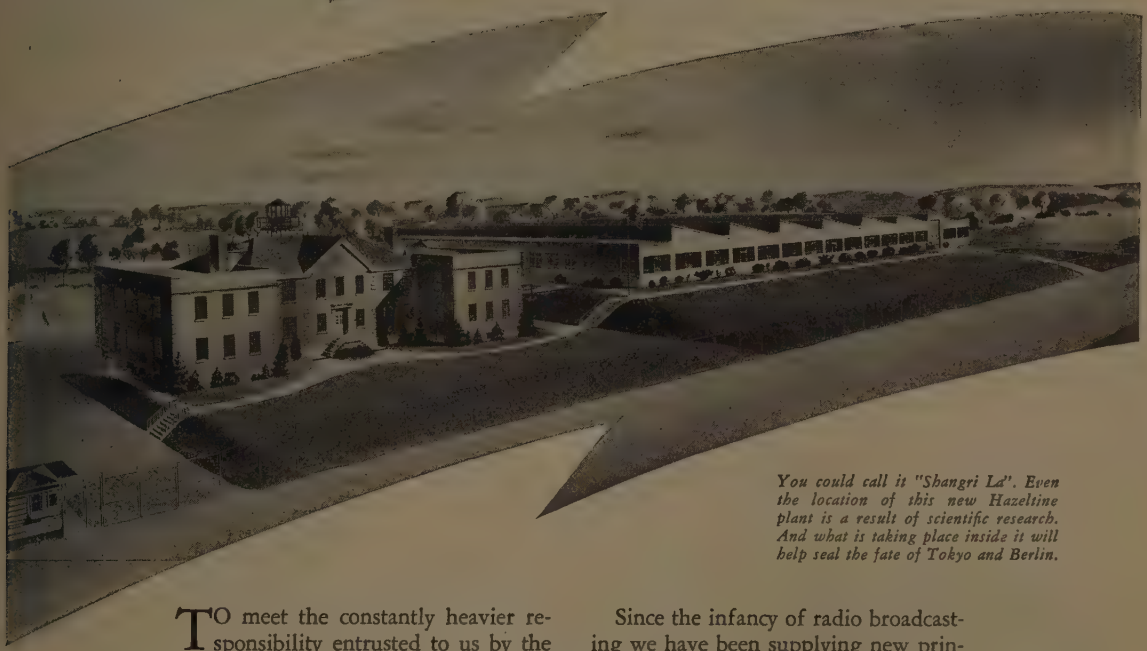

You could call it "Shangri La". Even the location of this new Hazeltine plant is a result of scientific research. And what is taking place inside it will help seal the fate of Tokyo and Berlin.

TO meet the constantly heavier responsibility entrusted to us by the Army and Navy — and ultimately to serve industry better—we at Hazeltine have enlarged all facilities for research and development in the field of electronics.

With the completion of this project it is fitting that we take the new name —HAZELTINE ELECTRONICS CORPORATION. For we are equipped in plant and personnel to undertake solution of the most complex problems in electronics.

Since the infancy of radio broadcasting we have been supplying new principles, circuits, techniques and equipment. Today, Hazeltine developments are playing a vital part in keeping the United Nations superior to the enemy.

Under the stress of war we are concentrating years of research into the space of months. When our facilities once again can be turned to peace-time use, there will be at Hazeltine a deep reservoir of knowledge and experience that can be invaluable in tomorrow's world of electronics.

HAZELTINE ELECTRONICS CORPORATION

A WHOLLY OWNED SUBSIDIARY OF THE HAZELTINE CORPORATION • 1775 BROADWAY, NEW YORK

TRIPLETT
Combat Line
TESTING EQUIPMENT

TRIPLETT

The Toughest Test in History

Miracles must be done in minutes in mechanized warfare. And Triplett Testers, built to the needs of war, are valued tools with America's armed forces.

Here are a very few of Triplett Combat Line Testers. There are many! Each different in adaptation to each specific purpose; unfailingly alike in precision performance under the toughest test ever devised.

After Victory the values of Triplett wartime experience will be evidenced by advanced technical superiority and by precision performance that might well seem miraculous today.

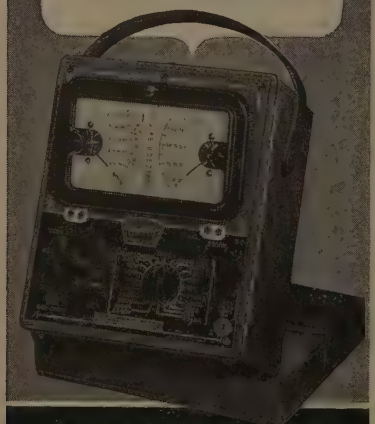

A WORD ABOUT DELIVERIES

Naturally deliveries are subject to necessary priority regulations. We urge prompt filing of orders for delivery as expeditiously as may be consistent with America's War effort.

TRIPLETT ELECTRICAL INSTRUMENT CO.
BLUFFTON, OHIO

Fire Prevention Requirements for Electric Radios Revised

by H. B. Smith

Associate Electrical Engineer, Underwriters' Laboratories, Inc.

Note: The following paper which is reprinted by permission from "Industrial Standardization," a publication of the American Standards Association, is of interest to radio engineers. It presents recent data on a design and production question normally requiring the engineer's consideration. THE EDITOR.

Courtesy Underwriters' Laboratories

Here, the various circuits of the internal wiring of a small portable receiver are being checked.

A FEW weeks ago, the November, 1942 edition of the Standard for Power-Operated Radio Receiving Appliances[1] of Underwriters' Laboratories, Inc., was given approval by the American Standards Association and is now a recognized American Standard. This is the sixth edition of the Standard, superseding the edition of April, 1938, and it is the third edition of the Standard which has had ASA approval.

The Standard contains the Laboratories' requirements for power-operated radio receiving appliances for non-commercial use, designed to be employed on interior wiring systems in accordance with the National Electrical Code. The requirements, in so far as they apply, cover also television receivers, non-commercial or domestic phonographs, record players, recorders, and similar equipment. Battery chargers, however, either portable or for permanent installation and not intended for use with radio appliances, are classed as rectifiers and are not covered by the requirements.

This current edition of the Radio Standard is the outgrowth of the Laboratories' experience with power-operated radio receiving appliances for about seventeen years, beginning with the examination and testing of separate A- and B-battery eliminators about 1926. Prior to that time, the radio sets in use by the general public had been crystal sets and battery-operated vacuum-tube sets which involved no hazardous connections to electricity lighting and appliance circuits. Eliminators were superseded within a year or two by power packs built into the receivers themselves, and from that time to the present practically all radio receivers have been complete and self-contained with only an external supply cord to be plugged into a convenient outlet.

The general purpose of the Standard is to serve as a guide for the manufacturers whose products have been or will be submitted to Underwriters' Laboratories, Inc., for investigation, and for the Laboratories' engineers at the testing stations at New York, Chicago, and San Francisco where the examination and test work is done. Radio manufacturers knowing the requirements which their receivers must meet in order to be listed by the Laboratories are able to proceed with the details of design and construction, including what is frequently rather expensive equipment in the way of dies, tools, molds, etc.; and they are assured that listed receivers in competing lines will also have to meet the same requirements. With Standard requirements for reference, the Laboratories' engineers, although located at three widely separated points, are able to conduct their examination and test work with a high degree of uniformity—something which is particularly essential in work of this nature.

Reduce Fire and Accident Hazards

The Laboratories' work on radio appliances is to determine that the fire and accident hazards involved have been reduced to an acceptable degree. Accordingly, such features as the size, shape, and general appearance of a receiver or its selectivity, sensitivity, fidelity, and the various refinements of control and station selection are not investigated; and there is, therefore, practically nothing in the requirements covering these items.

The requirements call for a substantial enclosure which will house all live or current-carrying parts involving fire or accident hazard, except cords or cables. Capacitors and inductors operating at a potential obtained directly from a metallic conductive connection to the power-supply circuit and involving fire hazards are required to be housed within a complete enclosure of noncombustible material. The area of openings for ventilation or other purposes is limited. The type of flexible cord for connection to the supply circuit

(Continued on page lvi)

[1] American Standard for Power-Operated Radio Receiving Appliances (C65.1-1942) 25 cents.

MAKING EQUIPMENT THAT CALLS FOR *Sealed* VARIABLE RESISTORS?

STACKPOLE IRON CORES

Thanks to years of specialized experience in the molding of solids from metal powders, Stackpole has the answer to almost any iron core problem. Among the many types produced regularly are iron cores for use at frequencies as high as 150 to 175 megacycles. Other cores for fixed or variable inductance, or for station tuning are available in many grades and sizes for use at any frequency up to 50 megacycles.

Need Variable Resistors that will stand the gaff of operation under wet, humid, sandy, or dusty conditions?

Then it should pay to check your requirements against the Stackpole Types MG and LP units that were specifically developed for just such jobs.

Type MG Variable Resistor is designed for extremely humid or salt spray conditions, and for use where internal and external leakage must be held to a minimum. *Actually, leakage is on the order of 300 meg. after 48 hours in 95% humidity at 40° C.*

Type LP Variable Resistor, long known for its dependability, is now furnished with a dust-proof cover and effectively sealed with a special compound to the point where resistivity from current carrying parts after 48 hours of 95% relative humidity at 40° C. *is five times that of the previous open-construction units!*

Complete details gladly sent upon request.

STACKPOLE CARBON COMPANY, ST. MARYS, PENNA.

STACKPOLE MOLDED PRODUCTS

Carbon, Graphite, Metal and Composition Contacts • Brushes for all rotating equipment • Carbon Anodes • Bearings • Brazing Blocks • Electrodes • Pipe • Rheostat Plates and Discs • Welding Rods, Electrodes and Plates, etc., etc.

STACKPOLE ELECTRONIC COMPONENTS

Fixed and Variable Resistors • Iron Cores • Switches

STACKPOLE

EVERYTHING IN CARBON BUT DIAMONDS

Melting 'em down

All Wilbur B. Driver Company special alloys including "BERALOY A" (beryllium-copper), "TOPHET" (nickel-chrome), and "CUPRON" (copper-nickel) are melted in our Ajax Northrup Induction Furnaces under the supervision of our Metallurgical Staff. The countless vital war applications for these alloys in rod, wire, ribbon, and strip are definitely helping to dissolve the Axis. We are literally "melting 'em down"!

WILBUR B. DRIVER CO.
NEWARK, NEW JERSEY

RADIO AND ELECTRONIC PARTS DELIVERED .... *Now!*

FOR ALMOST **a quarter of a century Lafayette has maintained quick, accurate delivery service from complete stocks—one or a thousand units, there is no order too small or too large.**

ENGINEERS: **Get acquainted with Lafayette's immediate delivery service—send in your order now to this ONE CENTRAL SUPPLY DEPOT for those hard to find parts—radio, electronic, or sound. Draw on the thousands of varied items now in Lafayette's stockrooms. You can depend on Lafayette quality.**

FREE! 130 page illustrated CATALOG containing thousands of items indexed for quick reference — order your copy now! Address 901 W. Jackson Blvd., Chicago — Dept. 3H3.

Camera Fans: Photographic Equipment at lowest prices. Write for FREE PHOTOGRAPHIC CATALOG.

LAFAYETTE RADIO CORP.
901 W. JACKSON BLVD., CHICAGO, ILL. 265 PEACHTREE STREET, ATLANTA, GA.

Fire Prevention

(Continued from page liv)

is specified and provision is made for suitable bushings and strain relief in connection with the cord.

Materials and Devices Must Comply with Requirements

The various materials used are required to be products which are recognized as suitable for the particular application; and accessories such as receptacles, lamp-holders, switches, etc., are required to be devices which comply with the Laboratories' requirements for those classes. Capacitors are required to present no undue fire or accident hazard. Substantial transformers with impregnated coils are specified, and definite limitations are placed upon the ventilating openings in transformer enclosures. Appropriate insulated conductors are required for all interior wiring, and spacings throughout a receiver are specified. Special attention is given to the accessibility and hazards of live parts. Fire and accident hazards are defined and provisions are made for the reduction of these hazards to an acceptable degree.

The complete investigation of a radio receiver consists of a careful examination of construction details to determine that the appliance complies with the above-mentioned requirements, and a comprehensive test program designed to insure the safe operation of the receiver under the conditions of actual service—including some of the abnormal conditions which are likely to obtain.

To Be Checked by Tests

The features which are checked by means of tests include:

Power Consumption—A determination of wattage input, to insure that the power required to operate a receiver is not more than 5 per cent in excess of the marked rating on the appliance.

Leakage Currents—A determination of the currents which may flow from exposed or partially protected live parts. Such leakage currents are required to be held within safe limits.

Temperature—Operation of a receiver under normal conditions to determine that specified temperature limits on various materials and parts are not exceeded. Temperatures high enough to present any fire hazard and temperatures which would result in the deterioration of insulation or other essential nonmetallic material are not considered to be acceptable.

Dielectric Strength—A comprehensive check on the adequacy of the insulation and spacings throughout a receiver, with particular reference to the factor of safety over the potentials normally existing at various points.

Strain Relief—A 35-pound test on supply cords.

Abnormal Operation—Special tests on parts which are normally operated for limited periods of time, but which may be operated continuously under abnormal conditions. Pull-out tests on separable connectors. Short circuit tests on capacitors and cables.

(Continued on page lviii)

PROVEN UNDER FIRE



National Radio Equipment, designed for peacetime use, is proving out in the hardest tests of war. Receivers and parts that look familiar to any Ham are coming off our lines in steadily increasing quantities to serve in combat communications. National takes especial pride that war brought no sudden redesign of our products.

Just as in peacetime, our equipment was tailored to serve the amateur, so now the same basic designs have been modified to meet the specialized needs of United Nations fighting men. As in peacetime, National designs are being steadily improved, but under the pressure of war, years of research and development are being telescoped into months.

There are many technical developments that we wish we could tell you about now. When the war is won, you will be able to see them in the finest equipment National has ever built.

NC

NATIONAL COMPANY, INC., MALDEN, MASS.

OFFICIAL U. S. NAVY PHOTOGRAPH

LONGER LIVES...

FOR MEN AND EQUIPMENT

...due, in part, to extensive research being undertaken in the N-Y-T Sample Department

THE development of new-type transformers to diversified and extremely critical specifications . . . their perfection for accurate and dependable functioning under varying operating conditions . . . mechanical and dimensional designing to meet physical limitations of the applications—all these make up the work of the N-Y-T Sample Department. And all are tremendously important in safeguarding our Armed Forces, and increasing the life-span of their machines and equipment.

The N-Y-T Sample Department is prepared to give immediate consideration to your special problems and make deliveries within a matter of days. Send us your inquiries.

NEW YORK TRANSFORMER COMPANY

24-26 WAVERLY PLACE NEW YORK, N. Y.

Fire Prevention

(Continued from page lvi)

New Features in Revised Edition

Among the new features of the revised edition of the Standard are the following paragraphs relating to shock hazard, and a description and wiring diagram of a device with provision for input, line, and meter connections which has been found to be suitable for determining compliance of a radio receiver with the new requirements for voltages and corresponding leakage currents at exposed or partially protected live parts.

A current-carrying part which involves shock or fire hazard shall be spaced or otherwise suitably insulated for the voltage involved and suitably protected for the expected service.

Shock hazard shall be considered to exist at a live part in a circuit involving a potential of 125 volts or less in the following cases:

(A) At an exposed live part, if the open-circuit potential is more than 25 volts and the current with a 1500-ohm load is more than 5 milliamperes.

(B) At a partially protected live part, except as noted in paragraph 75, if the open-circuit potential is more than 35 volts and if the current with a 1500-ohm load is more than 15 milliamperes, with a maximum allowable A-C component of 10 milliamperes in any case.



A —Terminals for the connection of a 120-volt A-C supply circuit.

C —0.5 mf paper capacitor.

F —Fuse in the transformer primary circuit.

I —Terminals for input connection from the appliance under test.

M—Terminals for the connection of a meter having a full-scale deflection of 100 microamperes.

R_1—1500-ohm resistor.

R_2—2,121,000-ohm resistor.

S_1—Reversing switch (two-pole, double throw).

S_2—Single-pole switch (may be double-throw) with settings for reading volts or milliamperes on the meter.

S_3—Two-pole, three-point selector switch with settings for reading AC, DC, or AC+DC on the meter.

T —Twin-diode tube, No. 6H6.

For AC plus DC—Throw the reversing

(Continued on page lx)

HT-4B

HERE is that high-powered rig you have always wanted to own . . . one that you can depend upon for peak operating efficiency. Hallicrafters have built into the HT-4B the resultant experience from years of engineering research.

Model HT-4B delivers a carrier output of 325 watts on phone and 450 watts on CW. The preamplifier supplied with the transmitter can be mounted conveniently at the operating position, controlling volume, keying and standby . . . once adjusted to any band the rig may be operated remotely.

When, once again, we are permitted to sell communications equipment for civilian use — your HT-4B will be waiting for you.

hallicrafters

CHICAGO, U. S. A.

World's largest exclusive manufacturer of short wave radio communications equipment.

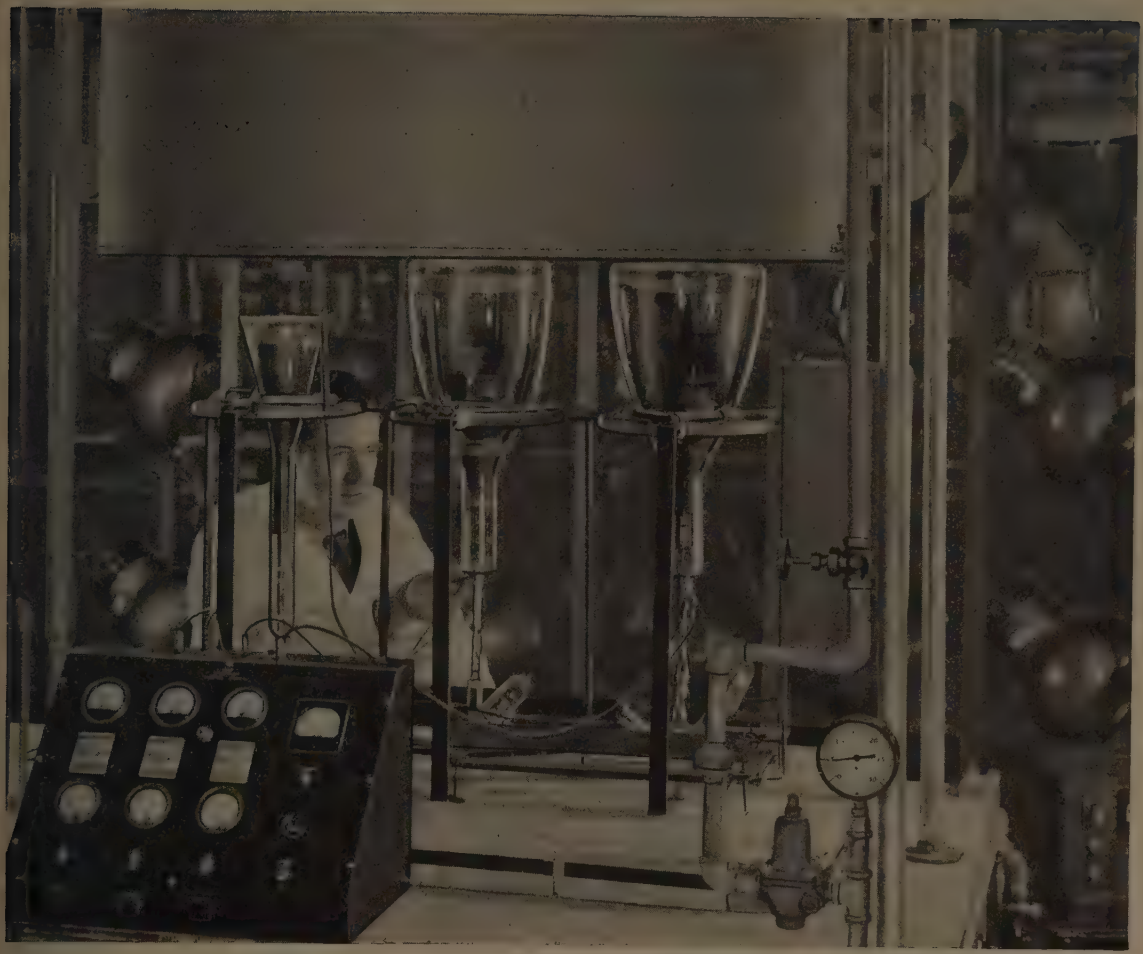

Electronic "brains" made to order

Electronic energy . . . that powerful, mystifying force, is being directed into highly useful channels at RAULAND laboratories. RAULAND engineers, with a background of years devoted to the development of specialized electronic devices, culminating, for example, in the high power cathode ray tube for large screen television, are performing *modern miracles.* Unlike the familiar radio tube, cathode ray tubes which harness this class of electronic power, cannot be made in mass production. Each is designed for a special application ...sizes and shapes varying greatly, depending upon the particular job for which each is *"tailor-made."*

Research-physicists, engineers and craftsmen at RAULAND are proud that their cathode ray tubes and similar special electronic tube types are contributing so much to the advancement of *Communications* for our armed forces . . . that their present efforts promise also great benefits to human welfare when war is done.

• *Electroneering* is our business •

Rauland

RADIO — SOUND — COMMUNICATIONS

The Rauland Corporation . . Chicago, Illinois

Buy War Bonds and Stamps! Rauland employees are all investing 10% of their incomes in War Bonds.

ACCURATE • PRECISION BUILT • RELIABLE

BLILEY ELECTRIC COMPANY

ERIE, PENNSYLVANIA

Fire Prevention

(Continued from page lviii)

switch, S_1 to the position which gives the maximum reading.

(a) For current, the reading is in milliamperes (rms of the sine wave or 0.707 times the peak of the complex wave),

(b) For potential in volts, multiply the reading by 1.5 (rms of the sine wave or 0.707 times the peak of the complex wave).

For AC Only—The meter readings are the same as (a) and (b). If different readings are obtained using both positions of the reversing switch, the average of the two readings is to be taken.

For DC Only

(c) For current in milliamperes, multiply by the reading 1.414.

(d) For potential in volts, multiply the reading by 2.12.

At the present time, in accordance with the orders of the War Production Board, there is no production of radio receiving appliances for civilian domestic use. The Standard does not cover commercial or military radio equipment, and there is, therefore, practically nothing being made at this particular time which is judged under the requirements. The Standard has, however, been carefully studied by all the manufacturers of listed power-operated radio receiving appliances and reviewed by others known to have an interest in the subject; and in its up-to-date form will be available for use by the Laboratories, the manufacturers, and others concerned as soon as the present war emergency is over.

. . . the Highest Standard in Magnetic Measurements

To maintain a high degree of uniform magnetic quality and precision, Arnold engineers use The *High H Permeameter* (illustrated)... *a duplicate of the Permeameter in use at the National Bureau of Standards*... just one example of the close magnetic control under which the Arnold magnets are manufactured.

All ALNICO types of Permanent Magnets... including ALNICO V...are completely fabricated in the Arnold plant under exacting metallurgical, mechanical and magnetic control.

Arnold engineers are available to solve your magnetic design problems...all inquiries will receive prompt attention.

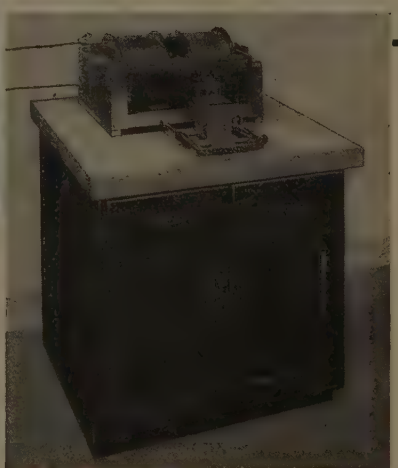

★ FOR VICTORY . . . invest at least 10% in War Bonds. ★

THE ARNOLD ENGINEERING COMPANY

147 EAST ONTARIO STREET • CHICAGO, ILLINOIS

PRODUCERS OF MAGNETS FOR AIRCRAFT, MARINE, RADIO, ELECTRICAL AND OTHER TYPES OF MEASURING INSTRUMENTS

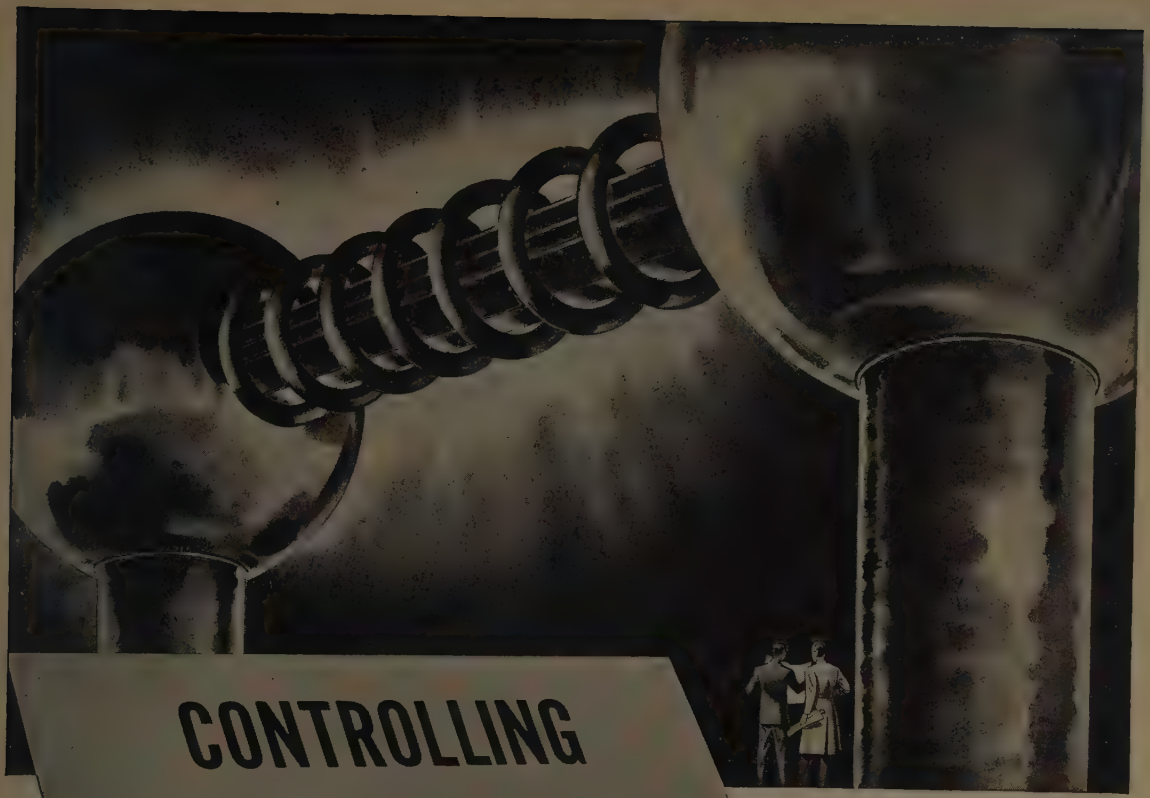

CONTROLLING MILLIONS OF VOLTS!

Electron beam tube of atom-smasher.

In the vast new province of Nuclear Physics the atom-smashing "Big Guns"—the Van de Graaff generators, the cyclotrons and betatrons—are carrying on a campaign of *creative* destruction.

Manned by an army of collaborating specialists, this massive and complex artillery has already achieved spectacular results in the medical, chemical and biological fields and in scientific developments which must remain secret for the duration. The "smashing" of atoms has released new energies, created new atoms.

Despite the tremendous force required to produce high-speed electrons, protons and ions, the controls and measuring devices perform with amazing accuracy.

IRC is proud to have contributed to the development of resistor units, both Wire Wound and Metallized—of fixed and variable types—used in the measuring instruments. And IRC engineers have produced special resistors used to stabilize corona and other disturbing phenomena in atom-smashers.

If you are confronted with a problem involving resistance devices, we invite your inquiry. Our engineering staff, specialists in the design of all types of resistors, can be depended upon for impartial counsel.

★ PREFERRED FOR PERFORMANCE ★

IRC

REG. U.S. PAT. OFF.

★ FIXED & VARIABLE RESISTORS ★

INTERNATIONAL RESISTANCE COMPANY

401 N. BROAD ST., PHILADELPHIA

Electronics
Written in the Sky
A new world of wonders, through
ELECTRONICS
From the very beginning, Thordarson engineers recognized this amazing industry as a new challenge to their imaginations and a new opportunity to achieve.
As a result, Thordarson developments in the field of electronics are today far advanced . . . and they bear the same hall-mark of superiority which is a part of every Thordarson accomplishment...
When the propitious moment arrives, the tremendous scope of our research in electronics will be self evident!
THORDARSON
500 WEST HURON STREET, CHICAGO, ILL.
Transformer Specialists Since 1895

Membership

The following indicated admissions and transfers of membership have been approved by the Admissions Committee. Objections to any of these should reach the Institute office by not later than April 30, 1943.

Transfer to Member

Howes, F. S., Electrical Engineering Dept., McGill University, Montreal, Que., Canada

Koehler, G., Electrical Laboratory, University of Wisconsin, Madison, Wisc.

Admission to Member

Kraus, J. D., Washington, D. C.

Schairer, O. S., Radio Corporation of America, 30 Rockfeller Plaza, New York, N. Y.

The following admissions to Associate membership were approved on March 3, 1943.

Albano, J. A., 215 E. Livingston Ave., Orlando, Fla.

Adkins, J. M., 127 Signal Radio Intelligence Co., Ft. Sam Houston, Texas

Ausin, H. A., 1532 Centre St., Roslindale, Mass.

Barger, G. K., 1228 Olympic Way, Seattle, Wash.

Batchelder, E. F., Jr., 573 West St., Keene, N. H.

Baylis, G. F., R.C.A.F., No. 1 Wireless School, Montreal Que., Canada

Bergen, R. S., Box 711, Westbury, N. Y.

Blahna, C., 3351 N. Rutherford Ave., Chicago, Ill.

Blewett, J. P., General Electric Co., Research Laboratory, Schenectady, N. Y.

Boone, E. M., Engineering Dept., Ohio State University, Columbus, Ohio

Boyer, W. P., Box 134, Miami Springs, Fla.

Brannen, C. W., 511 Loew Bldg., Syracuse, N. Y.

Brobst, A. K., 1929 Woodvale Ave., Reading, Pa.

Brockett, P. C., 261 Rodes Ave., Lexington, Ky.

Brodie, L., D. of M. M., MGO Branch, N.D.H.Q., Ottawa, Ont., Canada

Bullard, R. W., 2502 D St., Sacramento, Calif.

Burks, A. W., Moore School of Electrical Engineering, 200 S. 33 St., Philadelphia, Pa.

Burns, H. S., 94 County St., American Jewels Corp., Attleboro, Mass.

Caffin, R. F., 37 Faversham Rd., Canterbury, E. 7, Victoria, Australia

Carroll, E. A., 525 Upland Rd., Manoa, Upper Darby, Pa.

Castenholz, F. E., 1921 Wood St., Muskegon, Mich.

Chandler, G. C., 846 Howe St., Vancouver, B. C.

Chew, W. H., 711 E. Hillwood Ave., Falls Church, Va.

Crozer, W. A., 1432 Constance St., Los Angeles, Calif.

Denton, A. D., 25 York Rd., Kettering, Northants, England

(Continued on page xxii)

"We've been using Wilcox Equipment for two years—without a single interruption"

says E. H. Forsman, Supt. of Communications for Continental Air Lines

WILCOX equipment has an important part in the vital communications operations of leading airlines, and uninterrupted service is proving Wilcox dependability. The Wilcox factories have converted their entire facilities and experience to production for military needs...to help keep 'em flying until Peace is assured. But, after the war Wilcox equipment again will be available for the huge expansion in civil air transportation that is certain to come.

There MUST Be Dependable Communications

Communication Receivers
Airline Radio Equipment Aircraft Radio
Transmitting Equipment

WILCOX ELECTRIC COMPANY

Quality Manufacturing of Radio Equipment

14th & Chestnut Kansas City, Mo.

Photo, courtesy Continental Air Lines

Tone . . .



Sine waves of a tuning fork, A-440 cycles per second. Note the pure wave form absolutely devoid of harmonics. If secondary waves are superimposed on the fundamental wave, we have the harmonics or overtones which distinguish voices or instruments.



G-392 cycles per second as produced by a single reed of an accordian. Complex wave form is the result of reed being driven to a high amplitude, producing many harmonics or overtones.



E-392.6 cycles per second as produced by the D string of a violin, with first finger in position. Since the entire body of the violin resonates, the tone is rich in harmonics and wave form will vary greatly from note to note.

LET'S SEE THE DIFFERENCE BETWEEN A STRADIVARIUS AND A TEN-DOLLAR VIOLIN!

★ Good tone—the average ear demands just that. But how can we describe *good tone*—in precise terms other than mere personal opinion as to what "listens good?"

The DuMont oscillograph again comes to the rescue. Simply pick up the voice or instrument, and reproduce it as an oscillogram. Here we have a faithful portrayal of fundamental pitch and overtone components. If that voice or instrument is pleasing, then we have a veritable *electronic master blueprint* to be followed and matched in duplicating that desired tone quality.

Thus tone is no longer a matter of personal opinion. It is a precise *quantity* as well as quality to be duplicated. Which represents but another example of how the versatile DuMont oscillograph is employed today.

★ Write for Literature . . .

DUMONT

ALLEN B. DU MONT LABORATORIES, Inc.
Passaic · New Jersey
Cable Address: Wespexlin, New York

Membership

(Continued from page xx)

DeVries, R. T., 1077 West 31 St., Los Angeles, Calif.
Dickens, W. D., Howard College, Durban, Natal, South Africa
Diggs, G. C., 245 Frost Ave., Rochester, N. Y.
DiStadio, D., 864 E. 149 St., Bronx, N. Y.
Dolan, C. M., Naval Training School, U.S.S. *Despatch*, San Francisco, Calif.
Ellis, E. W., 9265—46 S. W., Seattle, Wash.
Erb, R. J., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Frost, G. R., 400 Kenilworth Rd., Bay Village, Ohio
Gauthier, E. J., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Goeppinger, A. L., 109 Joliet St., S.W., Washington, D. C.
Goldstein, S., 324 Blue Hill Ave., Roxbury, Mass.
Gray, J. E., 44—43 Douglaston Pkway., Douglaston, L. I., N. Y.
Green, M., 594 Kocsiusko St., Brooklyn, N. Y.
Hampton, L. R., McCellan Field, Sacramento Air Depot, Sacramento, Calif.
Harris, D. D., R.D. 2, New Kensington, Pa.
Harris, J. R., 500 Ninth St., Brooklyn, N. Y.
Heckler, E. A., 6553 S. Wood St., Chicago, Ill.
Heller, C. B., 33–50—28 St., Long Island City, L. I., N. Y.
Hensel, M. L., 7 Lafayette Pl., Chatham, N. J.
Henshaw, C. H., 690 Melbourne Ave., Westboro, Ont., Canada
Hertzberg, A., 149 E. 165 St , New York, N Y
Hunter, D O., WMAL, Cedar Lane, Bethesda, Md.
Irwin, E. M., 180 E. California St., Pasadena, Calif.
Jacob, D. M., 404 Root Ave., Scotia, N. Y.
Jackson, C. L., 2402 S. Charlotte Ave., San Gabriel, Calif.
Jewell, E. D., 1037 Redgate Ave., Norfolk, Va.
Kaye, H., 169 Bay 26 St., Brooklyn, N. Y.
Kennedy, F., 10 Follen St., Cambridge, Mass.
Kline, M. B., 179 Ocean Pkway, Brooklyn, N. Y.
Kritz, J., 2437—65 St., Brooklyn, N. Y.
Kronenberg, M. H., 306 Fourth Ave., Asbury Pk., N. J.
Kullberg, J. E., 620 Garfield, St., Laramie Wyo.
Kunz, J. G., Limekiln Pike and Summit Ave., North Hills, Pa.
Kurz, A. A., Napier Field, Dothan, Ala.
Lane, C. A., Jr., Radio Laboratory, Navy Yard, Mare Island, Calif.
Lanskail, R. B., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
LaRock, J. P., 3147—30 St., Astoria, L. I., N. Y.
LaSalle, J. P., 383 Harvard St., Cambridge, Mass.
Leaver, E. W., 215 College St., Toronto, Ont., Canada

(Continued on page liv)

A new building of the Bell Telephone Laboratories

Reason for Confidence

More than ninety per cent of American scientists are engaged in beating the Germans and Japanese.

More than ninety per cent of American scientific laboratory facilities are devoted to the same task.

American scientists are working at this job six or seven days a week, long hours, with few interruptions.

They are getting somewhere, too.

Every now and then the Germans and the Japanese have an unpleasant surprise.

They find that American science has caught up with them and passed them.

It is reassuring to us and discouraging to our enemies, for American scientific facilities are the greatest in the world. And they are functioning.

Little by little, some of the things that have been developed become public, but most of them you won't hear about until after the war.

But now, without the details, you can have faith that American research — industrial and academic combined — is rapidly giving our fighting forces an advantage.

Along with other American industry the Bell Telephone System has its own Bell Laboratories — the largest in the world — working overtime for victory.

BELL TELEPHONE SYSTEM

Your continued help in making only vital calls to war-busy centers is a real contribution to the drive for victory

SHALLCROSS ROTARY TAP SWITCHES USE SOLID SILVER CONTACTS, BECAUSE SOLID SILVER . . .

1. Has the highest conductivity of materials available.
2. Is superior to silver-plating which wears off, resulting in high resistance contacts.
3. Should it corrode the sulphide formed does not appreciably increase the contact resistance.

Let Shallcross answer your switch problems
Address Dept. C 23

WHY "SHORTING" AND "NON-SHORTING" SWITCHES?

This is the shorting type. As the arm is rotated from one position to another the adjacent contact points are "shorted" (bridged).

This is the non-shorting type. As the arm is rotated from one position to another, the arm lifts up, and only one contact is touched at a time.

Creators and Makers of

ACCURATE RESISTORS—SWITCHES—SPECIAL EQUIPMENT AND SPECIAL MEASURING APPARATUS FOR PRODUCTION AND ROUTINE TESTING OF ELECTRICAL EQUIPMENT ON MILITARY AIRCRAFT . . . SHIPS . . . VEHICLES . . . ARMAMENT . . . AND WEAPONS

SAMA

SHALLCROSS MFG. CO.

COLLINGDALE, PENNA.

New Equipment Notes

New Vacuum Switch

The FA-15 vacuum switch recently announced by the *General Electric Company of Schenectady, N. Y.*, will perform many general-purpose switching operations with high-speed operation, low operating pressure, long contact life, and rapidity of cnuerrt interruption.

Totally enclosed in a vacuum these switches offer many advantages; operation is unaffected by atmospheric conditions, contacts are free from contamination, and resistance remains low. The totally enclosed construction eliminates arcing at the contacts.

The low operating pressure, the fact that only a few thousandths of an inch movement is required to interrupt the rated current, and the light weight of the moving parts account for the very small amount of power required to operate the device. These are characteristics which render these switches highly suitable for application to high-speed relay construction, to d-c circuits involving high inductance, for use in installations which require that a circuit be opened by a very slow movement, and for many other applications where these features will result in efficient, dependable operation over a long period of time.

Kilovoltmeter

The Shallcross Manufacturing Company presents the following design bases for its "Kilovoltmeter"—a high-voltage measuring instrument.

In general the amount of current that is available for metering a high voltage circuit is quite limited. If ordinary voltmeters are employed, in many cases their current drain is so great that the accuracy of the

measurements is impaired. The specifications of an efficient instrument for measuring high voltages are stated to be:

(Continued on page xxvi)

...For lack of a Tube

The Big "B" was limping home over the water with two motors shot away. Too far gone to reach the home field. No visibility for a navigational fix.

Radio Op was trying to locate a closer field when a tube went dead. Which one? No time to test. He yanked out all the tubes. Started putting in a spare set.

But one of the tubes he jerked out was a "special selection." The replacements didn't work. The big bomber never got that bearing. And $350,000 worth of fighting ship drowned in the Pacific.

The moral? If you are a designer of radio and radio-electronic circuits for our armed forces, you can avoid the use of special selection tubes in 99 cases out of 100.

There's hardly a radio-electronic circuit today that can't be designed to function perfectly with standard tubes.

You might need two of these in place of one "special selection," but standardization makes it worthwhile.

We can and do supply "special selections" but only when authorized by the Army or Navy. Even then your special selection will interfere with the mass production and delivery of our standard tubes — and today time is the essence.

So why not first find out if the circuit you're working on now, can't be designed without the use of "special selections"? Our staff of application engineers is always ready to help you solve your design and manufacturing problems — and they can help you avoid "special selections"!

RCA

RCA RADIO TUBES

RECEIVING TUBES • POWER TUBES • CATHODE-RAY TUBES • SPECIAL-PURPOSE TUBES

RCA Victor Division, **RADIO CORPORATION OF AMERICA**, Camden, N. J.

Keep your eye on this lad Mr. Manufacturer

A FEW MONTHS AGO he was just a normal, untrained, happy-go-lucky kid. Today he's been well trained by Uncle Sam's Signal Corps into a competent technician, fit to take the responsibility on which hundreds, maybe thousands of lives depend. When he comes marching up Broadway in a shower of ticker tape, be ready to grab him—he'll be a valuable man.

And if he tells you that communications and electrical equipment made here at C. T. & E. is the last word in advanced engineering and rugged dependability, pay heed—you'll be listening to the voice of experience. You see, there's "Connecticut" equipment on the job almost everywhere United Nations forces are fighting.

GET THE MESSAGE THROUGH

CONNECTICUT TELEPHONE & ELECTRIC DIVISION

ARMY E NAVY

GAI

MERIDEN, CONNECTICUT

New Equipment Notes

(Continued from page xxiv)

1. Low current consumption. Not more than 1 Milliampere.
2. Completely self-contained. All multiplier units to be an integral part of the instrument.
3. Three ranges, 5, 10 and 20 Kilovolts, in a single instrument.
4. Plus or minus 2 per cent accuracy at full scale.
5. Sensitivity of the movement to be 1000 ohms per volt.
6. Rugged . . . portable.

All of these requirements are more than adequately met by the No. 760 Shallcross Kilovoltmeter as designed and manufactured by *The Shallcross Manufacturing Company of Collingdale, Pa.* The multiplier unit contains Shallcross accurate wire wound resistors mounted on ceramic insulators, and the entire unit is enclosed in an oak case. Shallcross Kilovoltmeters of this type are used in Governmental and Industrial Laboratories for measuring both a-c and d-c high potentials and for voltage breakdown testing in production work.

Ceramic Condenser

Erie Resistor Corporation announces a new type ceramic condenser that is stated to combine unusual compactness and high capacity. Known as Erie Disc Ceramicons, these capacitors provide all the inherent properties of ceramic dielectrics, such as low loss, capacity stability and excellent retrace characteristics.

They are made in two sizes, basic type 1770 which is $\frac{3}{4}''$ in diameter and basic type 170 which is $1\frac{1}{16}''$ in diameter. Height of the units vary in accordance with capacity, the maximum height, excluding mounting stud and terminal is $\frac{3}{4}''$.

Type 1770 is rated at 500 volts d.c. working and is available in any standard

(Continued on page xxviii)

one style case...

THE ADVANTAGES OF A COMPLETE LINE HOUSED IN A SINGLE MOUNTING STYLE

STANCOR Professional Series Transformers' case design combines a smart appearance and uniform pattern with rugged mechanical construction. The reversible mounting feature increases the range of application. Uniform mounting centers are maintained for each case size; thus, accurate chassis punchings may be made with assurance of easy installation or replacement.

This line of Stancor transformers combines sound engineering with highest quality materials and precision manufacturing. No sacrifice of quality is tolerated.

For further information write for catalog No. 240

STANDARD TRANSFORMER CORPORATION
1500 NORTH HALSTED STREET • CHICAGO

DIMENSIONS
Professional Series Transformers

Case Type	H	W	L	MW	ML
RA	2⅞"	2"	2⁷⁄₁₆"	1⁹⁄₁₆"	2¹⁄₃₂"
RB	3¹⁄₁₆"	2⅜"	2¾"	1¹³⁄₁₆"	2⅛"
RC	3⅝"	2⁹⁄₁₆"	3¹⁄₁₆"	1¹⁵⁄₁₆"	2⁷⁄₁₆"
RD	3⅞"	3"	4½"	2⁷⁄₁₆"	3⅞"
RE	5"	3⅞"	5"	3³⁄₁₆"	4⁵⁄₁₆"
RF	5"	4½"	5"	3²⁷⁄₃₂"	4⁵⁄₁₆"
RG	5"	5⅛"	5"	4½"	4⁵⁄₁₆"
RGA	7⅛"	5¹¹⁄₁₆"	6⁹⁄₁₆"	4¹³⁄₁₆"	5¾"
RH	9"	7½"	7"	6½"	6"
RJ	9"	8¾"	7½"	7¾"	6½"
RK	9"	8¾"	9"	7¾"	8"
RL	13"	8¾"	10"	7¾"	9"

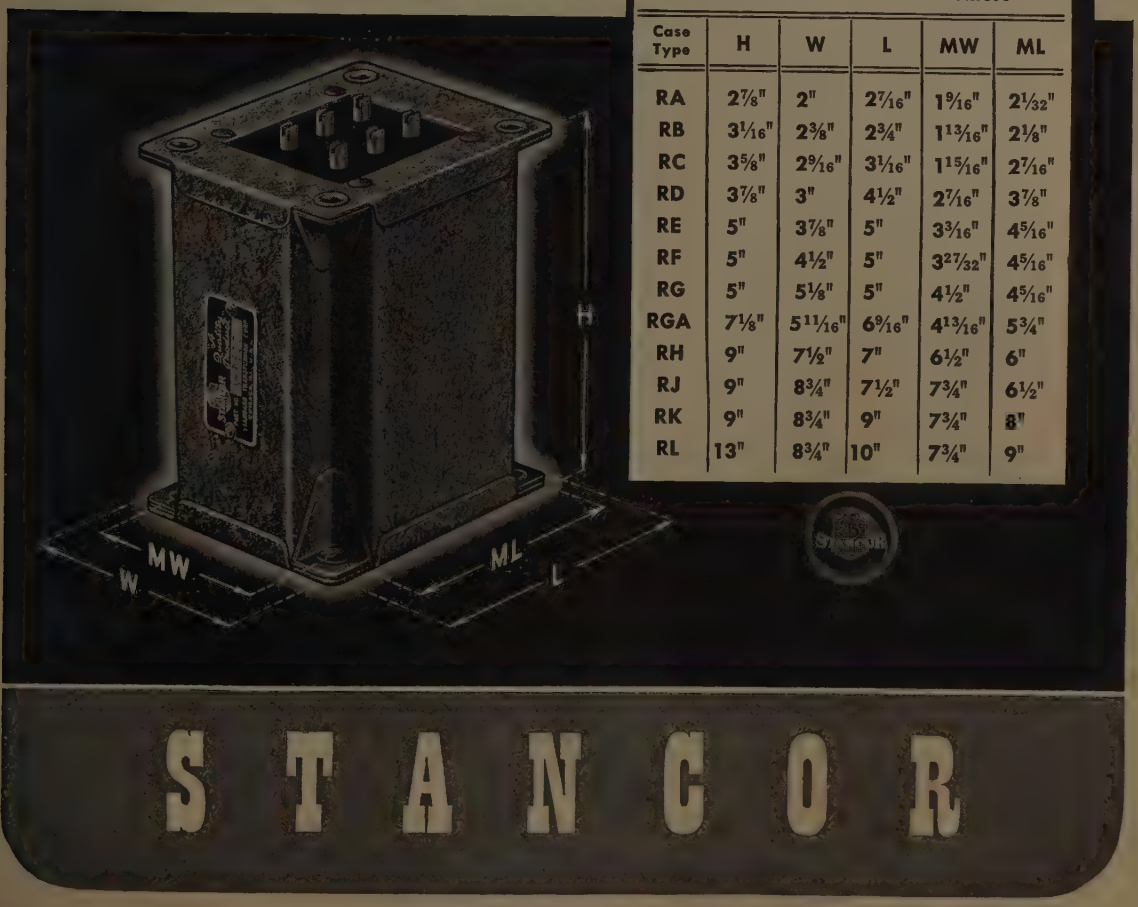

STANCOR

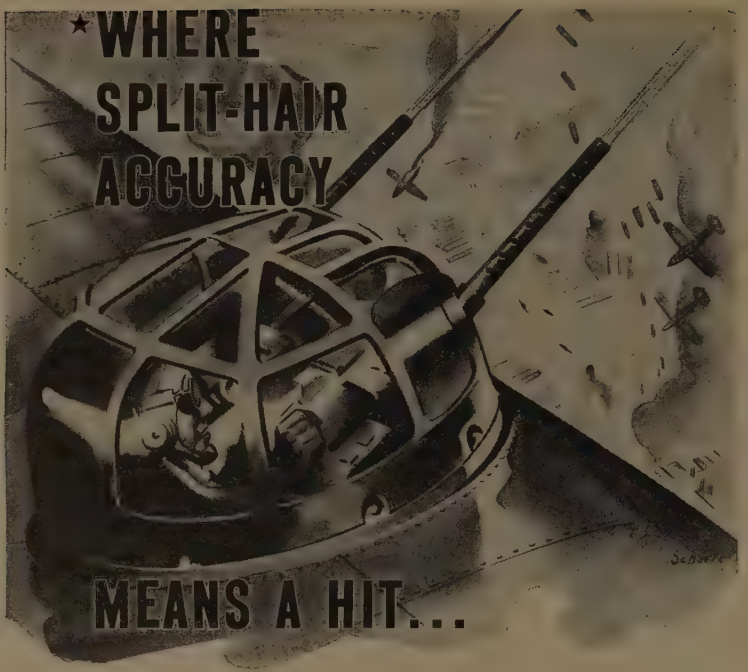

Shown below is a Utah Potentiometer for power-driven machine gun or cannon aircraft turrets. This gunner has feather-touch control of his guns' position—no matter from which direction the enemy may attack. In this precision operation, the Utah part plays a vital role. It has been fitted for that role by split-hair accuracy in manufacture. This is only one of many Utah products now in service with the armed forces.

When there's a Messerschmitt on his tail, equipment must operate with the precision of a fine watch. That's when a "Fortress" gunner appreciates flawless construction. Precision work, however, is no stranger to the Utah factory. Their outstanding reputation in the radio and electrical industries has been built on precision manufacturing. Advanced Utah engineering has kept ahead of requirements. The dependability of Utah parts—long a by-word among radio men and in industrial plants—is now being proved in all parts of the world.

If you have a problem, calling for precision electrical parts, why not take advantage of Utah's extensive experience? Utah makes a complete line of Potentiometers, Rheostats and Attenuators—as well as other electrical parts. Write today for complete information—and see what Utah precision manufacturing and advanced engineering can do for your product. There is no obligation.

UTAH RADIO PRODUCTS COMPANY
842 Orleans Street • Chicago, Illinois
Canadian Office: 838 King St., W., Toronto • *In Argentine:* UCOA Radio Products Co., SRL, Buenos Aires • *Cable Address:* UTARADIO, Chicago

Utah

UTAH WIRE-WOUND CONTROLS, RELAYS, JACKS, RESISTORS, PLUGS, SWITCHES, MOTORS

New Equipment Notes

(Continued from page xxvi)

temperature coefficient from ±120 (P120) to −750 parts per million per degree C. (N750). Maximum capacity at zero temperature coefficient (NPO) is 1,000 mmf and is approximately 7,000 mmf in N750.

Type 170 is rated at 1500 volts d.c. working. Maximum capacity in NPO is 400 mmf, and 1750 mmf in N750.

Erie Disc Ceramicons can be supplied in a wide variety of mounting studs and terminals. The design of these condensers is such that their resonant frequency is considerably higher than that of conventional condensers, an important characteristic for ultra-high frequency applications. The Disc Ceramicons are hermetically sealed, to provide maximum protection against humidity.

Copies of a data sheet showing various styles of available mounting studs and giving electrical characteristics of Erie Disc Ceramicons can be secured by writing *Erie Resistor Corporation, Erie, Pennsylvania.*

New Voltage Stabilizer

The General Electric Company has announced a new voltage stabilizer which provides a constant output of 115 volts from circuits varying between 95 and 130 volts. This stabilizer is insensitive to load power factor. It is not affected by variations in load from no load to full load or by changes in power factor from unity to 0.8 lagging. It is completely self-protecting, and will operate continuously throughout the range from open circuit to short circuit without damage.



The new stabilizer can be applied wherever close voltage regulation is requisite to good operation—for example, in radio transmitters, electronic-tube apparatus, motion-picture sound equipment and projectors, photo-cell equipment, and in the calibration of meters, instruments and relays. Ratings from 50 va to 5000 va are available. Publication GEA-3634 describes the new voltage stabilizer in detail.

New Television Manufacturer

It is stated by the President of the recently-formed Scophony Corporation of America, Arthur Levey, that large screen television projection and easy adaptability to color will presently be available to American television enthusiasts in the home, schools, churches, restaurants and motion picture theatres under the British patent rights controlled for the entire

(Continued on page xxx)

On Time! QUICKER DELIVERY FOR STEATITE INSULATORS

Not so long ago, an order for Steatite Insulators brought a sympathetic shrug of the shoulders and a "Sorry, five to six months delivery." We did not like to tell our customers that. We did not like it because we knew how badly Steatite was needed for the war effort.

This is what we did to quicken deliveries of Steatite Insulators.

- Expanded our plant facilities.
- Enlarged our staff of engineers and technicians.
- Devised improved methods of production.

As a result, there rolls from our kilns every month increasing quantities of insulators. Gradually, but surely the backlog of orders was reduced. Now we can promise our customers deliveries on standard parts from stock in a reasonably short time.

If you have any insulator problem—whether specialized or standard — we would like a shot at it. You can rest assured that your requirements will receive prompt, individual attention.

Above . . . stock insulators such as these are now available in quantity for prompt delivery. Write for data concerning the many different types of Steatite Insulators.

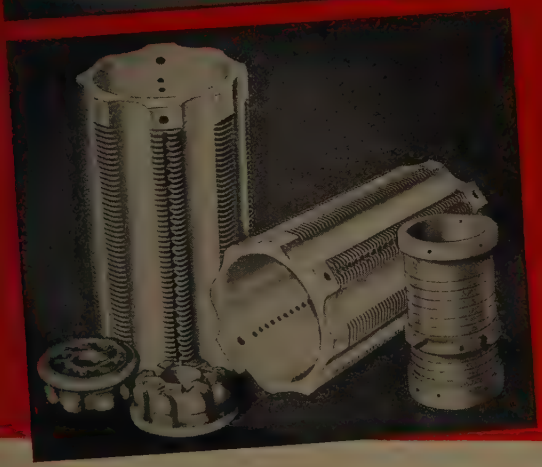

Left . . . these coil forms and insulators were designed and pressed for special applications where stock insulators would not serve. They are working examples of the engineering skill available for your special insulator problem.

General Ceramics

GENERAL CERAMICS & STEATITE CORPORATION — STEATITE INSULATORS

AND STEATITE CORP.

KEASBEY NEW JERSEY

. . . the Highest Standard in Magnetic Measurements

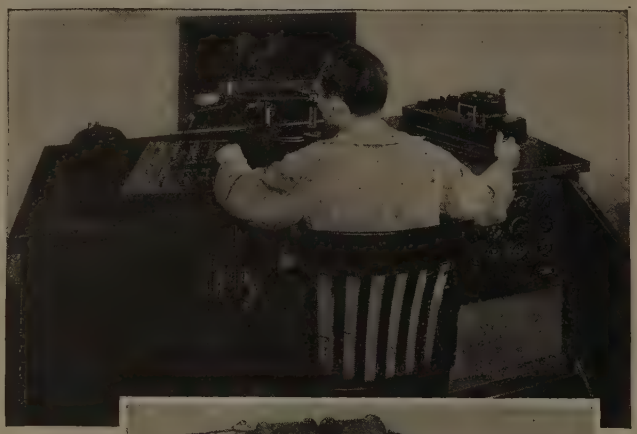

To maintain a high degree of uniform magnetic quality and precision, Arnold engineers use The *High H Permeameter* (illustrated) *. . . a duplicate of the Permeameter in use at the National Bureau of Standards* . . . just one example of the close magnetic control under which the Arnold magnets are manufactured.

All ALNICO types of Permanent Magnets . . . including ALNICO V . . . are completely fabricated in the Arnold plant under exacting metallurgical, mechanical and magnetic control.

Arnold engineers are available to solve your magnetic design problems . . . all inquiries will receive prompt attention.

THE ARNOLD ENGINEERING COMPANY

147 EAST ONTARIO STREET • CHICAGO, ILLINOIS

PRODUCERS OF MAGNETS FOR AIRCRAFT, MARINE, RADIO, ELECTRICAL AND OTHER TYPES OF MEASURING INSTRUMENTS

★ ★ ★

For Victory . . . invest at least 10% in War Bonds

New Equipment Notes

(Continued from page xxviii)

Western Hemisphere by the new company. Formed as a completely independent American organization, the initial board of directors consists of Joseph E. Swan, Banker, partner in E. F. Hutton & Co., New York City; Franklin Field, director of the Piper Aircraft Company and Chief Operations Advisor, Outpost Division of the OWI; Paul Raibourn, President of Television Productions Inc., a subsidiary of Paramount Pictures Inc.; Earle G. Hines, President of General Precision Equipment Corporation; and Arthur Levey, one of the founders and director of Scophony Ltd., of London and president of the new American television company.

The "supersonic" system of television projection developed during fourteen years of research and the expenditure of several million dollars in England will be among the utilized methods. This type of projection was used successfully for more than eight months in two London theatres prior to the outbreak of the war. A successful demonstration of this unique method was also made at the Rialto Theatre, New York, on June 21, 1941.

Working models of the various "supersonic" projectors, including the projector giving an 18 foot television picture, used at the Odeon Theatre in London, are now in New York under the care of S. H. Dodington, chief of the British company's electrical staff.

Supersonic projection differs in numerous respects from the electronic projection used in all other American television systems. It was discussed in some detail in the August, 1939 issue of the PROCEEDINGS of the I.R.E.

Headquarters of the *Scophony Corporation of America* are at *527 Fifth Avenue, New York, N.Y.*

Emby Changes Name

Emby Products Company, Inc., announces a change in name to *Selenium Corporation of America*, for the purpose of indicating the increased scope of manufacturing activities. Located at 1800–1804 West Pico Boulevard, Los Angeles, the company manufactures instrument and relay rectifiers, photo-electric cells and other related scientific products.

Among the officers of the Corporation is Eric Lidow, Vice President and Chief Engineer, active in the design of rectifiers and photo-electric cells and associated with that industry since 1933.

Manufacturing facilities have been greatly enlarged during recent months to meet the increasing demand for these products. Special attention is being given to new rectifiers which are stated to have extreme compactness, instantaneous response, ability to withstand overloads as high as 1000% without permanent injury, complete protection against low pressures at high altitudes, increased efficiency at higher temperatures and positive insulation against atmospheric disturbances, a 30% saving in weight.

"Survivors sighted . . proceed to rescue"

Through the blue comes the message that tells men in the air what to do . . . where to go. These messages must not, *cannot,* fail, for the whole operation of our Army and Navy Air Forces depends upon the vital artery, Communications.

Streamlined for this most exacting job, ROLA is devoting all of its facilities and its energies to the production of wartime electronic equipment — transformers, headsets, choke coils, and related devices. And, thanks to its long experience in this field, ROLA has been able to develop machines and methods to speed production, prevent spoilage and improve performance . . . all to the end of better communications for our fighters in the air.

Today, all these developments belong to the War Effort. Later, we are confident, they will be of great significance in the field of peacetime Electronics.

Rola has done an outstanding job, both as prime contractor, and as subcontractor for other manufacturers and it can further utilize its expanded plant equipment, its increased knowledge and skill, in the War Effort. If you have a subcontracting problem, we suggest you write us, or ask our representative to call. THE ROLA COMPANY, INC., 2530 Superior Avenue, Cleveland, Ohio.

★ ROLA ★

MAKERS OF THE FINEST IN SOUND REPRODUCING AND ELECTRONIC EQUIPMENT

DELIVERY EMERGENCY?
Model illustrated is used with Neon T-4½ ¼ Watt bulbs.
PILOT LIGHT ASSEMBLIES needed "overnight"? Call on DIALCO at once! Co-operation in meeting emergencies is the keystone of our service. . . .
Write us about your problem now, attention Dept. D-41.
DIALCO
WE MANUFACTURE WARNING AND SIGNAL PILOT LIGHT ASSEMBLIES FOR ALL ELECTRONIC OR ELECTRICAL APPLICATIONS . . . SEND US YOUR SPECIFICATIONS AND DELIVERY SCHEDULES . . . YOU'LL GET QUICK ACTION!
DIAL LIGHT CO. of America INC.
90 WEST STREET • NEW YORK, N.Y.

Utilization of Manpower

The Radio and Radar Division of the War Production Board has made available on February 4, 1943 a memorandum or "Manual of Manpower Procedures" which will be of interest to production engineers in this field. It has been prepared particularly for manufacturers of electronic equipment, components, and industrial instruments. Pertinent portions of the memorandum follow. [Editor]

- - - -

With the increasing demands made upon our Industry because of the size and complexity of the military production program this year—demands for increased production with a decreasing labor and technical labor supply—the greatest care should be taken to plan a manpower program which will insure a steady flow of equipment from the factories to those agencies requiring this equipment for the effective prosecution of the war.

The information in this memorandum supplements that sent to electronics manufacturers by the Army-Navy Electronics Production Agency on November 25, 1942 (its Memorandum No. 21) and is intended to bring you up to date on methods of treating manpower problems.

Certain procedures must be followed if our program is to be fulfilled; certain steps, immediately taken if labor shortages are to be avoided within the next few months. This important fact is to be taken into consideration in planning a manpower program—except for an extremely limited number of persons who are physically handicapped or of seriously critical value to war work, it is probable that the Armed Forces will require the services of all men between the ages of 18 and 38.

Steps which should be taken in view of this fact may be summarized as follows:

1. Determine the character of the labor force, qualitatively and quantitatively.
2. Plan for replacing expected losses in the labor force.
3. Plan for retaining those members of the labor force for whom replacements cannot be trained.
4. Maintain labor standards.
5. Maintain good labor relations.

1. *The Character of the Labor Force*

The War Manpower Commission has requested producers of war materials to prepare a manpower inventory. The Manning Table is the device for accomplishing this purpose. In the pamphlet describing the Manning Tables, the War Manpower Commission states:

> "The major purpose of the Manning Table Plan is to indicate the form in which the employer should keep the record of his labor force, so as to provide a basis for planning the orderly withdrawal of workers from his industry into

(Continued on page xxxiv)

SOLIDS FROM POWDERS *in 30 seconds!*

...TO HELP SOLVE DESIGN, PRODUCTION AND PRIORITY MATERIAL PROBLEMS

Typical Stackpole Molded Products

- Brushes and Contacts (*all carbon, graphite, metal and composition types*)
- Rare Metal Contacts
- Powdered Iron Components
- Anodes
- Electrodes
- Brazing Blocks
- Bearings
- Welding Rods, Electrodes, and Plates
- Pipe
- Packing, Piston and Seal Rings
- Rheostat Plates and Discs
- Brake Lining, *and numerous others*

Stackpole Electronic Products

- Fixed and Variable Resistors
- Switches
- Molded Iron Cores

Outstanding among current developments is the rapid increase in the use of solids molded from powders. Not only do these include the better-known types of carbon, carbon graphite and similar compositions but, of steadily growing importance, are the countless parts formed from molded iron and iron-nickel powders. Savings in machining operations, faster production, and the frequent ability to utilize less critical materials are outstanding among the advantages involved.

As a leader for over a third of a century in the molding of solids from powders, it is only natural that Stackpole today should be headquarters for the latest developments—whether they entail powder iron metallurgy, or the forming of rare metal contacts from powders, a field in which Stackpole developments have set new standards of performance.

A vast fund of accumulated engineering knowledge backed by exclusive processes is here available to manufacturers whose products may be made better or produced faster by the use of molded carbon, iron, or rare metal components.

STACKPOLE CARBON COMPANY, *St. Marys, Penna.*

STACKPOLE

MOLDED CARBON AND METAL PRODUCTS

MIRACULOUS MINUTENESS in EMBY Selenium

Instrument Rectifiers Engineered for Engineers

EMBY Instrument Rectifiers have specially treated metal electrodes and use the uni-polar conductivity of metal to selenium junction. Rectification is instantaneous—no warm-up period required. No moving parts. Shock proof. Permanent characteristics. Unlimited life. Increased efficiency with increased temperature. Temperature range, —70 to +70°. Unaffected by severe atmospheric conditions. Sealed-off units supplied for aircraft service. Series "N" and "S" have satisfactory frequency characteristics and can be used in the frequency range up to 100 kc.

N-2

Input 5 volts. Half wave. Continuous dc current 1 ma. Used with meters, detector circuits, bias voltage.

H-SM

Input 5 volts. Half wave. Continuous direct current 8 ma. Numerous field applications.

B-SM

Input and output same as H-SM, but has two rectifying elements connected in series.



DS

Input 10 volts. Full wave Bridge. Continuous dc 10 ma. Unbreakable plastic case with mounting extension.

CENSORED

Input 10 volts. Full wave. Continuous dc rating 35 ma. Mounted in [redacted]



DL

Input 10 volts. Full wave Bridge. Continuous dc rating 35 ma. Mounted in aluminum case with mounting extension.

P-1-M

Input 10 volts. Continuous dc rating 50 ma. Mounting extension available if specified.

CENSORED

Input 10 volts. Continuous output rating 80 ma. Designed for [redacted]

ALL ILLUSTRATIONS ACTUAL SIZE

Send for Bulletin with complete specifications. (Bulletin No. 10 on Self-generating Photo-Electric Cells is also available.)

SELENIUM CORP. OF AMERICA

Manufacturers of EMBY Rectifiers, Photo-Electric Cells and allied scientific products

1800-1804 West Pico Blvd. Los Angeles, California

Utilization of Manpower

(Continued from page xxxii)

the Armed Forces of the country with the least possible disturbance to production.

"Both trained fighters and trained workers are essential to the winning of the war. Trained fighters, however, are more restricted as to age, sex, and physical condition than are workers. The needs of the Armed Forces will compel the eventual induction into active service of practically all men who can meet the age, physical and other requirements. These men must be released by industry. The Manning Table Plan provides the basis for the withdrawal of such workers at a rate that will allow others not suitable for active service to be trained to replace them."

No doubt most manufacturers have already received copies of the Manning Table instruction circulars. If not, they should be requested immediately from the Regional Offices of the War Manpower Commission located in any of the cities listed in Schedule "A" or the ANEPA expediter, if one is assigned to your plant.

Proper preparation of the Manning Table will supply the following facts:

1. The different kinds of jobs in the plant or activity.
2. The number of workers necessary to do each kind of job.
3. The type of worker suited to do each job and the possibility of substituting other workers of less skill.
4. The amount and kind of training needed to train an unskilled worker to do each job.
5. The training methods which often result in improved training techniques.
6. The jobs in which women are employed and also those in which women could replace men.
7. The information needed for forecasting labor requirements in connection with anticipated production programs; e.g., if the output of the plant is to be raised 30%, an accurate estimate can be made of the number and kinds of workers that will be needed to accomplish this increased production.
8. Job relationships and a logical chain of promotion or upgrading.
9. Unbalance between number of skilled workers and unskilled, or workers and supervisors.
10. Jobs where physically handicapped or disabled persons can be used.

Using the Manning Table or inventory as a basis, a Replacement Schedule will be prepared which provides for replacing men in each job classification and indicates the time within which the replacement can be accomplished. Full consideration will be given to each registrant's replaceability and to the time when he would normally be inducted into military service according to his Selective Service status.

When the Replacement Schedule has been submitted to the State Director of Selective Service of the State in which the plant is located, and the State Director has approved the schedule, he will assign a "State Acceptance Number" to the employer. The employer will then be authorized to use this State Acceptance Number and to place a prescribed State Acceptance Stamp on the Form 42A or Form 42B, depending on the employee's dependency status, indicating that the time for replacement of the employee shown on the Form is in accordance with the Replacement Schedule accepted by the State Director.

An accepted Replacement Schedule indicates that careful consideration has been given by the employer, by the State Director, and possibly by other Governmental agencies, to the employment requirements of the particular plant and the time required to replace the workers in each job classification.

The matter of deferment on occupational grounds rests with the Local Boards and Boards of Appeal in all questions of individual classification. Local Boards will, however, give serious consideration to the replacement time which has been determined under an accepted Replacement Schedule.

Full details and sample Replacement Schedule forms may be obtained from Selective Service Regional Field Officers or State Directors.

2. *Plan for Replacing Expected Losses in the Labor Force*

With a clear picture of the composition of the labor force, it will now be possible to plan for replacing those persons who are expected to leave.

It has been effectively demonstrated that systematic training procedures are more effective in breaking-in employees on new jobs than are the traditional hit-or-miss practices. Within the War Manpower Commission there are a number of agencies which are equipped to give employers expert and specialized training assistance at no cost to such employers. The public vocational schools and the National Youth Administration can be utilized in providing training for new workers on single-skilled jobs. The Training-Within-Industry Service, and the Apprenticeship and Training Service may be utilized in providing training for the upgrading of workers to positions of greater responsibility. The Engineering-Science-Management-War Training Program can be utilized to provide training for production workers such as engineers, chemists, and production supervisors. These are not all of the training services available. *It is urged that the Director of Training of the nearest regional office of the War Manpower Commission (listed in Schedule "A") be consulted for specific information with regard to any training problems.*

In addition to obtaining the services of new employees through training procedures, employers should be careful to extend the practice of utilizing the services of women wherever it is possible to substitute them in jobs now filled by men. Handicapped persons, who have not been employed in the past, should be given oppor-

(Continued on page xxxviii)

Booklets

FORMEX MAGNET WIRE • • • *The General Electric Company at Schenectady, New York,* has just issued a 28-page booklet entitled: "Formex Magnet Wire." It is designated as booklet GEA-3911. Quoting from the booklet:

"Some years ago study of the problem of improving the insulation of magnet wire indicated that because an enamel film has inherently high dielectric strength and takes up little room, efforts should be made to better its mechanical properties. Although minor improvements had been made by the addition of synthetic resins to the oil enamel, major improvements in the physical properties of the film were apparently not to be attained so long as drying oils were the major ingredient. Hence, attention was turned to the production of a wire insulated with a thin film of synthetic resin. After considerable research and development, an insulated wire embodying a thin film of synthetic resin of the polyvinyl-acetal type was produced which was vastly superior in many respects to wire insulated with conventional enamels.

"The usual difficulties experienced in adapting any laboratory process to factory production were encountered and overcome; and now wire insulated with a film of synthetic resin embodying polyvinyl acetal (wire manufactured by General Electric under its trade-mark, Formex) is in extensive production and use."

The booklet stresses the folllwing desirable properties of the new wire: higher winding-space factor, outstanding moisture resistance, higher heat conductivity, higher dielectric strength per mil, and lower cost. It is claimed to avoid the following undesirable properties of fabric-covered types of magnet wire: comparatively weak resistance to abrasion, heat-shock cracking, and lack of resistance to solvents and treated compounds.

The booklet on Formex wire discusses in considerable detail such properties of the wire as dielectric strength, power factor (including abrasion resistance, flexibility, resistance to heat shock, and adhesion of film) heat aging, shelf aging, temperature rating, thermoplastic flow, moisture resistance, and solvent resistance. The economies of the wire in connection with its favorable winding-space factor, increased number of feet per pound, lower cost, and ready use under manufacturing conditions are discussed.

The wire is available in round and rectangular shapes and may be supplied in various colors. Its properties are illustrated by a group of comprehensive tables.

Application notes on the wire are given including methods of making connections (stripping, flame and wire brushing, soft soldering and welding), varnish treatment, and baking practice.

±.00WHAT?

EVERY Jackson electrical instrument — multimeter, tube tester, signal analyzer, or whatever — is built to one simple design principle: specified limits of accuracy under anticipated service conditions. In other words, Jackson instruments are built to fit the job, right down to the last detail . . . You can, if you will, call this business integrity — or plain common sense. Either way, Jackson users appreciate the fact that their measurements can be relied upon, consistently . . . While all Jackson products manufactured today are going to war — fast — we are maintaining a wartime maintenance and repair service for all our customers. Feel free to consult us on any problems concerning equipment you now have, bearing our trade-mark.

★ ★ ★

All Jackson employees — a full 100% — are buying War Bonds on a payroll deduction plan. Let's all go all-out for Victory.

JACKSON

Fine Electrical Testing Instruments

JACKSON ELECTRICAL INSTRUMENT COMPANY, DAYTON, OHIO

Four-unit tandem control comprising two standard Clarostat 50-watt power rheostats in rigid cradle mounting, and two wire-wound potentiometers with high-voltage insulated coupling.

Special . . .

yet made up with standard controls

★ Another control problem of the kind Clarostat engineers like, came in recently. Specifically: a tandem assembly comprising dual 50-watt power rheostats and dual 3-watt wire-wound potentiometers; the latter insulated from shaft and ground for 2000-volt breakdown test; four units to have the same degree of rotation.

In a hurry, of course. First a sample. Then immediate production running into large figures.

Clarostat engineers worked out the assembly here shown from standard units and parts, again demonstrating how time, money and effort are saved by ingenious adaptation of the Clarostat wide choice of standard units and parts to very special requirements.

Send us your resistor problem . . .

Our engineers will try to solve it—with standard items, adaptations of standard items and parts, or with special designs where rarely necessary.

CLAROSTAT *Controls and Resistors*

CLAROSTAT MFG. CO., Inc. · 285-7 N. 6th St., Brooklyn, N. Y.

Membership

(Continued from page xxii)

Leick, J. S., Jr., 23 Chestnut St., Newark, N. J.
Levy, S., 1008 E. 172 St., Bronx, N. Y.
McCredie, C. J., 5815 S.E. 21 Ave., Portland, Ore.
McDowell, W. E., 321 Raleigh St., S.E., Washington, D. C.
McFatridge, J. E., 207 Riverside Dr., Detroit, Mich.
McGaughey, J. R., Fleet Service School, Virginia Beach, Va.
McGoldrick, J. P., II., S. 2808 Scott St., Spokane, Wash.
McLaren, I. H., Radiation Laboratory, M. I. T., Cambridge, Mass.
Mead, R. S., TWA, Hanger 2, National Airport, Washington, D. C.
Meridith, R. R., 10213 S. Wood St., Chicago, Ill.
Montgomery, D. J., 312 Probasco Ave., Cincinnati, Ohio
Nelson, E. K., E. 734—39 Ave., Spokane, Wash.
Nelson, J. E., 1231 Garner Ave., Schenectady, N. Y.
O'Brien, T. J., Jr., E. 1417 Wellesley Ave., Spokane, Wash.
Ogilvie, A. R., 15 Lockland Ave., Westmont, N. J.
Ogren, V. G., 48 Highland Ave., Jersey City, N. J.
Osborn, G. H., Hanger 2, Washington National Airport, Washington, D. C.
Pack, H. G., Box 151 Redwood City, Calif.
Parker, B. E., RT. 2/c Flag Allowance, COMSERFORPACFLT Box 4, % Fleet P.O. San Francisco, Calif.
Parry, F. M., KTKN, Ketchikan, Alaska
Paulsen, W. H., 2045 Commonwealth Ave., Brighton, Mass.
Pratt, J. H., RCA Victor Co., Ltd., 976 Lacasse St., Montreal, Que., Canada
Reid, E. H., 410 E Vienna St , Clio, Mich.
Ricciotti, S., 645 N. Broadway, Shawnee, Okla.
Ringo, G. R., 800-C S. Washington St.,, Alexandria, Va.
Robb, G., 5401 Girard Ave., S., Minneapolis, Minn.
Robson, C. A., 1105 Elm St., Cincinnati, Ohio
Rocke, A., 100 Varick St., New York, N. Y.
Rook, C. W., University Station, Grand Forks, N. D.
Ross, G. A., 206 W. 21 St., New York, N. Y.
Rudicil, G M , 7138 Hollywood Blvd , Hollywood, Calif
Saling, D , 123–52—147 St , South Ozone Park, L. I., N. Y.
Samour, S., General Radio Co., Cambridge Mass.
Sampson, C. H., 9270 Airdrome St., Los Angeles, Calif.
Schultz, C. W., 2322 Ridge Ave., Evanston, Ill.
Shapiro, G., 602 Third Ave., Asbury Pk., N. J.
Smith, H. B., 860 N. 23 St., Philadelphia, Pa.
Spargue, R. E., 2019 Grand Blvd., Schenectady, N. Y.

Membership

Spratlin, J. W., 1592 S. Gordon St., S.W., Atlanta, Ga.
Stokes, J. H., 70 Hamilton Ave., Greenwich, Conn.
Storr, E. E., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Swanson, E. R., 3970 Arlington Ave., Los Angeles, Calif.
Taylor, T. T., 996 Eastern Ave., Schenectady, N. Y.
Tieman, C. R., Sig. Hq. & Hq. Co. VII F.C. APO 958, % Postmaster, San Francisco, Calif.
Tipton, H., R.C.A.F. Station, Shelburne, N.S., Canada
Turner, K. D., 3800 Cortland St., Chicago, Ill.
Ullman, D. A., NBC 724—14 St., N.W., Washington, D. C.
Watton, A., Jr., Propeller Laboratory, Engineering Division, Wright Field, Dayton, Ohio
Weinstein, M., 1201 Avenue K., Brooklyn, N. Y.
Westbrook, E. P., 953 Grant Ave., Rockford, Ill.
Westerdahl, S. B., Belgrano 975 esc. GyH Buenos Aires, Argentina
Whitlock, R. W., RT. 2/c U.S.S. *Charger*, K Division, % Fleet P.O.[6] New York, N. Y.
Williams, J. J., 29 S. Devoe Ave., Yonkers, N. Y.
Williams, K. B., 1371 Peabody St., N.W., Washington, D. C.
Wilson, W. A., 1729 Westmoreland Ave., Los Angeles, Calif.
Young, K. W. L., 151 Norwood Ave., Long Branch, N. J.

Saves 166,000,000 Pounds of Brass

The following was announced in Washington on February 23rd: For a design that saves 166,000,000 pounds of brass on the present procurement of M-20 A1 booster bodies, used in the firing mechanisms of 75 mm. and 105 mm. shells. Charles H. Godschall, manager of the Metal Division of Philco Corporation, and Lieut. Colonel D. L. Woodberry, Army Ordnance, have been officially cited by the Ordnance Department of the United States Army for making "a marked contribution to the vital war production program to conserve critical material and machines."

The savings of critical materials in the production of booster bodies resulting from the new Philco design would be the equivalent of a column of brass 24 feet square as high as the Washington monument.

To effect the savings, the threaded tube 2¼ inches in diameter and 1¾ inches long, was redesigned so that it could be made in two parts, the outer shell being a steel stamping and the insert produced from steel bar stock. With older methods the entire part was machined from brass bar stock or forging.

Engineering is now under way on a design to permit use of malleable iron castings as an alternate material.

Redesign of the booster body was carried out by Mr. Godschall in the Philco Metal Division with the aid and assistance of Lieut. Colonel Woodberry.

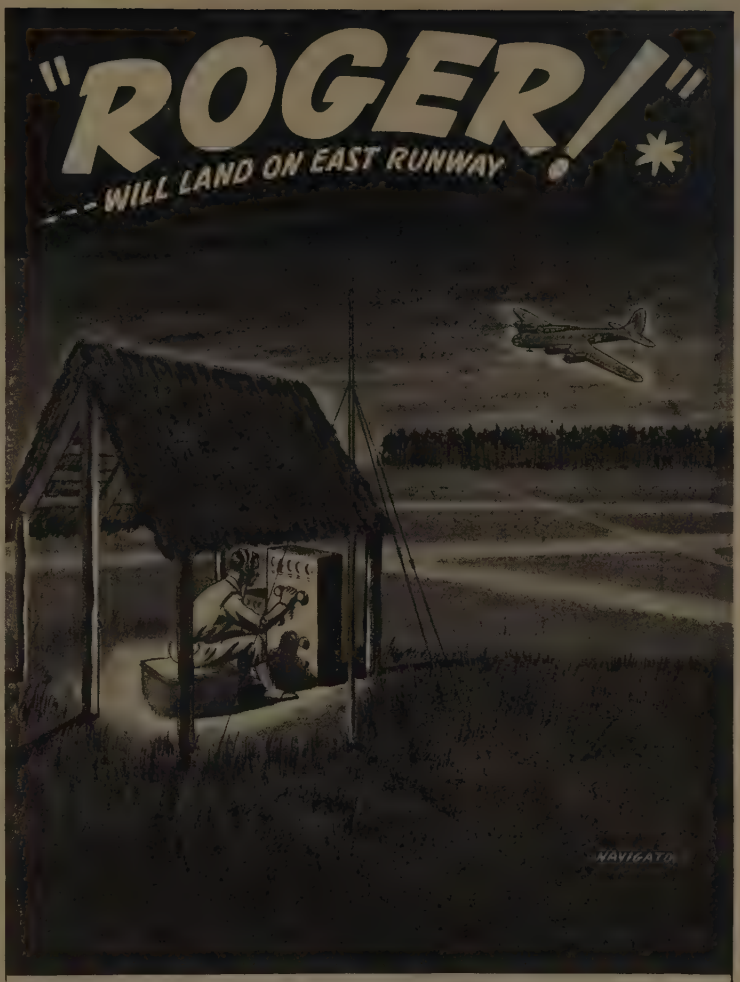

You Can't Work 'Em, If They Can't Hear You!

The work of Oxford Tartak Radio Engineers is helping to write a part of the achievement that is American Radio. Present production schedules call for the unusual—all of the equipment we are producing is *special*, made to do a top job under the most adverse conditions.

IN PRODUCTION

- AIRPLANE RADIO RANGE FILTERS
- AIRPORT RADIOPHONE TRAFFIC CONTROL TRANSMITTERS
- MOBILE RADIOPHONE TRANSMITTER-RECEIVER INSTALLATIONS
- PRODUCTION AND ELECTRONICS TEST EQUIPMENT
- MOISTURE-PROOF AND IMPACT RESISTANT LOUDSPEAKERS

And

Other "Difficult-to-manufacture" Electronic Items.

**Radio "Shorthand" for R or • — • meaning, "Your message received!"*

OXFORD-TARTAK RADIO CORP.

3911 S. MICHIGAN AVE., CHICAGO, ILL.

After the War ...What?

For many radiomen the end of the war will mean the end of a job. But for those with vision and foresight, the future offers golden opportunities. These are the men who realize that the responsible engineering positions will go to those who have acquired the ability and technical training to keep pace with the rapid strides being made by the radio and industrial electronics industries.

Now is the time to make sure of the road ahead. CREI home study courses in Practical Radio Engineering provide a planned program of spare-time specialized training to give professional radiomen the technical skill to supplement their present ability.

Being "too busy" is no excuse. CREI courses are designed to be studied in the most crowded schedules. Right now, more than 8,000 professional radiomen are training with CREI in their spare time to obtain security and advancement in various branches of radio.

It's not too late to start. Get all the important facts at once!

★

We will be glad to send our free booklet and complete details to you, or to any man whom you think would be interested.

CAPITOL RADIO ENGINEERING INSTITUTE

E. H. RIETZKE, *President*

Home Study Courses in Practical Radio Engineering for Professional Self-Improvement

Dept. PR., 3224—16th Street, N.W. WASHINGTON, D.C.

Contractors to the U. S. Signal Corps—U. S. Coast Guard

Producers of Well-trained Technical Radiomen for Industry

RADIO EDUCATION NOTES

Radio Instruction Course

In an effort to provide material of a substantial and constructive help to those interested in electricity and the vital functions performed by vacuum tubes in communications, *Sylvania Electric Products, Inc., of Emporium, Pa.*, have developed and produced a RADIO INSTRUCTION COURSE. The chief working tools in this course are three large wall charts lithographed in color. Chart #1 and #2 deal with the fundamentals of direct and alternating current respectively. Chart #3 is devoted to the fundamentals of the vacuum tube. Comprehensive lesson folders as illustrated and described on the back page of the folder are also available and are to be used in conjunction with Chart #3.

The titles of the individual sections on the charts are as follows:

Electrons are the Source of Direct Current
Current is Measured in Terms of Quantity and Time
Voltage is Measured in Terms of Electrical Pressure
Electrical Resistance is Measured in Ohms
Electrical Resistance Varies with Dimensions, Material, and Temperature of Conductor
Electrical Power is Measured in Watts
Energy Considerations and Electric Power
How an Electrical Current Produces Magnetism
How Magnetism Produces an Electric Current
How Alternating Current is Generated
Inductance
Capacitance
Reactance-Inductive and Capacitative
Circuit Impedance and Phase Relation
Resonant Circuits
Reactance Chart
Alternating Current Transformers
Radio Transformers
Emission
The Diode Tube
The Triode Tube
Reading Radio Tube Curves
The Pentode Tube
Beam Power Tube
Converters.

$1.80 for Charts 1, 2, 3 plus 5¢ a set of three lesson folders, or $3.00 a set (including Charts 1, 2, 3, and 25 sets of lessons).

The purpose of the Radio Instruction Course is to speed the instruction of students of radio and electrical subjects. It is stated by its producers that, as one of their contributions to the tremendous all-out war effort in which time is all important, they are offering this course at much less than actual production cost.

Scientific Training in Wartime

The War Policy Committee of the *American Institute of Physics* was established in the Spring of 1942. Its third report has been issued in the *Journal of Applied Physics*, Volume 14, No. 1, January, 1943, pages 1–7. The present report deals with wartime training in physics. It stresses the importance of physics in modern war, defines the field and its war uses, indicates the manpower needs in that field and mentions a present deficit in the training of skilled physicists. The parallel policy in England is described. Under the heading of "Strategic Considerations" the correlation of rate of training with probable length of the war is discussed. The importance of producing superior war weapons for the United Nations is emphasized.

The types of training are discussed in considerable detail as well as the availability of teachers and pupils.

Earlier reports of the War Policy Committee had treated the professional status of physicists, their training for war purposes, their use in the war, and the manpower requirements of the field.

Reference is also here made to another document of the *American Institute of Physics at 175 Fifth Avenue, New York, N. Y.* namely Bulletin No. 12 dated February 5, 1943. This deals with the call to active duty of Enlisted Reserve Corps students (according to a recent announcement from the War Department entitled W150-1-43, dated January 27, 1943). Procedure relative to Naval Reserve students and other related topics are discussed in this bulletin.

Certain of the information contained in the preceding publication may be of interest to radio engineers.

Signal Corps Seeks to Purchase Amateur Radio Communication Equipment

Radio amateurs have been requested to sell their short-wave communication equipment to the *Signal Corps, Army Services of Supply*. This equipment is needed both for training purposes and operational use, the *War Department* announced today.

The radio communication equipment needed consists of transmitters, ranging in power from 25 watts to 450 watts and covering various bands in the short-wave range, as well as the corresponding types of receivers and such radio components as capacitors, resistors, and installation material. Especially desired are audio-frequency and radio-frequency signal generators and oscilloscopes, precision AC and DC voltmeters, ammeters and miliammeters, and other equipment for testing.

Used equipment will be purchased if it is in perfect operating condition or if it can readily be restored to such condition. The price paid for each item will be set by a Signal Corps inspector.

Persons in possession of the desired equipment who wish to sell it for the use of the Army are invited to send a brief description, including name of manufacturer and model type, to *Captain James C. Short at the Philadelphia Signal Corps Procurement District, 5000 Wissahickon Avenue, Philadelphia, Pa.*

The complete list of the desired equipment follows:

Transmitters—Hallicrafter and Collins
Receivers—Hallicrafter, National, RME, Hammarlund, and Howard
Meters—Weston
Capacitors—Mica and Paper
Oscilloscopes, Audio Signal Generators and RF Signal Generators.

CRYSTALS

"SHORT ORDERS" IN A HURRY

If it's a "Rush" phone us, and your order for special crystals will go into work immediately under a competent crystal engineer personally charged with the responsibility for your project.

Our full facilities, including latest electrical and optical equipment, X-ray orientation, etc.—are at your service. John Meck Crystals are "Good Will Ambassadors of the Future" to acquaint you with our Family of Activities in the field of Sound and its Projection. That's why "Short Orders in a Hurry" are welcome.



Phone **CRYSTAL SERVICE DIVISION**
PLYMOUTH THREE THREE

JOHN MECK INDUSTRIES
PLYMOUTH, INDIANA

EXCELLENCE IN MUSIC AND VOICE RECREATING INSTRUMENTS

No RF Circuits and plenty of output

in this stable, accurate audio frequency oscillator

Here's an A.F. oscillator that gets down to fundamentals: sound in electrical and mechanical design—convenient to use—reliable in service. Entirely different from beat frequency oscillators, it develops output voltage directly at the desired fundamental frequency, free of any spurious signals or beats. There's no zero adjustment. Original calibration is permanently "locked."

Range: from 20 to 20,000 cycles. *Waveform:* excellent through entire frequency range, even with large changes in line voltage. *Accuracy:* within 3% or 1 cycle. *Output impedance:* five convenient values —10,250,500,5000 ohms and high (controlled by selector switch). *Output control:* continuously variable from zero to maximum. *Output power:* approximately .5 watts, ample for all ordinary purposes.

This truly fine instrument may be the answer to many of your problems in audio frequency measurements. It, and many others from the Jackson line, are *"in the service"* now. They'll again be *widely* available when victory has been won.

JACKSON

Fine Electrical Testing Instruments

JACKSON ELECTRICAL INSTRUMENT COMPANY, DAYTON, OHIO

Section Meetings

ATLANTA

"Electronic Switching," by Professor B. J. Dasher, Georgia School of Technology, November 20, 1942.

Business Meeting of the Section, January 28, 1943.

BALTIMORE

"Conserving Tin with Electronics," by C. J. Madsen, Westinghouse Electric and Manufacturing Company, March 18, 1943.

BOSTON

"Signal Corps," by Captain E. B. Baker, Army-Navy Electronics Production Agency, February 26, 1943.

Sound Movies, "Signal Corps in Action," February 26, 1943.

CHICAGO

"Application of Radio in the Handling of Emergencies on the Chicago Surface Lines System," by J. B. O'Connell, Chicago Surface Lines, February 19, 1943.

"Four-Terminal-Network Design," by Professor R. P. Siskind, Purdue University, February 19, 1943.

CINCINNATI

"Planning for Peace While Producing for Victory," by D. C. Prince, General Electric Company, February 23, 1943.

CLEVELAND

"The Cyclotron and Its Uses or Why an Atom Ought to Be Smashed," by J. A. Victoreen, The Victoreen Instrument Company, March 2, 1943.

CONNECTICUT VALLEY

"Designing a Plastic Product," by F. J. Fleming, Foxboro Company, January 21, 1943.

"Obtaining Magnesium from Dolomite," by A. F. Stockwell, New England Lime Co., February 25, 1943.

DALLAS-FORT WORTH

"Aircraft Communication Equipment," by C. H. Fox, Southwest Airmotive Company, March 10, 1943.

DETROIT

"Radio Sonde," by Glenn Stallard, U. S. Weather Bureau, February 19, 1943.

"Controlled Rectifiers," by Dr. W. H. Bixby, Wayne University, March 19, 1943.

LOS ANGELES

"Design of Direct-Current Amplifiers," by H. H. Cary, National Technical Laboratories, February 16, 1943.

"Microwave Electronics," by Dr. E. U. Condon, Westinghouse Research Laboratories, March 11, 1943.

NEW YORK

"Functions, Organizations, and Activities of the Signal Corps," by Brigadier General F. E. Stoner, Signal Corps, U. S. Army, February 10, 1943.

(Continued on page xxx)

SELECT for SERVICE

NEW HYTRON TUBES

Type	Description†	Price
836	Half-wave, high-vacuum rectifier	$11.50
837	12-watt, r.f. pentode	7.50
954	Sharp cut-off, acorn pentode	5.00
955	Acorn triode	3.00
956	Remote cut-off, acorn pentode	5.00
1616	Half-wave, high-vacuum rectifier‡	5.75
1625	25-watt, r.f. tetrode (12-v. heater)	3.50
1626	5-watt, triode oscillator	2.50
E1148	3.5-watt, u-h-f triode	2.25
VR105-30	Gaseous voltage regulator	1.25
VR150-30	Gaseous voltage regulator	1.25

OTHER POPULAR HYTRON TUBES*

Type	Description†	Price
2C25	15-watt, medium-mu triode	$3.00
2C45	7.5-watt, triode (modulator)	2.50
10Y	15-watt, general-purpose triode‡	1.50
801A/801	20-watt, general-purpose triode‡	2.50
HY61/807	25-watt, r.f. beam tetrode	3.50
841	15-watt, high-mu triode‡	2.25
864	Non-microphonic voltage-amp. triode	1.00
HY24	2-watt, power triode‡	1.50
HY31Z	30-watt, high-mu twin triode‡	3.50
HY65	15-watt, r.f. beam tetrode‡	3.00
HY69	40-watt, r.f. beam tetrode‡	3.95
HY75	15-watt, u-h-f triode‡	3.95
HY114B	(2C24) 1.8-watt, u-h-f triode‡	2.25
HY615	3.5-watt, u-h-f triode‡	2.25

*This is not a complete list.
‡Instant-heating filament.
†For complete characteristics consult Government specifications. Wattage ratings indicate maximum plate dissipation.

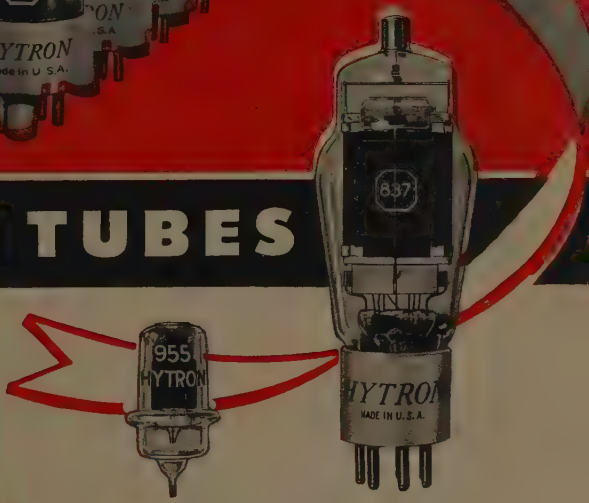

On this list of tubes which have recently joined the growing legions of Hytron types already marching on to Victory, you may find just the ones you want for your War equipments. Whether you choose the tiny "acorns" or the husky 1616 rectifier, you will discover the same high quality and design refinements which have made other Hytron tubes famous. If you place your orders well in advance, you will also be pleased by Hytron's on-schedule deliveries. Not too infrequently, deliveries are made from stock.

HYTRON CORPORATION

HYTRON RADIO TUBES

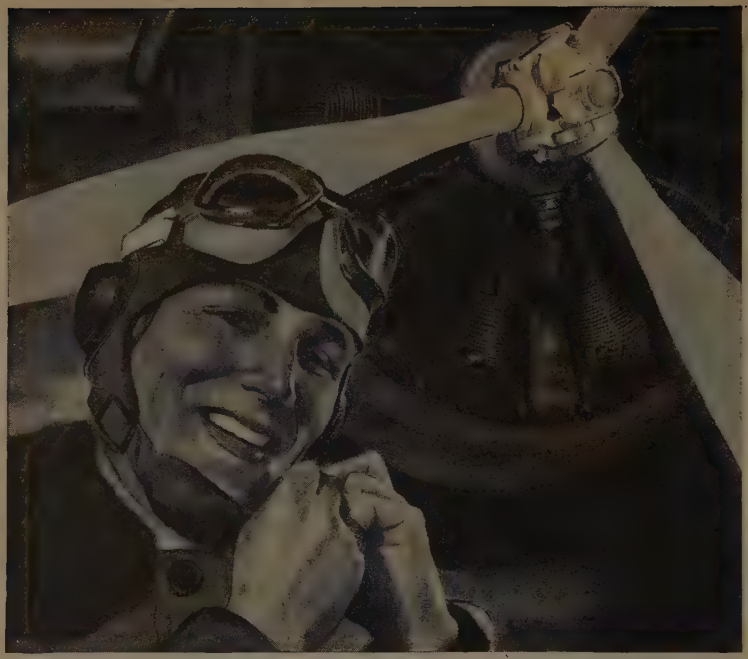

"TELL 'EM WE COULDN'T DO WITHOUT THE PARTS THEY'RE GIVING UP"

"Yeah, the folks back home are helping us plenty by giving up those radio and communication parts. See—over those hills! There's a bridge there. We just bombed hell out of it—cutting off an enemy tank column. With inadequate communications, we couldn't have done it!"

COMMUNICATIONS are vital in this war of rapid movement—where success demands "co-ordination" of widely dispersed units.

When a swift PT boat gets its radio orders to torpedo an enemy transport . . . when a bomber drops its eggs over a submarine base . . . when an allied tank column, keeping in contact by radio, speeds over Sahara's sands . . . Utah Parts are playing their role in this war of communications.

Soldiers of production build dependability into those parts at the Utah factory. Utah engineers plan it in the laboratories . . . as they pore over blueprints far into the night.

Constantly, research is going on at Utah . . . new and better methods of production are being developed . . . to help keep the ears of the armed forces open. Tomorrow—when peace comes—this research and experience will be reflected in the many civilian products being planned at the Utah Laboratories. Utah Radio Products Company, 842 Orleans Street, Chicago, Ill. Canadian Office: 560 King Street West, Toronto. In Argentine: UCOA Radio Products Co., SRL, Buenos Aires. Cable Address: UTARADIO, Chicago.

utah

PARTS FOR RADIO, ELECTRICAL AND ELECTRONIC DEVICES, INCLUDING SPEAKERS, TRANSFORMERS, VIBRATORS, UTAH-CARTER PARTS, ELECTRIC MOTORS

Section Meetings

(Continued from page xxviii)

PHILADELPHIA

"Television Video Relay System," by J. E. Keister, General Electric Company, March 4, 1943.

ROCHESTER

"Ceramic Insulators—with Special Reference to Radio Applications," by G. W. Lapp, Lapp Insulator Company, Inc., February 11, 1943.

War Production Conference, M. H. Gregg and H. P. Ingels, War Production Board, February 25, 1943.

Panel Discussion on Production Inspection, by Lt. R. G. Wyld, U.S.N.R.; C. C. Phelps, Captain H. R. Couch, Captain W. R. Scholtzhauer, all of Rochester Ordnance District; and C. G. Newton, Pratt and Whitney, February 25, 1943.

ST. LOUIS

"Graphical Analysis of Current Distribution in Vertical Radiators," by V. J. Andrew, Consulting and Manufacturing Engineer, February 15, 1943.

TORONTO

"Velocity-Modulated Tubes," by J. K. Hunton, Student, University of Toronto, January 28, 1943.

"Wide-Band Intermediate-Frequency Amplifiers," by R. W. Naylor, Student, University of Toronto, January 28, 1943.

"The Telephone in Wartime," by G. L. Long, Bell Telephone Company, February 5, 1943.

WASHINGTON

"Absolute Measurement of Aircraft Speed and Course," by Lt. Col. D. K. Lippincott, Signal Corps, U. S. Army, February 8, 1943.

"War Production and Materials Control," J. A. Krug, War Production Board, March 9, 1943.

Membership

The following indicated admissions and transfers of membership have been approved by the Admissions Committee. Objections to any of these should reach the Institute office by not later than May 31, 1943.

Transfer to Member

Bennett, R., Radio Division, Bureau of Ships, Navy Dept., Washington, D. C.

Eilenberger, S. D., 6309–13—27 Ave., Kenosha, Wis.

Jutson, R. P., Bell Telephone Laboratories, 463 West St., New York, N. Y.

Long, F. V., Box 1925, Delray Beach, Fla.

Richey, J. L., Oaklynne, Princeton Junction, N. J.

Smith, A. H. R., College of Engineering, Rutgers University, New Brunswick, N. J.

(Continued on page xxxii)

Improved in War!

. . . for Better Peace-Time Reception

The rigors of modern warfare are the world's finest proving grounds for communications equipment . . . constant usage and unusual operating conditions in every climate are a severe test of the communications receiver. Hallicrafters equipment is proving its high quality performance capabilities with our armed forces.

Hallicrafters communications receiver Model SX-28 (illustrated) 15 tubes, 6 bands, delivers outstanding reception . . . your peace-time model will be worth waiting for.

hallicrafters

CHICAGO, U. S. A.

The World's Largest Exclusive Manufacturer of Short Wave Radio Communications Equipment

"SHORTING" Switches



This is the shorting type. As the arm is rotated from one position to another the adjacent contact points are "shorted" (bridged).

or

"NON-SHORTING" Switches

This is the non-shorting type. As the arm is rotated from one position to another, the arm lifts up, and only one contact is touched at a time.



OTHER SHALLCROSS Switches are designed for use in your particular field.
Let Shallcross answer your problems.
Address: Dept. C-23

THE No. 4605 is one of many Shallcross Switches extensively used in instruments and in many other applications.

SHALLCROSS ROTARY SELECTOR SWITCHES USE SOLID SILVER CONTACTS, BECAUSE SOLID SILVER . . .

1. Has the highest conductivity of materials available.
2. Is superior to silver-plating which wears off, resulting in high resistance contacts.
3. Should it corrode the sulphide formed does not appreciably increase the contact resistance.

Creators and Makers of

Accurate Resistors—Switches—Special Equipment and Special Measuring Apparatus for Production and Routine Testing of Electrical Equipment on Military Aircraft . . . Ships . . . Vehicles . . . Armament . . . and Weapons

SAMA

SHALLCROSS MFG. CO.

COLLINGDALE, PENNA.

Membership

(Continued from page xxx)

Singelton, H. C., 2005 N.E., 28 Ave., Portland, Ore.

Admission to Member

Davis, S. L., Miller Rd. and Hoyt St., Darien, Conn.
Harvey, H. C., 406 E. Big Bend Blvd., Webster Groves, Mo.
Milne, G. O., c/o Blue Network Co., Inc., 30 Rockefeller Plaza, New York, N. Y.
Patrick, K. R., No. 1 Wireless School, Montreal, Que., Canada
Pumphrey, F. H., 4621—23 St., North Arlington, Va.
Tynan, A. G., 1525 Haynes Ave., Kokomo, Ind.

Admission to Associate

Aldridge, J. E., The Meridian Hill, Washington, D. C.
Alter, A. R., 1231 N. 13 St., Philadelphia, Pa.
Ames, I. M., 1878 Harrison Ave., Bronx, N. Y.
Anders, R. D., R. D. 2, Norristown, Pa.
Austin, B., 1406 E. Culver, Phoenix, Ariz.
Belcher, F. S., 1018 E. Whitton St., Phoenix, Ariz.
Bickel, J. J., Pan American Airways, Boeing Field, Seattle, Wash.
Bradburd, E. M., 72 W. 95 St., New York, N. Y.
Brandon, C. W., 909 E. Weldon St., Phoenix, Ariz.
Brown, W., 1155 Neilson Ave., Far Rockaway, L. I., N. Y.
Burda, A. J. Jr., Staff ComSeronSoPac, F. P. O., San Francisco, Calif.
Burnett, R. D., Signal Corps at Large, 790 Blvd., N. E., Atlanta, Ga.
Butler, W. W., RCA Service Co., Inc., Camden, N. J.
Campbell, B. K., 768 Ninth Ave., Oakland, Calif.
Casabona, A. M., 474 Third Ave., New York, N. Y.
Cassidy, R. J., 1347 Villa Rd., Birmingham, Mich.
Cassidy, S. B., R. R. 1, Fredericton, N. B., Canada
Clark, D. E., Armour Research Foundation, 35 W. 33 St., Chicago, Ill.
Cockrell, H. E., 126 Hoover St., Ann Arbor, Mich.
Collyer, D. J., 250 Binley Rd., Stoke, Coventry, England
Conrad, K., Fleet Air Wing One, c/o Fleet P. O., San Francisco, Calif.
Costelow, J. A., 5208 Chadwick Rd., Johnson County, Kansas
Cummings, E. G., 303 Central Park Ave., Wilmette, Ill.
Davis, K. E., 52 Madison Ave., Oceanside, L. I., N. Y.
DeArcangelis, F. A., 506 Holmes St., Wilkinsburg, Pa.
Dimeff, J., 3521 Nichols Ave., S. E., Washington, D. C.
Dixon, G. P., 3603 Brothers Pl., S. E., Washington, D. C.
Dorst, S. O., 82 Blackinton Crossroad, North Adams, Mass.

(Continued on page xxxiv)

RCA 849

R-F and A-F POWER AMPLIFIER, OSCILLATOR, MODULATOR

$120

LONGER LIFE

instead of increased ratings

Ordinarily, when a Transmitting Tube has been improved, its ratings are raised—*but not in these extraordinary times!*

Today, it is long life that counts—not spectacular "peak" performance.

That is why, when the RCA-849 was materially improved over a year ago by use of the famous RCA zirconium-coated anode, you heard nothing about it—even after months of actual use had shown that the improvement was such as to warrant a substantial rating increase in normal times.

Instead of reflecting such an improvement in terms of higher tube ratings we utilized it to make conservative RCA tube ratings still more conservative. This program, we felt, was far more in keeping with the war effort because it assures longer life for tubes that are difficult to replace. This has been done, not only with the RCA-849, but with other RCA tubes as well.

The war has not stopped RCA engineering progress. It has only intensified it—a fact to which the thousands of hours of additional potential life now built in to many RCA Transmitting Tubes offer the most convincing proof.

HOW TO MAKE TUBES LAST LONGER ON THE JOB . . .

RCA advertising, for months past, has been devoted to operating tips on making tubes last longer. This valuable material has now been collated into a booklet, copy of which will be sent upon request to Radio Corporation of America, Commercial Engineering Section, Harrison, N. J.



RATINGS*
FILAMENT VOLTAGE, 11 VOLTS
FILAMENT CURRENT, 5 AMPERES

PLATE VOLTAGE, 2500 VOLTS, MAX.
PLATE DISSIPATION, 400 WATTS, MAX.
*For class C telegraph service.

RCA TRANSMITTING TUBES

PROVED IN COMMUNICATION'S MOST EXACTING APPLICATIONS

RADIO CORPORATION OF AMERICA, RCA Victor Division, *Camden, N. J.*

ОНИ ХОРОШИ
ОНИ ЗАМЕЧАТЕЛЬНЫ

Don't speak Russian? Then let us translate the words of a Russian General to an American War Correspondent:

"THEY'RE GOOD . . .
THEY'RE EXCELLENT!"

You see, the Correspondent had just remarked upon the number of "Connecticut" field telephones in use by the famed Cossack Cavalry. . . . Like many an American industry, our reputation for know-how rests today on the performance of our products in the service of the United Nations, all around the world. . . . When we can again freely solicit your patronage, there will be no testimonial to which we shall point with greater pride than the commendation of the fighting Russians.

CONNECTICUT TELEPHONE & ELECTRIC DIVISION

GREAT AMERICAN INDUSTRIES INC.

MERIDEN, CONNECTICUT

ARMY E NAVY

© 1943 Great American Industries, Inc., Meriden, Conn.

Membership

(Continued from page xxxii)

Dowden, G. B., 453 Belmont Ave., Newark, N. J.
Duckwald, G. S., Jr., R. D. 5, 764 Lexington Ave., Mansfield, Ohio
Eannarino, J. M., 44 Veto St., Providence, R. I.
Edwards, R. O., 210 Angus Cres., Regina, Sask., Canada
Ehert, C. V., 200 Wagner Ave., Mamaroneck, N. Y.
Evans, N. O., R. D. 1., Box 382, Orange, Calif.
Evis, F. A., 25 Russell Hill Rd., Toronto, Ont., Canada
Faulkner, W. H., Jr., 1 West Lawn, University, Charlottesville, Va.
Finlay, E. A., 53 Burns Bay Rd., Lane Cove, N. S. W., Australia
Fitzgerald, J. A., 18A Elmbourne Rd., Tooting Bec Common, London, S. W. 17A, England
Fisk, R. H., 15420 Thomas St., Allen Park, Mich.
Fowler, R. W., 434 DeSoto St., Gainesville, Fla.
Freeman, L. S., Jr., 184 Pine Ridge Rd., Waban, Mass.
Fuchs, M., 3191 Rochambeau Ave., New York, N. Y.
Gaston, J. O., 3713 Alabama Ave., S. E., Washington, D. C.
Germany, O., 3839 Roulo St., Dearborn, Mich.
Gillespie, F. F., 941 E. 47 St., Chicago, Ill.
Graham, W. B., 601 W. 110 St., New York, N. Y.
Greenidge, G. F., Jr., 278 Macon St., Brooklyn, N. Y.
Grush, A., 881 Fox St., Bronx, N. Y.
Haddock, J. W., 1108 S. Columbus St., Arlington, Va.
Harmon, R. C., 1007 Tennessee St., Lawrence, Kan.
Hart, E. D., 18 Longlands Park Cres., Sidcup, Kent, England
Hawkins, M. F., 1107 Western Ave., Topeka, Kan.
Heikkela, R. A., 520 S. Meade St., Denver, Colo.
Hellermann, E., 5545 W. Cullon Ave., Chicago, Ill.
Hill, W. R., Jr., University of Washington, Seattle, Wash.
Holmes, E. A., III, Radiation Laboratory, M. I. T., Cambridge, Mass.
Hoffman, J. D., 723 N. 31 St., Billings, Mont.
Howard, L. R., 373 Cicotte St., Ecorse, Mich.
Hungerford, E. A., Jr., 4236 Second Road North, Arlington, Va.
Jacobi, T. E., 320 Washington, Ave., Haddonfield, N. J.
Jarema, E. D., 515 Fifth Ave., Belmar, N. J.
Jones, W. C. G., 1626 E. Turney Ave., R. 7, Box 138, Phoenix, Ariz.
Jordon, H. G., 463 West St., New York, N. Y.
Kadak, E., 5514 Selma Ave., Halethorpe, Md.
Kelton, K. O., 33 S. Fifth Ave., Tucson, Ariz.
Kimbrough, S. W., 906 E. Washington St., Charleston, W. Va.

(Continued on page xxxvi)

Serving the Electronic Industry since 1922... and now producing the following vital parts:

- CENTRALAB Steatite Insulators
- CENTRALAB Ceramic Trimmers
- CENTRALAB High Frequency Circuit Switches
- CENTRALAB Volume Controls
- CENTRALAB Ceramic Capacitors
- CENTRALAB Wire Wound Controls
- CENTRALAB Sound Projection Controls

Centralab

Division of GLOBE-UNION INC., Milwaukee

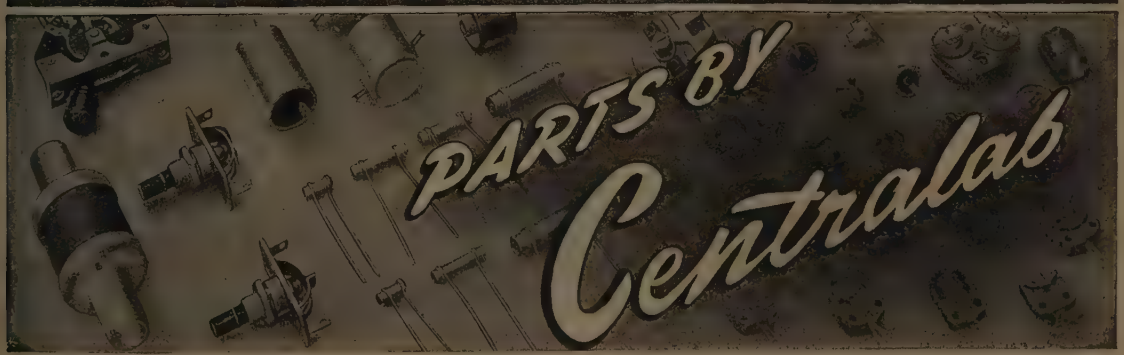

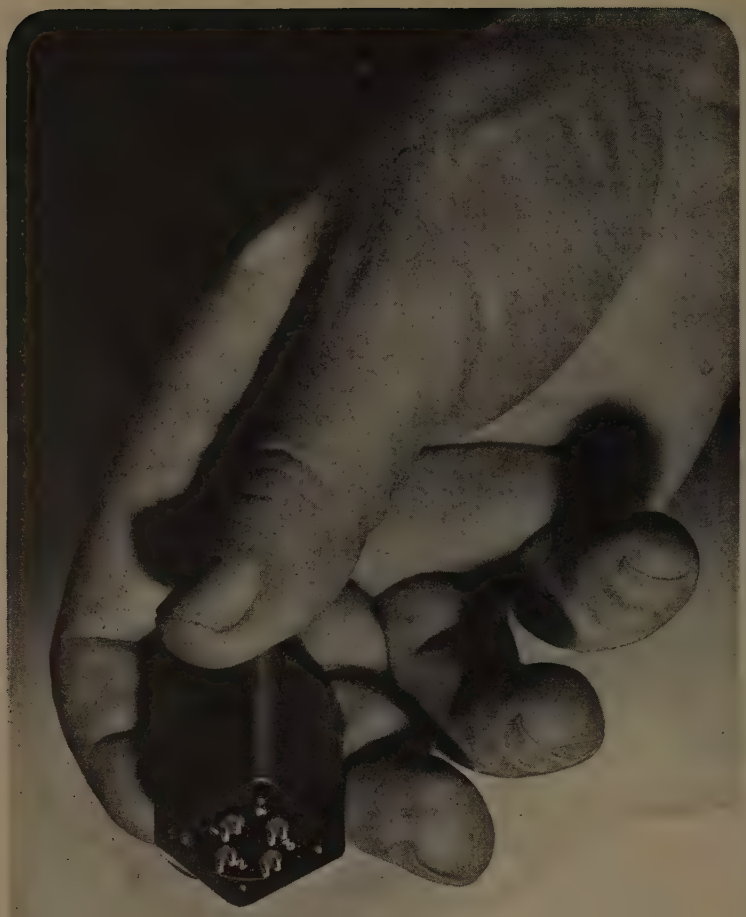

LITTLE BUT SO IMPORTANT

to New War Developments

Ships, planes, tanks and the forces in the field depend on the constant performance of Electronic Instruments for coordination by communication, detection, controls and other war winning developments.

Transformers that are little and tough—designed and constructed to meet the most unusual requirements and conditions—are a vital part of these devices.

There is never an hour, day or night, around this war-torn world that Transformers are not helping to win this war by being an important part of the Electronic Units that are doing so much to aid the Armed Forces.

CHICAGO TRANSFORMER

CHICAGO TRANSFORMER CORPORATION

3501 WEST ADDISON STREET • CHICAGO

Membership

(Continued from page xxxiv)

King, J., 535 S. St. Marys St., San Antonio, Texas
Klopke, E. A., 3618 S. Seeley Ave., Chicago, Ill.
Kuehl, W. J., 229 Third St., Neenah, Wis.
Lamplugh, E. L., W.O.R.E.S. 16, Naval Research Laboratory, Anacostia Station, D. C.
Landry, A. W., 12 Greenwood Rd., Yonkers, N. Y.
Larson, R. E., 2222 Eye St., N. W., Washington, D. C.
Lee, M. H., 4408—16 St., N. W., Washington, D. C.
Levinson, S., 907 Argyle St., Chicago, Ill.
Lewis, G., 4165 Georgia St., San Diego, Calif.
Lockhart, R. W., 4010 N. Kenmore Ave., Chicago, Ill.
Long, M. L., Jr., 46 Washington Elms, Apt. 463, Cambridge, Mass.
Loranz, A. F., 30 Bay State Rd., Boston, Mass.
Lorentz, G. B., 453 N. Third St., San Jose, Calif.
Lund, J. E., 7604 Zimple St., New Orleans, La.
Masters, V. V., 1506 W. Lynwood, Phoenix, Ariz.
McKenna, W. E., 435 Walnut St., Lexington, Ky.
McKenzie, D. S., 1244 S. Lake St., Los Angeles, Calif.
Meisinger, H. P., 3005 Nelson Pl., S. E., Washington, D. C.
Melman, I. J., 907 Argyle St., Chicago, Ill.,
Merill, J., CRM—U. S. Coast Guard, Ketchikan, Alaska
Miller, J. E., 818 Tonawanda St., Buffalo, N. Y.
Moore, E. K., 401 W. Jackson St., Phoenix, Ariz.
Morgan, E., 20 Ghyllwood Dr., Bingley, Yorks, England
Mosher, H. C., 3009 N. Second St., Phoenix, Ariz.
Mueller, F. W., 1903 La Paloma, Alhambra, Calif.
Nagy, J. J., 4203 N. Pershing Dr., Arlington, Va.
Nelson, C. W., 100 Rugby Rd., Syracuse, N. Y.
Newell, A. J., Shirley Court Apts., 105F Long La., and Bradford Rd., Upper Darby, Pa.
Norris, R. O., 5407 Hudson St., Dallas, Texas
Oswald, S., 66 Preston St., Belleville, N. J.
Panter, F., 4845 Hutchinson St., Apt. 5, Montreal, Que., Canada
Peterson, D. W., R. D. 2, Princeton, N. J.
Phillips, N. A., 4923 Ferdinand St., Chicago, Ill.
Pool, W. B., KOY, 838 N. Central Ave., Phoenix, Ariz.
Price, D. B., 7901 Provident Rd., Philadelphia, Pa.
Price, O. I., Frederick, Md.
Randolph, L. W., 54 Pine St., Orono, Maine
Rattner, S., 1140 College Ave., New York, N. Y.
Rauh, M. A., 3130 Wisconsin Ave., N. W., Washington, D. C.
Raymond, G. H., 407 Westview Ave., Mt. Airy, Philadelphia, Pa.

(Continued on page xxxviii)

The Acid Test...

WILL IT HELP THE WAR EFFORT ...WILL IT SPEED VICTORY?

The application of this inflexible test to every management or production action and problem is bearing us fruit in the form of an unprecedented output of special alloys used in their entirety for vital war applications . . . special alloys that are helping the war effort and speeding VICTORY!

• RIBBON • STRIP •
ROD
SPECIAL ALLOYS
WIRE

WILBUR B. DRIVER CO.
NEWARK • NEW JERSEY

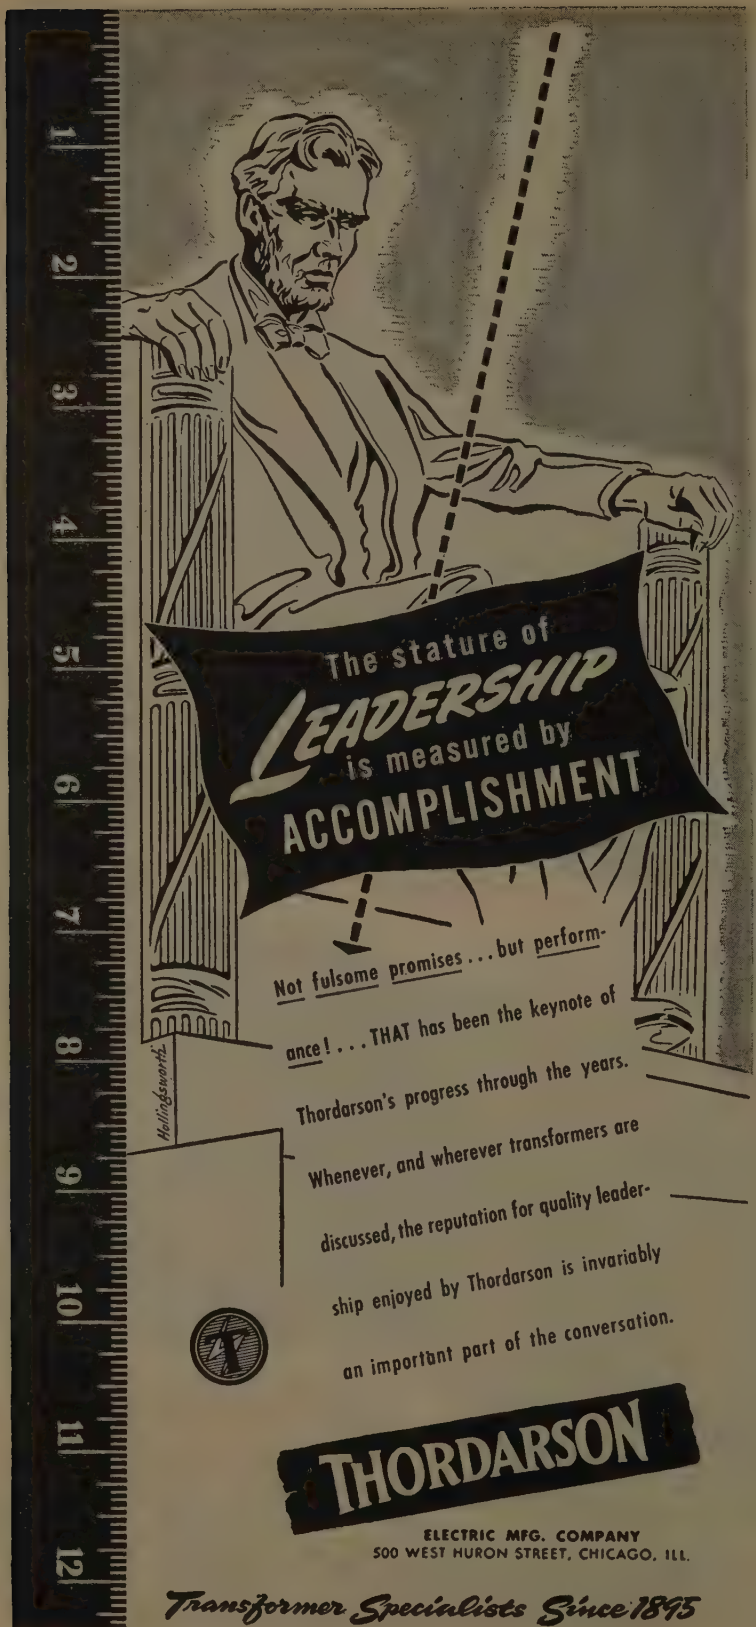
The stature of
LEADERSHIP
is measured by
ACCOMPLISHMENT
Not fulsome promises . . . but performance! . . . THAT has been the keynote of Thordarson's progress through the years. Whenever, and wherever transformers are discussed, the reputation for quality leadership enjoyed by Thordarson is invariably an important part of the conversation.
Hollingsworth
THORDARSON
ELECTRIC MFG. COMPANY
500 WEST HURON STREET, CHICAGO, ILL.
Transformer Specialists Since 1895

Membership

(Continued from page xxxvi)

Read, C. T., 507 W. 62 St., Chicago, Ill.
Reedy, C. W., 2215 Minnesota Ave., S. E., Washington, D. C.
Remick, J. E., Chelten Apts., 17 and Chelten, Philadelphia, Pa.
Restemeyer, W. E., College of Engineering, University of Cincinnati, Cincinnati, Ohio
Richards, C. A., 4613 Harvard Rd., College Park, Md.
Riggs, L. G., 158 Laurel Ct., Elgin, Ill.
Rosenberg, W., 46 Albert Rd., Manchester 16, England
Rothe, F. S., 310 Huston St., Scotia, N. Y.
Ruppel, A. E., 221–15 Hanlon Ave., Queens Village, L. I., N. Y.
Saffitz, I. M., Bliley Electric Co., Erie, Pa.
Schachte, W. L., Radio Material Section, U. S. Navy Yard, Charleston, S. C.
Schenck, J., 120 Prospect St., Princeton, N. J.
Sheftelman, E. H., 311 Ninth Ave., Belmar, N. J.
Shurkus, A. A., Bausch and Lomb Optical Co., 635 St. Paul, Rochester, N. Y.
Sievert, A. H., Canadian Westinghouse Co., Ltd., Aberdeen Ave., Hamilton, Ont.
lzer, V., 1125 Bryant Ave., Bronx, N. Y.
Simms, R., Melville Aero. Radio School, 45 W. 45 St., New York, N. Y.
Sleight, J. W., 1155 Greenwich, San Francisco, Calif.
Smalley, T., R.C.A.F., No. 1 Wireless School, Montreal, Que., Canada
Smith, R., 232 E. Eliott Ave., Plymouth, Ind.
Smith, V. M., 82 Webster St., N. E., Washington, D. C.
Speed, D. K., 439 Marlborough St., Boston, Mass.
Spinner, L. N., Race Rd. R. R. 14, Cheviot, Ohio
Stenersen, H. P., 41 E. Riverview, Apt. 19, Dayton, Ohio
Stevens, J. S., 434—60 St., Oakland, Calif.
Taylor, J. C., 6660 Cornelius St., Philadelphia, Pa.
Thornton, J. T., 429 S. Muskogee Ave., Tahlequah, Okla.
Tiley, J. W., 4226 Comly St., Philadelphia, Pa.
Trippe, D. F., 1604 Angier Ave., Durham, N. C.
Udell, C. D., 1128 N. Lockwood Ave., Chicago, Ill.
Updike, W. E., 1043 Cook Ave., Laurence Harbor, N. J.
Valdetarro, A., RCA-Victor Division, Bloomington, Ind.
Walker, C. A., Daniels Apts., Lee St., Starkville, Miss.
Walton, H. T., Box 1, Marion, Ind.
Wappler, A. C., 23–20—121 St., College Point, L. I., N. Y.
Wei, C. C., Rm. 1335, 40 Wall St., New York, N. Y.
Wellons, R. S., 247 Washington St., Winchester, Mass.
Wernicke, W. L., 135–34—78th Ave., Kew Gardens Hills, L. I., N. Y.
Wesley, C. A., 432 W. 45 St., New York, N. Y.

(Continued on page xl)

Shadow and Substance

In the highly specialized field of electronics, the question "Who made the tubes?" will always be a matter of vital importance. Power tubes bearing the name "United" are products of original pioneers in the miracle known today as electronics. Step by step these seasoned engineers helped evolve the principles and advance the science of fabricating transmitting tubes which hold a superb record of performance. The early pioneers at United are *still actively pioneering!* The wealth of experience which they have been privileged to accumulate under the demands of war will be available to you when "United" electronic tubes are available again on a peace-time scale for radio and industrial applications.

UNITED

ELECTRONICS COMPANY

NEWARK NEW JERSEY

INCCO
INCCO
CONDENSER
Industrial's high standard of quality parallels that of the famous Hallicrafters HT-4B transmitter in the field of communications.
INDUSTRIAL CONDENSERS ARE ON EVERY BATTLEFRONT WITH THE WORLD-FAMOUS
hallicrafters
COMMUNICATIONS EQUIPMENT
PAPER, OIL AND ELECTROLYTIC CAPACITORS
INDUSTRIAL CONDENSER CORPORATION
1725 W. NORTH AVE., CHICAGO, U. S. A.
DISTRICT OFFICES IN PRINCIPAL CITIES
QUICK DELIVERY FROM DISTRIBUTOR'S STOCKS

Membership

(Continued from page xxxviii)

Westphal, W. B., 290 Massachusetts Ave., Cambridge, Mass.
Wirth, M. H., WJIM, Lansing, Mich.
Wright, O. L., 523 N. Jackson St., Belleville, Ill.
Wroblewski, T., The Lumens, Labor-In-Vain Rd., Ipswich, Mass.
Wyland, G. P., 1728 N. Mariposa Ave., Hollywood, Calif.
Zimmerman, S. W., 239 Main St., Dalton, Mass.

New Equipment Notes

Allied Control Company Introduces New Small Power Relays

The Allied Control Company announces that their Models BO and BJ Power Relays for flight, firing and communication control have been redesigned to require minimum mounting space and to permit variations in their mounting bases to make them widely interchangeable.

BO and BJ Relays have been available for two years and with their present variety of mounting bases meet the individual requirements for tanks, planes, and ships. The design and construction of Allied Models BO and BJ power relays include easily accessible terminal connections and a semi-balanced armature to withstand vibratory motion with minimum coil power.

The specifications of BO are: contact ratings, non-inductive, 15 amperes for 12

and 24 volts DC and 110 volts AC; single or double pole, double throw; weights, 4 ounces with screw or shake-proof nut mounting or 7 ounces with Bakelite mounting (model #BOB in Bakelite); withstands vibratory motion to 12G with 2½ watt operating power; operates at temperatures of +70° C. or −50° C.; resists corrosion beyond any present specifications; dimensions, (screw or shake-proof nut) $1\frac{5}{8}\times1\frac{11}{32}\times1\frac{7}{8}$ inches—(Bakelite mounting, model BOB) $2\frac{5}{8}\times1\frac{5}{8}\times2\frac{5}{16}$ inches.

The specifications for BJ are: contact ratings, non-inductive, 5 amperes for 12 and 24 volts DC and 110 volts AC; single or double pole, double throw; weights, 2½ ounces with screw stud mounting or 5½ ounces with Bakelite mounting (model #BJB in Bakelite); withstands vibratory motion to 12G with 2 watts operating power; operates at temperatures of +70° C. or −50° C. and resists corrosion beyond any present specifications; dimensions, (screw stud mounting) $2\frac{5}{16}\times\frac{11}{16}\times1\frac{5}{16}$ inches (Bakelite mounting, model BJB) $\frac{7}{16}2\times1\frac{11}{16}\times1\frac{5}{16}$.

(Continued on page xlii)

Physicals FOR CAPACITORS!

ay Photo of
ar Molded
nino Capacitor

There's an inside story of capacitors, too.

The genius of Roentgen is helping select the A-1's, not only in the field of medicine but also for quality inspection of molded capacitors.

Today, fluoroscopic inspection is an established procedure at Solar, assuring accurate centering of windings in Domino Molded Paper Capacitors. This "ounce of prevention" guarantees capacitors which truly reflect "Quality Above All"!

Solar Manufacturing Corporation, Bayonne, New Jersey.

Solar SOLAR —II— CAPACITORS —II— ARMY E NAVY

CAPACITORS: ELECTROLYTIC • MICA • PAPER • TRIMMER • TRANSMITTING

PREMAX

TUBULAR METAL ANTENNAS

Premax Metal Antennas are meeting the rigid requirements of the fighting forces of the Allied Nations. Send for Bulletin of Standard designs, or submit your specifications for special type of Antennas and Mountings.

Premax Products

DIVISION OF

CHISHOLM-RYDER CO., INC.

4301 Highland Ave. Niagara Falls, N.Y.



New Equipment Notes

(Continued from page xl)

New Littelfuse Indicator Operates by Reflected Light

A new signal indicator for use in aircraft wherever a signal light is used promises improved indicating service in other fields as well, is announced by *Littelfuse Incorporated, 4757 Ravenswood Avenue, Chicago, Illinois,* and *El Monte, California.* It is the Littelfuse No. 1534 Signalette.

Indication by this unit is entirely by reflected light and radio activity. The Signalette operates by fluorescence under "black light" from the usual sources within aircraft. A radium-active fluorescent paint used on the indicator shows signals in total darkness. A saving in current is effected as it uses only 1.5 watts as against the approximate 4½ watts used by present lamps.

It does away with the blur occasioned by transmitted light, as from lamps in present use. Clear visibility of signals is dependably effected. The pilot's eyes do not have to adjust to the reflected light, which makes for better vision in night flying. Indication is free from glare in daylight as well as night-time use. One of the principal objections to light-transmitted indicators is that they dim out in bright sunlight. The Signalette makes the signals correspondingly brighter in the strongest light.

Another important improvement over glass signal lamps in use, is the Signalette's non-shatterable protection. Signalette carries a transparent plastic cap, which withstands the most severe tests of shock or explosion; and permits free penetration by ultra-violet rays.

The body of the Signalette indicator houses a solenoid, the armature of which is connected with the "butterfly" indication vanes by a simple lever hookup. The fluorescent "butterfly" opens instantly to show signals, reflecting the proper indicating light. "Butterflies" are furnished in red, amber and green. When not indicating Signalette is black. Original clarity and dependability were shown by Signalette after life-test operation in excess of 450,000.

Scrap Salvage Manual

The proper handling of obsolete machinery or other factory material, as well as useful machinery which is not currently active can be learned from the 'Scrap Manual' which will be sent to those desiring to tackle salvage questions by the *Business Press Industrial Scrap Committee, Room 3303, Empire State Building, New York, N. Y.*

"The Committee suggests the following rule relative to equipment:

> 'If it has not been used in three months, and if someone cannot prove that it is going to be used in the next three—sell it—or scrap it!'

"It is pointed out that scrap and used equipment dealers pay well for usable machinery and materials. It is suggested further that attention should be directed to

> 'Obsolete machinery, tools, equipment, dies, jigs, fixtures, etc., which are incapable of current or immediate

(Continued on page xlviii)

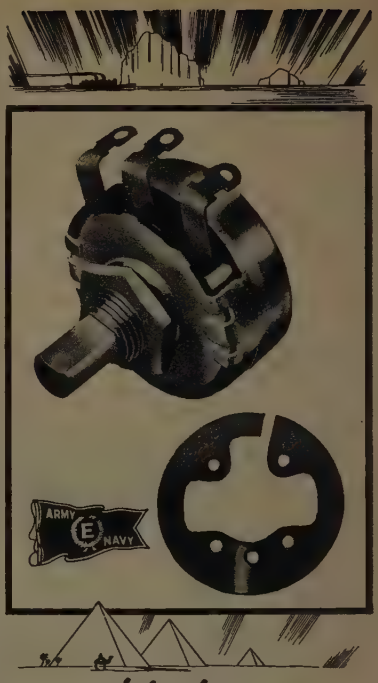

with the new

STABILIZED *Element*

★ Quietly, modestly, quite unannounced Clarostat Series 37 controls have for many months past been coming through with the *new Stabilized Element.* We wanted this outstanding development to prove its worth out in the field, by users, in corroboration of our own critical tests.

Results have spoken for themselves. Users have promptly spotted something *radically better* in non-wire potentiometers and rheostats. Remarkably accurate resistance values first and last; extreme immunity to humidity; temperature and other climatic conditions; minimized wear and noise; smoother rotation—these features have been widely noticed in connection with the new Clarostat *Stabilized Element—stabilized* by heat-treatment, chemical-treatment, lubrication-treatment, for truly outstanding performance.

Consult us . . .

CLAROSTAT *Controls and Resistors*

CLAROSTAT MFG. CO., Inc. · 285-7 N. 6th St., Brooklyn, N.Y.

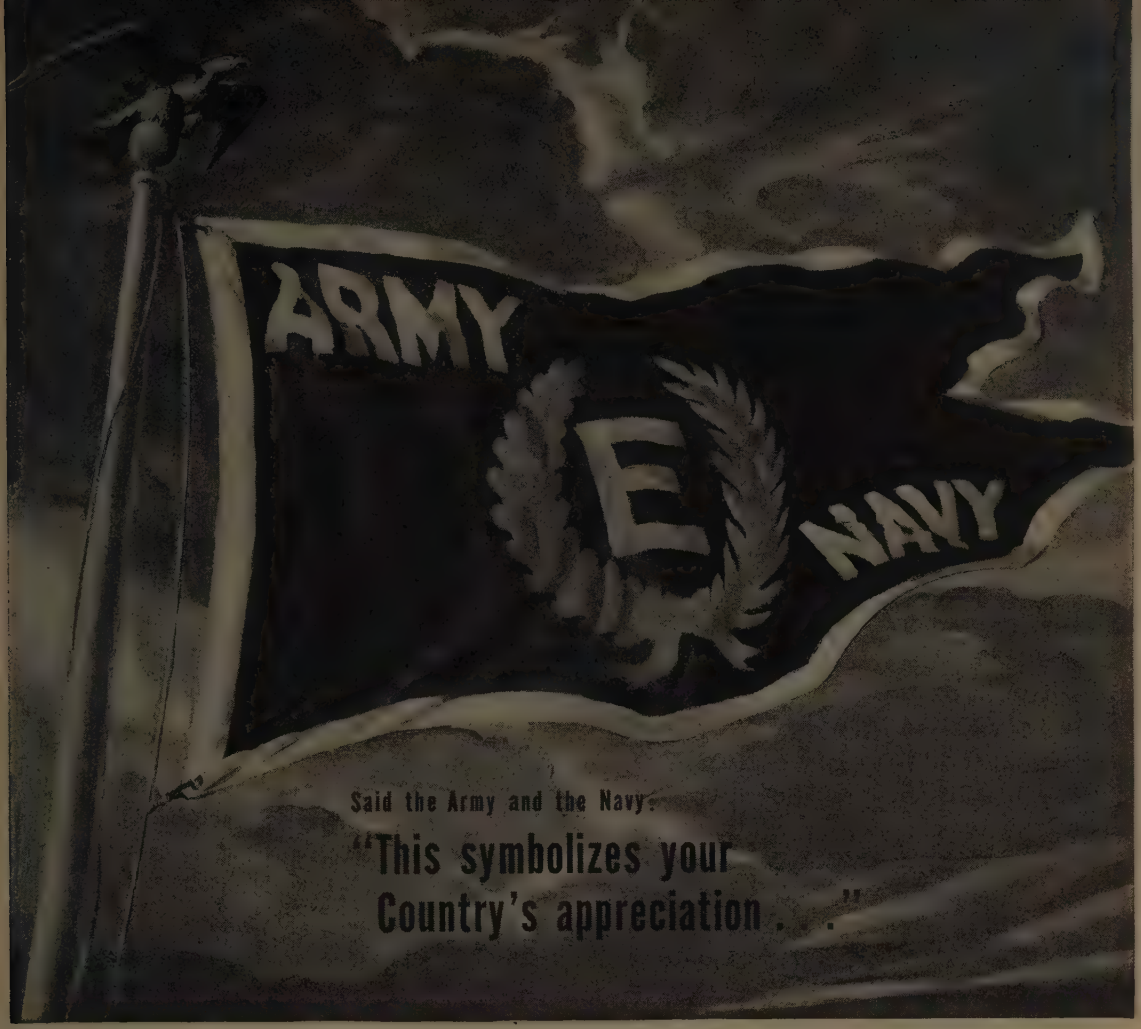

There it flies
The coveted
Army-Navy "E" . . .

We can't tell you
Very much about
The electronics research
That won it . . .

Such matters are
Wartime secrets . . .

But this we *can* say . . .
In the words of
The Army and Navy
This pennant
Represents
"Great accomplishment
In the production
Of war equipment."

Today
Modern radio equipment
Designed and developed
By the Laboratories Division of
Federal Telephone and Radio Corporation
An I.T.&T. Associate
Is helping Uncle Sam's fighting forces
Work together
On land, sea and in the air . . .

Tomorrow
It will help build
A better world
For every man.

THE LABORATORIES DIVISION OF
Federal Telephone and Radio Corporation
67 Broad Street, New York, N. Y.

AN I T&T ASSOCIATE

Lafayette is doing its part to win the war...*and* the peace that must surely follow. We play the important part of speeding the war effort by supplying emergency requirements of radio, sound and electronic parts to all branches of the armed forces as well as to manufacturers and sub-contractors. Lafayette is in there fighting to save you time by supplying all of your needs in one order—*quickly!*

Now it is no longer necessary to comb the field to find the various parts you need. Due to Lafayette's extensive buying facilities and large, diversified stocks, one order (no matter how large or how small) will bring quick deliveries on *all* of your requirements.

Free catalog—Radio, Sound and Electronic Parts—Dept. 5H3

LAFAYETTE RADIO CORP.
901 W. JACKSON BLVD., CHICAGO, ILL.
265 PEACHTREE ST., ATLANTA, GEORGIA

"Quick Deliveries on Radio, Sound and Electronic Parts"

2 BOOKS EVERY "WAR-TORN" ENGINEER NEEDS!

A-C CALCULATION CHARTS

By R. LORENZEN

This new Rider Book greatly reduces the time required for alternating current engineering calculations—speeds up the design of apparatus and the progress of engineering students. Two to five times as fast as using a slide rule! Thousands of enthusiastic users.

A-C CALCULATION CHARTS are designed for use by civilian engineers and engineers of the armed forces who operate in the electrical—communication—power—radio—vacuum tube—telephone—and in general, the electronic field. Invaluable for instructors as well as students, and also administrative officers who check engineering calculations.

$7.50
160 pgs.
(9½ x 12 in.)



CATHODE RAY TUBE AT WORK

The Cathode Ray Tube at Work is the accepted authority on the subject. The cathode ray tube in the Oscillograph and its application to electronic and industrial work is fully discussed. Profusely illustrated. 338 pages $3.00

JOHN F. RIDER PUBLISHER, Inc.
404 FOURTH AVENUE, NEW YORK CITY
Export Division: Rocke-International Elec. Corp., 100 Varick St., N. Y. C. • Cable: ARLAB

New Equipment Notes

(Continued from page xlii)

future use in the war production effort because they are broken, worn out, irreparable, dismantled or in need of unavailable parts necessary to re-employment'.

Armored Insulation Plate Supply Transformer

To overcome the effects of high voltage aging, the engineering laboratories of *The Acme Electric & Manufacturing Company of Cuba, New York*, have developed an armored-insulation High Voltage Plate Supply Transformer. Rated at 3300 volts, 1.8 amperes secondary, it is intended for transmitter service for DC rectifier systems. Sturdily constructed throughout, but with special emphasis being placed on the adaptation of its insulation, it is especially suitable for continuous service of radio transmission. Special engineering bulletin available by writing the manufacturer.

Improved "Plug-in" Type Dry Electrolytic Condensers

The Sprague "Plug-In" type of Dry Electrolytic Condenser which is pictured here is recommended for the elimination of low frequency ripple (2–100 cycles). This modern type of electric condenser can be sealed as well as any condenser. It can be easily mounted or removed. It is regarded as so reliable able to take abuse and deliver long life, that the manufacturer, *Sprague Specialties Company of North Adams, Mass.*, considers it entirely practical to solder or weld it into units.

Its basic qualities of small size and light weight are further enhanced by the fact that they perform uniformly up to the very last volt on the rating, and will take repeated surges even higher. Underloads likewise are no problem.

Special emphasis is placed on the ability of these "Plug-In" type dry electrolytic condensers to operate efficiently under adverse temperature and climatic conditions, whether at extremely high or at normal levels. The use of dry electrolytics is increasingly widespread.

Clarostat Opens Second Plant

As a further contribution to the war production effort and especially with an eye to that six-months' star for its Army-Navy "E," Clarostat Mfg. Co., Inc., Brooklyn, N. Y., announces the opening of its second plant in the same city. The new plant started production operations on March 15th, and is entirely financed by Clarostat.

Clarostat Plant 2 provides greater production floor space than that of the original plant, even though the latter occupies the five-story company-owned building which has been added to by an annex on the adjoining parcel of land. The new plant will be devoted exclusively to assemblies, while the original plant will be devoted to fabrication of parts, windings, engineering and general offices.

More than ever

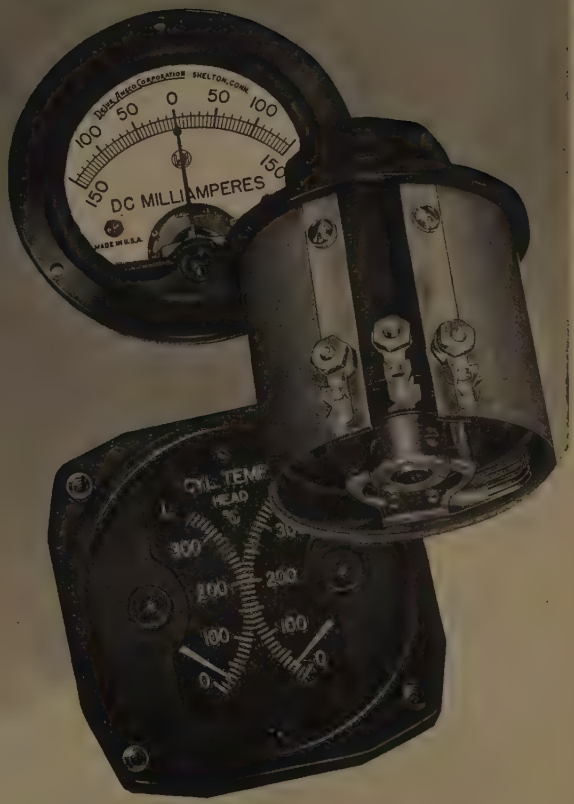

With the struggle becoming increasingly fierce . . . now, more than ever . . . the quality of American men and equipment stand out in bold relief. We cannot tell you where . . . but we do know that somewhere on all the fronts . . . the quality of DeJur Aircraft and Electrical Instruments, Potentiometers and Rheostats is being subjected to the severest of tests. Thanks to 25 years of experience and research, our products will not be found wanting.

Awarded for Excellence in Production and Quality of Materiel

DeJur-Amsco Corporation

SHELTON, CONNECTICUT

NEW YORK PLANT:
99 Hudson Street, New York City

CANADIAN SALES OFFICE:
560 King Street West, Toronto

MORE THAN EVER . . . it's important to keep buying War Bonds and Stamps

"The listening is often as important in this man's war as the doing or the talking—so when I throw it over to a reconnaissance plane, an observation post or general headquarters—this headset better work and work right."

ROGER—soldier, it *will* work okay! It will work as right as precision manufacturing, careful inspection and the determination of Utah workmen can make it.

Headphones are only one of the many products now being manufactured by Utah for the armed forces. A wide range of electrical and electronic devices is now being built in the Utah factories—important parts that must be made with split-hair precision in order to take their vital places on the fighting or war production fronts.

It may be that you have a wartime problem that can be solved with Utah parts. Utah engineers are experienced in electrical and electronic problems. Utah production men are familiar with all the angles of producing precision work in quantity and on time. Write today for full information.

UTAH RADIO PRODUCTS COMPANY

842 Orleans Street • Chicago, Illinois

Canadian Office: 838 King St., W., Toronto • *In Argentine:* UCOA Radio Products Co., SRL, Buenos Aires • *Cable Address:* UTARADIO, Chicago

Utah

UTAH WIRE-WOUND CONTROLS, RELAYS, JACKS, RESISTORS, PLUGS, SWITCHES, MOTORS

Section Meetings

BOSTON

"Electronics of the Atmosphere," by Dr. H. T. Stetson, Massachusetts Institute of Technology; March 26, 1943.

BUFFALO-NIAGARA

"New Method of Broadcasting Television and Audio on One Carrier," by J. H. Robinson Sterling Engine Company; March 31, 1943.

"Electron Microscopy," by C. H. Bachman, General Electric Company; April 21, 1943.

CHICAGO

"Electronic Musical Instruments," by Lloyd Loar, Northwestern University; March 19, 1943.

"Panoramic Radio Spectroscopes and Their Application," by Dr. Marcel Wallace, Panoramic Radio Corporation; March 19, 1943.

"Television Today," by A. H. Brolly, Balaban and Katz, Television Station W9XBK; April 16, 1943.

"Frequency and Time Standards," by R. J. Donaldson, Commonwealth Edison Company; April 16, 1943.

CINCINNATI

"The Engineer in Business," by A. J. Allen, Cincinnati and Suburban Bell Telephone Company; April 1, 1943.

CLEVELAND

"Electronics in a Tube Mill," by Cecil Farrow, Republic Steel Corporation; April 22, 1943.

DALLAS-FORT WORTH

"Frequency-Modulated Equipment" by J. K. Chatfield, Porter Burgess Company; April 10, 1943.

DETROIT

"The Use of Radio and Electronics by the Detroit Edison Company," by A. B. Buchanan, F. L. Taylor, H. A. Boltz, H. G. Hammond, A. R. Hellwarth, W. A. Hirt, and H. A. Wallhausen, Detroit Edison Company, April 16, 1943.

MONTREAL

"The Technician at War," by Dr. H. G. Littler, Canadian Industries, Ltd.; March 11, 1943.

"Impedance Matching," by E. Legris, McGill University; March 31, 1943.

"Frequency Conversion in Superheterodyne Receivers," by G. B. MacKimmie, McGill University; March 31, 1943.

NEW YORK

"Tubes for High-Power Short-Wave Broadcasting Stations," by Georges Chevigny, Federal Telephone and Radio Laboratories; March 3, 1943.

"Acoustics for Broadcasting Studios for Speech versus Music," by E. J. Content, Station WOR; April 7, 1943.

"Material and Construction of Speech Broadcasting Studios," by Lonsdale Green, Jr., Acoustical Construction Corporation; April 7, 1943.

PHILADELPHIA

"Bombs for Berlin—Terror for Tokyo—

(Continued on page xxii)

NEW WORLDS TO CONQUER!

FOR ELECTRONICS ENGINEERS!

PRECISION

Under the guidance of highly skilled operators, the finest precision machines are employed to insure uniform high quality in all National Union tubes. In this photograph a bending machine in the Stem Department is shown doing its war job of helping to provide this year the largest number of the finest electronic tubes National Union has ever built.

Sure, winning the War is our big job right now. To that end we here at National Union are exerting our every thought and energy—both on our production lines and in our research laboratories. But after the war—what then? It is certain that for men trained in electronics there'll be new worlds to conquer. For from today's new applications of electronic tubes specifically developed to help win the war—will emerge countless new peacetime applications. It is here that American business will find invaluable assistance in designing, producing and packaging the better products its post war customers will want and demand. With the designers and producers of these new products National Union will welcome the opportunity to share its up-to-the-minute knowledge and research experience.

Transmitting Tubes • Cathode Ray Tubes • Receiving Tubes • Special Purpose Tubes • Condensers • Volume Controls • Photo Electric Cells • Exciter Lamps • Panel Lamps • Flashlight Bulbs

NATIONAL UNION RADIO CORPORATION

NEWARK, NEW JERSEY LANSDALE, PENNSYLVANIA

NATIONAL UNION ELECTRONIC TUBES

Do You--

- ☐ Handle your mike with respect?
- ☐ Fasten it securely to the stand?
- ☐ Put cable where it won't be tripped?
- ☐ Clip cable to bottom of floor stands?
- ☐ Remember a cable's weight can pull a hand mike off a slick table?
- ☐ Send your microphone to the factory or its dealer if it gives trouble?
- ☐ Pack it carefully when traveling rough roads, or when subjecting it to vibrations in any way?
- ☐ Read the instructions very carefully?
- ☐ Make sure the circuit is correct for the type of mike you are using?
- ☐ Keep your crystal microphone away from radiators, sunny windows and closed cars sitting in the sun?
- ☐ Protect your microphone cable from contact with heat, light and oil, and keep it in a cool, dark place?
- ☐ Avoid pinching, twisting, pulling and kinking the cable?

IF YOU CAN ANSWER YES

to all the above questions. you can logically expect long, useful service from your microphone. Remember, always, that microphones are sensitive instruments and will give you better service under all conditions when they are treated with respect. If your unit does not operate at peak performance, send it to the factory or to its dealer — don't try home repair jobs!

THIS FREE BOOK TELLS YOU HOW TO CARE FOR YOUR MIKE



Send NOW for your Free Copy of Turner's new 8-page, fully illustrated, colorful Microphone Catalog. Each unit is engineered for specific jobs and trouble-free performance. Select the one best suited to your needs at the price you want to pay.

The Turner Company

Cedar Rapids, Iowa

Free

THIS NEW TURNER MICROPHONE CATALOG

Section Meetings

(Continued from page xx)

Tires for You," by H. C. Roemer, Standard Oil Company of Pennsylvania; April 5, 1943.

SAN FRANCISCO

"Microwave Electronics," by Dr. E. U. Condon, Westinghouse Electric and Manufacturing Company; March 3, 1943.

"Science and War," by Dr. J. H. Hildebrand, University of California; March 19, 1943.

ST. LOUIS

"Electronics on Seagoing Units," by Lieutenant Commander R. T. Alexander, U. S. Coast Guard; March 29, 1943.

TWIN CITIES

"Some Notes on Applications and Designs of Audio Transformers," by W. E. Lehnert, Audio Development Company; March 25, 1943.

WASHINGTON

"Impedance and Phase-Angle Characteristics of Two-Terminal Networks," by V. L. Edutis, U. S. Naval Research Laboratory; April 12, 1943.

Membership

The following indicated admission and transfers of membership have been approved by the Admissions Committee. Objections to any of these should reach the Institute office by not later than June 30, 1943.

Transfer to Member

Ebel, A. J., 1113 W. Washington St., Champaign, Ill.

Clark, R. G., 9 Christchurch Pl., Epsom, Surrey, England

Dingley, E. N., Jr., Bureau of Ships, Navy Dept., Washington, D. C.

Admission to Member

Purgett, L. J., 463 West St., New York, N. Y.

The following admissions and transfers of membership were approved by the Board of Directors on May 5, 1943.

Transfer to Member

Howes, F. S., Engineering Bldg., McGill University, Montreal, Que., Canada

Koehler, G., Electrical Lab., University of Wisconsin, Madison, Wis.

Kraus, J. D., Naval Ordinance Lab., Navy Yard, Washington, D. C.

McConnel, W. G., Bendix Radio Corp., Baltimore, Md.

Admission to Member

Schairer, O. S., Radio Corporation of America, 30 Rockfeller Pl., New York, N. Y.

(Continued on page xxiv)

with but a Single thought

Gertrude Fontaine, mount operator at Hytron's Salem plant, and soldier in the Army of Production.

ss Fontaine concentrates her nimble fingers and
en young eyes (assisted by a microscope) upon
ot-welding and assembling minute parts of a 954.

another floor, a Hytron engineer is giving lavishly, night and day, of his long training and perience as he designs and develops a new War tube in record time. The driving force urging em — and all of us at Hytron — on to superhuman effort, stems from a single thought, a single rpose: to supply our courageous fighting men with tools to win. Hytron employees have but e goal — a mounting flood of top-quality tubes to serve as the "hearts" of electronic and dio equipment helping our boys to blast the way to speedy and permanent Victory.

Oldest Exclusive Manufacturer of Radio Receiving Tubes

Hytron ELECTRONIC AND RADIO TUBES HYTRON RADIO TUBES Corporation

"SHORTING" Switches



This is the shorting type. As the arm is rotated from one position to another the adjacent contact points are "shorted" (bridged).

or

"NON-SHORTING" Switches

This is the non-shorting type. As the arm is rotated from one position to another, the arm lifts up, and only one contact is touched at a time.



OTHER SHALLCROSS Switches are designed for use in your particular field.
Let Shallcross answer your problems.
Address Dept. C. 23

THE No. 4605 is one of many Shallcross Switches extensively used in instruments and in many other applications.

SHALLCROSS ROTARY SELECTOR SWITCHES USE SOLID SILVER CONTACTS, BECAUSE SOLID SILVER . . .

1. Has the highest conductivity of materials available.
2. Is superior to silver-plating which wears off, resulting in high resistance contacts.
3. Should it corrode the sulphide formed does not appreciably increase the contact resistance.

Creators and Makers of

Accurate Resistors—Switches—Special Equipment and Special Measuring Apparatus for Production and Routine Testing of Electrical Equipment on Military Aircraft . . . Ships . . . Vehicles . . . Armament . . . and Weapons

SAMA

SHALLCROSS MFG. CO.

COLLINGDALE, PENNA.

Membership

(Continued from page xxii)

Admission to Associate

Barnes, B. B., 124 Alden Ave., North Chattanooga, Tenn.
Baum, M. W., 31 W. 91 St., New York, N. Y.
Bereston, I. A., 2239 Eutaw Pl., Baltimore, Md.
Birnbaum, G., 830 S. Michigan Blvd., Chicago, Ill.
Bloom, A., Rumson Area, C.E.S.L., Rumson, N. J.
Bolljahn, J. T., 1260 Pleasant St., S.E., Washington, D. C.
Boyer, J. M., 4315½ Ocean Dr., Manhattan Beach, Calif.
Brule, C. G., Detroit Institute of Technology, Detroit, Mich.
Burdsall, N. H., 1645 Blackhawk St., Chicago, Ill.
Carvagal, H. H., Radio Sound, Santiago, Chile
Charles, P., Hindustan Aircraft P. O., Bangalore, South India
Chatterjee, A., 24 D Mahesh Chandra Dutt La, Alipur, Calcutta, India
Coatney, A. E., R.F.D. 5, Bloomington, Ind.
Conner, R. E., 2131 F. St., Sacramento, Calif.
Cozzens, W. B., RTIC, USS *Tangier* (AV8) c/o Fleet P. O., San Francisco, Calif.
Crow, J. R., 5530 Corteen Pl., North Hollywood, Calif.
D'Alessandro, S. J., 891 Broadway, Newark, N. J.
Davis, H., 172 Avenel Blvd., Long Branch, N. J.
DeHaan, J., 10141 Parnell Ave., Chicago, Ill.
DeMarcos, E. C., R.C.A.F. Station, Scoudouc, N. B., Canada
DeMerritt, L. G., 6206 N.E. 28 Ave., Portland, Ore.
Deuring, W. G., Jr., 3411 Bader Ave., Cleveland, Ohio
Dollscheck, C. W., 2782 Constitution Rd., Camden, N. J.
Dougherty, J. D., 2474 Iroquois Ave., Detroit, Mich.
Eggleston, A. E., 426½ W. Lovett St., Charlotte, Mich.
Eisenberg, M., 1928 W. Airdrie St., Philadelphia, Pa.
Ellis, P. V., 29 W. Kensington St., Astoria, Ore.
Eveland, E. H., 88 Kenwood Rd., Garden City, L. I., N. Y.
Farrell, L. H., 301 Washington St., Dover, N. H.
Flomenhoft, M., 41–60 Little Neck Pkway, Little Neck, L. I., N. Y.
Flynn, F. J., CRT (PA) USN, Navy Yard Pearl Harbor, T. H.
Fry, J. A., 1215 Pacific Highway, Turramurra, N. S. W., Australia
Furst, R. E., 540 W. Wellington Ave., Chicago, Ill.
Garoutte, C. D., 6921 Julian Ave., St. Louis, Mo.
Garri, M. E., Misiones 172 piso 2 dto. E., Buenos Aires, Argentina
Gauntlett, G. A. R., 8 Worthington Ave., Cross Roads, Jamaica, B.W.I.

(Continued on page xxvi)

SALUTE TO THE WOMEN OF TOMORROW!

Science will eliminate more and more household drudgery

RESEARCH AND INVENTION have been speeded up by the war—the tragedies of today will, in the not-too-far-distant future, be transformed into the blessings of peace.

The women of tomorrow will step out of the bondage of household chores into more zestful, more creative living. More and more, they will share with men in the re-making of this world.

Typical of the forward-looking companies which will translate the visions of today into the actualities of tomorrow is Small Electric Motors (Canada) Limited.

This virile, rapidly-expanding industrial organization, now engaged solely in war work, is planning an important post-war future. From its large, modern plant will come electrical equipment of revolutionary design —for ships and planes—for factories and homes!

DESIGNERS
AND MANUFACTURERS
of all types of precision electrical apparatus including

D.C. & A.C. Motors for specialized purposes
Aircraft Generators
Aircraft Engine Starters
Alternators
Motor Generators
Electric Pumps
Motors with Governors
Gyros, etc.

Small Electric Motors (Canada) Limited

and its subsidiary

Semco Instruments Limited

3-43

LEASIDE • TORONTO 12 • CANADA

Clarostat is now 100% on war production. Greatly expanded plant facilities are keeping pace with rising requirements. An engineering and manufacturing background second to none, is solving many tricky problems these days.

Multiple CONTROLS

★ An entirely new design for tandem controls. New molds provide unit casings that nest and lock together. Metal end pieces and tie rods insure rigid assembly —even up to 20 units in tandem. Single shaft passes through and locks with rotor of each control. Each control accurately wound to precise circuit requirements — resistance, taper, taps, hop-off. Interlocking resistance ratios provide any desired voltage or current at given degree of rotation. These Multiple Controls are now in regular production and meeting the most rigid multi-control requirements.

★ Send Us Your Problem . . .

No matter how complex or how simple—provided it has to do with control by means of resistance. Let us quote on your high-priority resistance or control requirements. Literature on request.

CLAROSTAT Controls and Resistors

CLAROSTAT MFG. CO., Inc. · 285-7 N. 6th St. Brooklyn, N. Y.

Membership

(Continued from page xxiv)

Gittens, R. N. W., Box 166, Barbados B.W.I.
Glenn, A. B., 3155 Ave. I, Brooklyn, N. Y.
Goodrich, H. C., Jr., 14375 Artesian, Detroit, Mich.
Harrison, C. E., 4530a W. Papin St., St. Louis, Mo.
Hoff, A. H., 375 E. Virginia St., Phoenix, Ariz.
Holt, W., 39th Signal Co., A.P.O. 26, Fort Jackson, S. C.
Howard, F., 24 Chapel Rd., Northenden, Manchester, England
Howell, H. H., 1615 Second Ave., Seattle, Wash.
Jackson, R. S., 368 W. Spazier Ave., Burbank, Calif.
Johnson, R. L., 3503 Walbrook Ave., Baltimore, Md.
Keel, J. J., 3901 Yolando Rd., Baltimore, Md.
Kern, A. W., 218 S. Adams, Spokane, Wash.
Ketcham, A. R., The Toledo Edison Co. Meter Dept., Toledo, Ohio
Koenigsberg, S., Box 316, Ft. Lauderdale, Fla.
Koros, L., Calle Formosa 240, Buenos Aires, Argentina
Kow, L., 9A Barnard Gdns., Hayes, Middlesex, England
Kritzmire, A. D., 328 Customhouse, San Francisco, Calif.
Kurlansky, S., 147½ Congress St., Milford, Mass.
Lamb, D. B., 229 W. First St., Mesa, Ariz.
Lanz, J. E., 37 Manville Ave., Box 276, Asbestos, Que., Canada
Layne, C. N., 181 W. Fourth Sq., Logan, Utah
Lindsay, W. F., 2340 Primorse St., Ft. Worth, Tex.
Lippmann, B., 9 Jane St., New York, N. Y.
Loretz, H. G., Ninth Service Command Signal Repair Shop, Ft. Lewis. Wash.
Lucyk, J., Aerovox Canada, Ltd., Hamilton, Ont., Canada
McAdam, J. C., Rt. 3, Allegan, Mich.
McClean, J. F., Box 291, Goshen, N. Y.
Maeshner, E. A., 1870 Sunset Blvd., San Diego, Calif.
Mathias, B., 738 Leonard St., Toledo. Ohio
Miles, J. G., Sylvania Electric Products, Inc., Williamsport, Pa.
Minton, R. W., 1037 Lucile Ave., S.W., Atlanta, Ga.
Morlock, W. J., 3723 N. Denny St., Indianapolis, Ind.
Morrison, H. G., Signal Section, 32nd Sub-Depot, Paine Field, Everett, Wash.
Moss, T. M., 570 Oak Dr., Hapesville, Ga.
Niles, J. G., 818 Tonawanda St., Buffalo, N. Y.
Pader, A. F., 3334 S. Lowe Ave., Chicago, Ill.
Patrick, W. L., Box 1131, Laurel, Mass.
Potter, J. D., 2448 Hutchinson St., Chicago, Ill.
Reed, R. D., 3625 Nottinghamway St., Hamilton Sq., N. J.

(Continued on page xxviii)

We are not zealous here at Sylvania to be the largest in our field. We had rather be known for excellence than for size. You have heard of the man so painstaking that to his talented fellows of larger fame he is known as the writer's writer, or the painter's painter, or the singer's singer. We understand that, and it seems to us there could be no higher praise. So in all the things we build – incandescent lamps, fluorescent lighting equipment, radio and electronic tubes – we aim uncompromisingly high, high as we possibly can. The function of these things, conceived as they are to amplify the indispensable miracles of human sight and hearing, seems to us to deserve the very best that can be given. So believing, it is only natural we should seek in all our work to attain the highest standards anywhere known.

SYLVANIA ELECTRIC PRODUCTS INC.

EMPORIUM, PA.

MAKERS OF INCANDESCENT LAMPS, FLUORESCENT LAMPS, FIXTURES AND ACCESSORIES, RADIO TUBES, CATHODE RAY TUBES AND ELECTRONIC DEVICES

INDUSTRIAL ELECTRONICS is doing much to help win the war on the production front, but can do a great deal more by more widespread application. Sylvania Electronic Tubes for devices that can automatically gauge, count, control, actuate, test, detect, protect, guide, sort, magnify, heat, transform, "see," "feel" and even "decide" are tested and available. The more electronic "know how" is put to work to make precision war production speedier and more precise, the sooner the Victory.

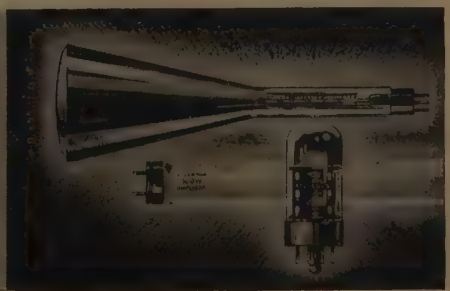

Now serving on all fronts

★ In aircraft plants, engine shops, powder works, ballistic laboratories, radio, electrical and other plants; in research laboratories and engineering departments shaping the weapons and tools of today and tomorrow; on the fighting fronts afloat and ashore—yes, in every phase of this great Battle for Democracy, DuMont Cathode-Ray Oscillographs are in the service.

For the most part, standard type DuMont Oscillographs are employed. An adequate selection of standard types meets the wide range of requirements. But for the highly specialized needs arising out of the drastic industrial and military demands of the war, special models are constantly being developed and built. Regardless of the need, a DuMont Cathode-Ray Oscillograph or related instrument is available.

★ ★ ★ ★ ★

Write for Literature . . .

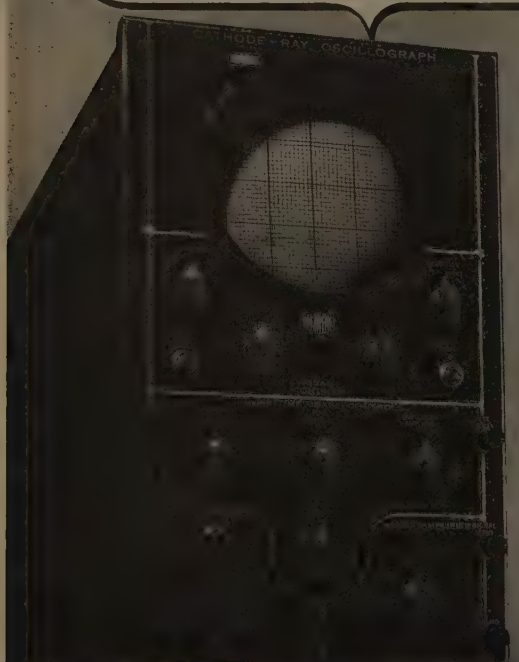

Wide selection of DuMont Oscillograph models—3" to 20".

DuMont Electronic Switch for placing two simultaneous signals on single tube screen.

DuMont Low-Frequency Linear-Time-Base Generator, providing sweeps as low as 1 cycle every few seconds.

Type 224 Oscillograph, with frequency response up to 2,000,000 cycles per second.

DuMont Cathode-Ray Tubes from 3" to 20". Choice of persistence screens.

★ ★ ★

DU MONT
Type 208
OSCILLOGRAPH

DUMONT

ALLEN B. DU MONT LABORATORIES, Inc.
Passaic · New Jersey
Cable Address: Wesperlin, New York

Membership

(Continued from page xxvi)

Richards, A. W., 352 Hunter St., E., Hamilton, Ont., Canada

Roach, F. T., 323-A Customshouse, San Francisco, Calif.

Robinett, L. L. Jr., American Telephone & Telegraph, Co., 32 Sixth Ave., New York, N. Y.

Rogers, G. D., 224 High St., Berea, Ohio

Scully, W., 823 W. Fourth, Spokane, Wash.

Sheffield, J., Northern Electric Co., 1261 Shearer St., Montreal, Que., Canada

Shoemaker, L. E., 3642 Horner Pl., S.E., Washington, D. C.

Sill, K. B., c/o Postmaster, San Diego, Calif.

Slusser, E. A., 51 Brattle St., Cambridge, Mass.

Smolen, A., 35–36—76 St., Jackson Hts., L. I., N. Y.

Spies, D., 383 Amherst St., East Orange, N. J.

Stone, D. F., 1805 N. Eleventh Ave., Phoenix, Ariz.

Strange, E. M., Box 94, Laramie, Wyo.

Taylor, D. H. J., 225 Blossomfield Rd. Solihull, Birmingham, England

Taylor, T. W., Box 5293, T. C. Station, Denton, Tex.

Taylor, W. E., Jr., 2917 Graham Blvd., Wilkensburg, Pa.

Terry, E., 108 Rutland Rd., West Bridgford, Nottingham, England

Tousley, P., 816 Simpson, Evanston, Ill.

Van Der Harst, J., Hillside Ter., Irvington, N. Y.

Van Sleen, R., 508 W. Third Ave., Gastonia, N. C.

Wadham, C. W., Telegraph Engineers Office, Box 81, Gisborne, N. Z.

Ward, J. E., 47 Park Ave., Rumson, N. J.

Watson, W. H., McGill University, Montreal, Que., Canada

Whitman, A. J., 708 South Ave., Schenectady, N. Y.

Widlar, W. L., Jr., 1299 Bonnieview Ave., Lakewood, Ohio

Wiejek, A. J., 116 H St., West Belmar, N. J.

Williams, G. T., 111 Galyan Dr., Bremerton, Wash.

Wilson, F. R., 10519 Valley Spring La., North Hollywood, Calif.

Wilson, T., Jr., Box 4364 Atlanta, Ga.

Wyckoff, H. O., 1357 Jefferson St., N.W., Washington, D. C.

Wyman, B. D., 119 Colonial Rd., Rochester, N. Y.

WE *Can* DO MORE!

With sleeves rolled up, Americans are determined to do the utmost to back up the boys at the fighting fronts. There seems to be almost no limit to American ingenuity, engineering know-how and mass production methods. Electronic Corporation of America is now in full production on 100% war work . . . but we *can* do more! ECA is pledged to do all in its power . . . and then a little more . . . to help win the war quicker!

To Manufacturers and Government Agencies

The Electronic Corporation of America factory is perfectly set up for the manufacture and assembly of electronic devices and equipment. ECA invites inquiries from manufacturers and government agencies who can make use of our facilities and experience to help win the war sooner.

ECA

ELECTRONIC CORPORATION OF AMERICA

"Let's Win the War Now! . . . with the Utmost in Production"

Buy More—**AND MORE**—War Bonds!

ELECTRONIC CORPORATION OF AMERICA

45 WEST 18th STREET, NEW YORK CITY • • • PHONE WAtkins 9-1870

Can An ENGINEER Be A *Businessman?*

Let's talk sense.

We know we're talking to high-type professional radio engineers who can't be kidded with a lot of meaningless words. . . .

But. . . .

We do think the average engineer is businessman enough to realize, and want to capitalize on, the opportunities that are now available to every radioman who wants to take advantage of them. . . .

The engineer who is looking for an important place in the postwar field of radio and industrial electronics, will find that by investing a few hours each week in a planned program of home study offered by CREI . . . he will bring his knowledge up-to-date . . . obtain practical help in his daily work . . . and develop his ability to cope with any technical radio problem.

In an industry that is expanding as rapidly as radio, CREI home study in Practical Radio Engineering takes on new importance. CREI offers a proven plan for personal advancement for the high calibre men to whom radio looks for its efficient operation and progressive development.

One CREI student, a broadcast engineer, recently wrote: **"I found your course sufficiently advanced for a college graduate, and of an engineering nature."**

★

We will be glad to send our free descriptive booklet and complete details to you, or to any man whom you think would be interested.

CAPITOL RADIO ENGINEERING INSTITUTE

E. H. RIETZKE, *President*

Home Study Courses in Practical Radio Engineering for Professional Self-Improvement

Dept. PR., 3224—16th Street, N.W. WASHINGTON, D.C.

Contractors to the U. S. Signal Corps—U. S. Coast Guard

Producers of Well-trained Technical Radiomen for Industry

New Equipment Notes

A Waterproofing Material for Radio Ceramic Forms

An invisible "raincoat" which can be formed on cloth, paper and many other materials by exposing them to chemical vapors from a new compound, thereby making them water-repellent, has been developed in General Electric's Research Laboratory at Schenectady, N. Y., by Dr. Winton I. Patnode who is studying many possible uses of this new method of waterproofing.

Called Dri-Film, one of its most important uses so far is the treatment of ceramic insulators for radio equipment being made for the armed forces of the United States. It is about nine times more effective than the wax used at present as a water repellent, and its results are permanent.

Dri-Film is a clear liquid composed of various chemicals which vaporize at a temperature below 100°C. Articles to be treated are exposed, in a closed cabinet, to the vapors for a few minutes. Then they are taken out and, if necessary, are exposed to ammonia vapor. This is to neutralize corrosive acids which may collect during treatment.

Dr. Patnode is not able to explain exactly what happens in the process, but the result is that an extremely thin film is formed on the surface. This "raincoat" is so thin that its structure cannot be determined by chemical analysis. It cannot be seen under a high-powered microscope. But, whatever its nature, it prevents water from spreading to form a continuous film. If moisture does collect, it is in the form of small isolated drops.

Probably the biggest use of ceramic forms today is in radio communications equipment where high electrical resistance between conductors is absolutely essential to successful performance. Ceramic insulators, when dry, provide extremely high electrical resistance. However, in service one of the adverse conditions frequently met has been condensation of moisture on the surfaces of the ceramic forms. Such condensation, if not controlled, forms a film of water and reduces the resistance between conductors to the point where excessive leakage of current results, and the performance of the equipment is impaired. Consequently, manufacturers have for years treated ceramic parts, built into this type of apparatus, with materials which to a greater or less degree reduce the effects of condensation. In the past, the best methods of treating these parts have been varnishing and waxing. Searching for a better and more effective method, there was developed the new and radically different treating material.

Laboratory tests show the wide difference in the water-repellent characteristics of ceramic surfaces when glazed or treated with wax, and with the new compound. These tests were made under conditions of temperature and humidity similar to those met by military forces in service from the arctic to the tropics. Tests of surface re-

(Continued on page xxxii)

electronic TRANSFORMERS

Acme electronic transformers are made-to-measure, for each application. That's why independent, unbiased tests give Acme first choice in performance. Acme engineers combine exact electrical specifications with mechanical limitations into precision-made transformers that provide for maximum performance of the electronic device.



POWER OR FILAMENT TRANSFORMERS

Acme case designs require minimum mounting area. May be mounted on bottom, or suspended from top or side. Produced to specifications in sizes from 50 VA to 500 VA.

FILAMENT TRANSFORMERS

Type T-7025 Acme Filament Tranformer for 2—866 Rectifier Tubes. Requires minimum mounting space; mounting centers for 25 VA, only 3" x 3½", height 3¾. Precision-made to specifications in production quantities in ratings from 25 VA to 1½ KVA.

MINIMUM WEIGHT AIR-BORNE TRANSFORMERS

Acme compound-filled, sealed case Audio, Driver, Interstage transformers, Reactors and Microphone input transformers are built to withstand and satisfactorily perform under extreme temperature variations. Bulletin 159 tells why. Write for your copy today.

THE ACME ELECTRIC & MFG. CO.
44 WATER ST. CUBA, N. Y.

Acme Electric TRANSFORMERS

IRC VOLUME CONTROLS HAVE *All* THE FEATURES

No single attribute is responsible for the definite preference so often expressed by electronic engineers for IRC Volume Controls. Rather the fact that each unit embodies *all* the important factors which make for dependable operation has earned the regard of many of the largest users of potentiometers. . . . For preferred performance under severe conditions, for accuracy, stability and long life—specify IRC Volume Controls.

1—Metallized Element
2—Spiral Spring Connector
3—5 Finger Positive Contact
4—2 Sizes—1⅛" and 1¼" diam.
5—2 Ratings—½ and 1½ Watts
6—Available for Salt Spray, Sealed, and High Altitude Performance.
MEMO
TO Purchasing Dept.
Note that IRC Volume Controls are again available. We prefer them
J.H.S.
P.S. check with IRC on Resistors too
S.
FROM ENGINEERING DEPARTMENT

ARMY E NAVY

First in the industry to win an E flag, IRC is first also to win a Star for sustained production

• PREFERRED FOR PERFORMANCE • IRC FIXED & VARIABLE RESISTORS

INTERNATIONAL RESISTANCE COMPANY

401 N. BROAD STREET • PHILADELPHIA

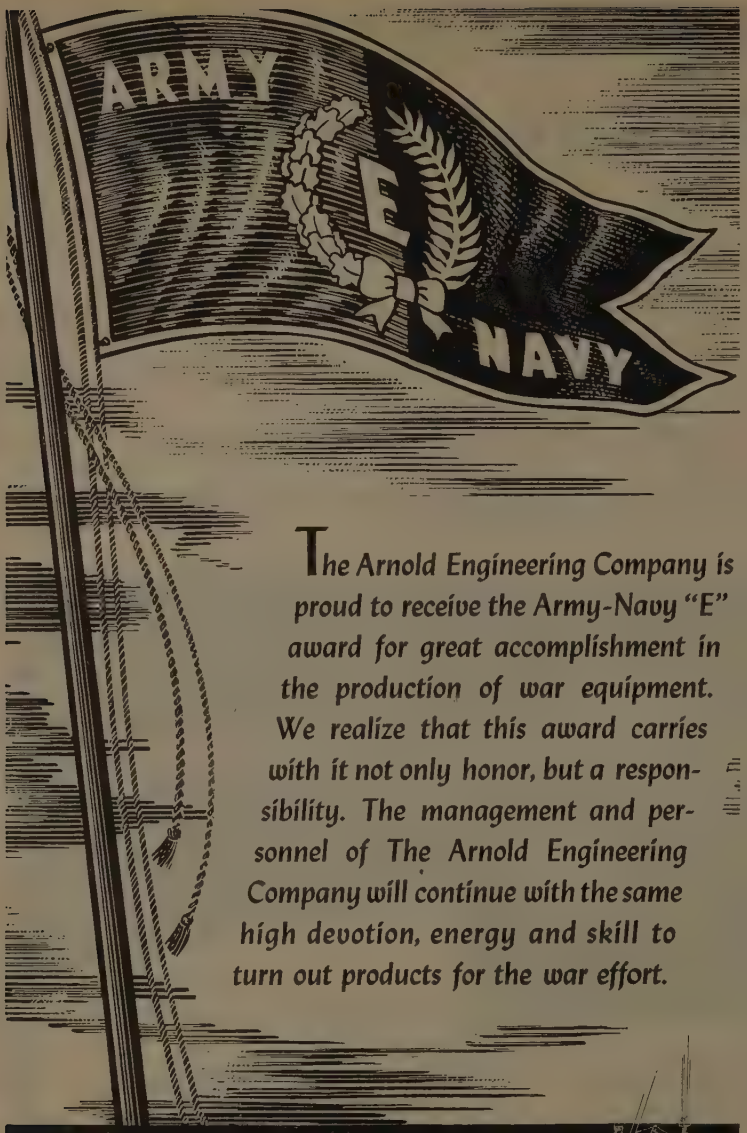
ARMY
E
NAVY
The Arnold Engineering Company is proud to receive the Army-Navy "E" award for great accomplishment in the production of war equipment. We realize that this award carries with it not only honor, but a responsibility. The management and personnel of The Arnold Engineering Company will continue with the same high devotion, energy and skill to turn out products for the war effort.
THE ARNOLD ENGINEERING COMPANY
147 EAST ONTARIO ST. • CHICAGO, ILLINOIS
Specialists in the Manufacture of
ALNICO PERMANENT MAGNETS
CAST ARMOR ★ SPECIAL ALLOYS

New Equipment Notes

(Continued from page xxx)

sistivity (a measure of resistance) were made on a number of closely controlled specimens which had been subjected to the condition of 100 per cent relative humidity at 25° C. with the ceramic parts precooled below the dew point. A value of 100 was arbitrarily assigned to the surface resistivity of unglazed ceramics that had been treated with wax. On the same basis of evaluation, parts treated with Dri-Film were found to have a surface resistivity of 870.

In addition to providing a high initial surface resistivity, the water-repellent treatment for ceramics must be able to withstand heat, handling, and cleaning. It should not increase the tendency of the surface to accumulate dust. Dri-Film, after application, is not adversely affected by heat up to 300° C. applied for short intervals. It is not susceptible to abrasion as the result of handling during assembly of apparatus or field maintenance. Finger prints and other dirt smudges can be easily removed from Dri-Film treated ceramics with a cloth or brush moistened with solvent.

Another use for the new compound is a laboratory one. The surface of water in laboratory glassware, such as measuring cylinders and hydrometers, is ordinarily curved, low in the center, because the liquid wets the walls and tries to climb up them. Such a curved surface, or "meniscus," is prevented if the inside of the container is treated with the water-proofing vapors from Dri-Film. Then the water surface is flat and its height may be read more easily.

Radio-Frequency Riveting

Radio frequency energy now is used to detonate explosive rivets and speed production of aircraft, *E. I. du Pont de Nemours & Company* announced recently. The radio unit assures instant control of temperature in the firing tip, eliminating time consumed in heating an electric iron to operating degrees and in frequent changes from one tip temperature to another. This method is adaptable only to large scale production. The electric riveting iron, now used widely, is still preferred for many types of work.

Explosive rivets were introduced two years ago, breaking a bad bottleneck in fastening airplane sections where riveters could work from only one side. They are installed at a rate of 15 to 20 a minute, as contrasted with two to four a minute for most "blind" fasteners.

The rivet has a high explosive secreted in a cavity at the end of the shank. Heat applied to the rivet head detonates the charge. The explosion expands the charged end of the shank, forming a "blind" head and setting the rivet.

Engineers of *Radio Corporation of America* and of *Du Pont* developed the radio unit, which consists of an oscillator together with a specially prepared applicator to concentrate current directly into the

(Continued on page xl)

RADIO RESISTORS for WAR SERVICE

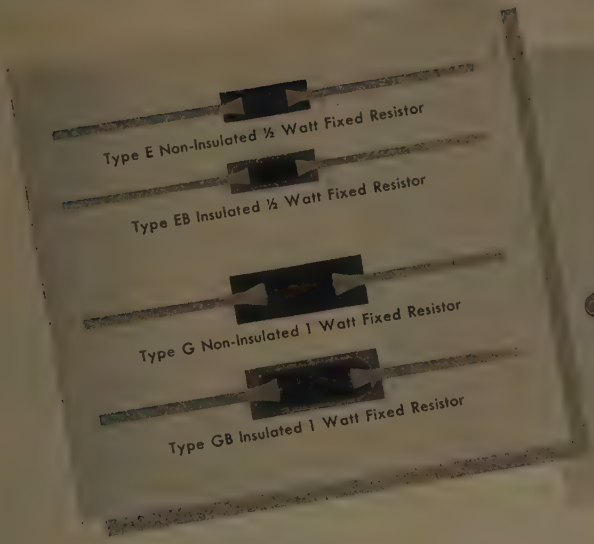
Type E Non-Insulated ½ Watt Fixed Resistor
Type EB Insulated ½ Watt Fixed Resistor
Type G Non-Insulated 1 Watt Fixed Resistor
Type GB Insulated 1 Watt Fixed Resistor

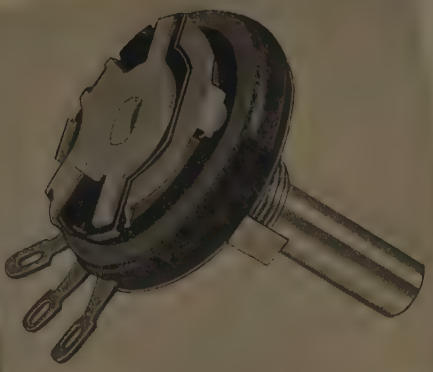

FIXED

Available in standard RMA values from 10 ohms to 10 megohms

BRADLEYUNITS—These sectional views show the molded homogeneous resistor material, insulation, and imbedded lead wires which make these resistors especially suited for tough war service.

Actual experience in laboratory tests and war service has proved that Bradleyunits function perfectly through a temperature range from −60° to +70° C. Made of inert material, they do not require any special wax impregnation to pass the salt water immersion test. These fixed resistors will sustain an overload of ten times rating for a considerable period of time without failing. Bradleyunits are the smallest — rating for rating — fixed resistors available, the ½ watt unit being ⅜" long and $\frac{5}{64}$" in diameter.

The manufacture of A-B fixed resistors is under continuous laboratory control. Uniformity of manufacture assures production of an exceptionally large proportion of resistors with ± 5% tolerance, while the remainder have the standard tolerances of ± 10% and ± 20%. Orders for resistors with ± 5% tolerance are solicited.

The A-B patented lead wire construction provides graduated tempering next to the resistor body and thus prevents sharp bends that would weaken the wire. Write for details today about Bradleyunits and Bradleyometers.



Type E ½ watt non-insulated Bradleyunit molded resistor



This indexed carton of 500 Allen-Bradley Fixed Molded Resistors speeds up production on the assembly line.

VARIABLE

Total resistance values from 60 ohms to 2 megohms

BRADLEYOMETER—Here is the only continuously adjustable composition type resistor (only one inch in diameter) having a rating of two watts with a substantial safety factor.

The resistor material in a Type J Bradleyometer is molded with the insulation, terminals, face plate, and threaded bushing into a single unit. It is not a film, spray, or paint type resistor. During manufacture, the resistor material can be varied throughout its length to provide practically any resistance-rotation curve. Once the unit has been molded, its performance does not change. Heat, cold, moisture, or tough service do not affect it. Long life and quiet operation are assured by the use of a low resistance carbon brush which makes a smooth contact with the surface of the molded resistor.

Bradleyometers not only have a high rating and current carrying capacity, but, due to simple construction and few parts, are exceptionally reliable. There are no rivets, no soldered or welded connections, and no conducting paints. Can be supplied for rheostat or potentiometer uses, with or without a switch.



Sectional view of the resistor unit

Type J Bradleyometer resistor units may be used separately or assembled to give dual or triple construction to fit any particular control need.

Allen-Bradley Co., 114 W. Greenfield Ave., Milwaukee, Wis.

A-B Quality

ALLEN-BRADLEY

FIXED & VARIABLE RADIO RESISTORS

QUALITY

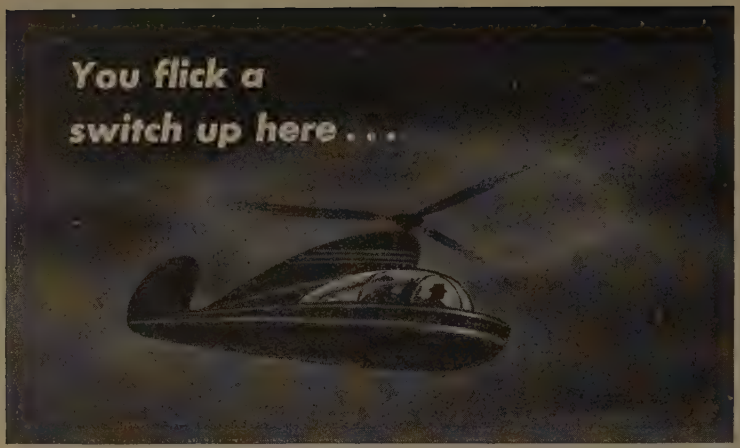

SAY you're "dropping in" unexpectedly on the Joneses for a visit some evening. Their "landing yard" is dark, so you push the button in your plane, and—presto!—the landing lights flash a welcome, and you alight smoothly and safely.

That's one of the logical and fascinating applications for radio remote control devices that you and I will need in the new age of flight that's dawning. There'll be countless others.

And so, while Jackson engineers are working overtime on America's number one job, they're also planning ahead, thinking about the test equipment that will be needed to build, service, and maintain communications equipment, servomechanisms, and other powerful electrical tools of tomorrow's world.

Much of our present line of tube testers, oscillators, signal analysers, multimeters, etc., will change; some of it will not. In any case, it will be fine equipment, soundly engineered, sold at fair prices.

All Jackson employees—a full 100%—are buying War Bonds on a payroll deduction plan. Let's ALL go all-out for Victory.

JACKSON

Fine Electrical Testing Instruments

JACKSON ELECTRICAL INSTRUMENT COMPANY, DAYTON, OHIO

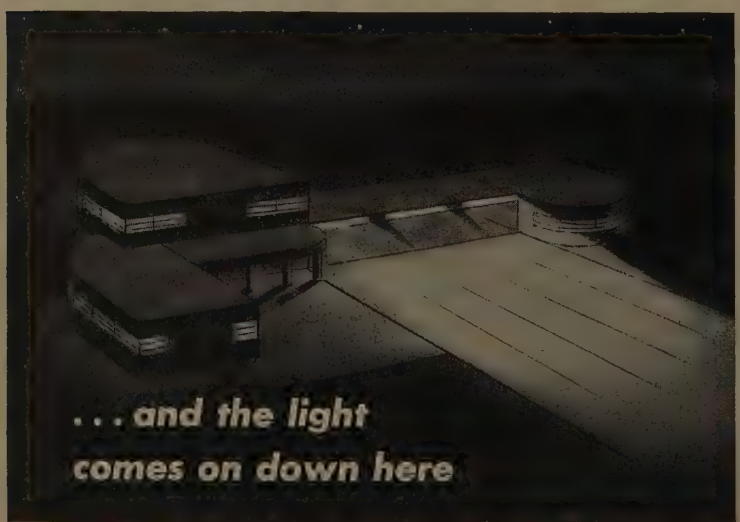

New Equipment Notes

(Continued from page xxxii)

rivet head. As current is induced in the head, the heat it creates fires the charge. Radio energy not only gives instant temperature control but prolongs indefinitely the life of the firing tip. The tip is always cool, an important safety factor. The same tip can be used for any kind of rivet head.

Improved Selenium Rectifier

An important addition to the I. T. & T. Selenium Rectifier line was recently announced by Henry H. Scudder, Manager of the *Selenium Rectifier Division of Federal Telephone and Radio Corporation*, manufacturing subsidiary in the United States of International Telephone and Telegraph Corporation.



I. T. & T. Selenium Rectifier Stack Assembly.

The outstanding feature of this new rectifier is the protection provided against excessive humidity and moisture conditions, encountered particularly in marine service. This improvement is made possible by a special assembly, which lends itself more readily to moisture-proofing. The standard petal-shaped brass contact washer and pressure-limiting fibre washer are not used. Instead a single metal washer is employed, making it possible to apply the protective coating to all exposed surfaces.

Conventional Rectifier Disc with petal-shaped brass contact washer.

The new rectifier incorporates, in addition, all the outstanding features of the conventional I. T. & T. Selenium Rectifier which was originated by I. T. & T. and

(Continued on page xlii)

To Preserve the FOUR FREEDOMS!

. . . freedoms that are uppermost in the heart of every American. Workers in industry have toiled unceasingly to build peak production to enable their country to be the world's best equipped fighting forces to protect these freedoms.

The Hallicrafters employees have twice been cited by their country for excellence in production . . . once with the Army-Navy "E" Burgee . . . and now the addition of a star to this Burgee for continued excellence in producing communications equipment so vitally needed by our boys on all fronts.

This new honor will serve as an additional incentive to greater production.

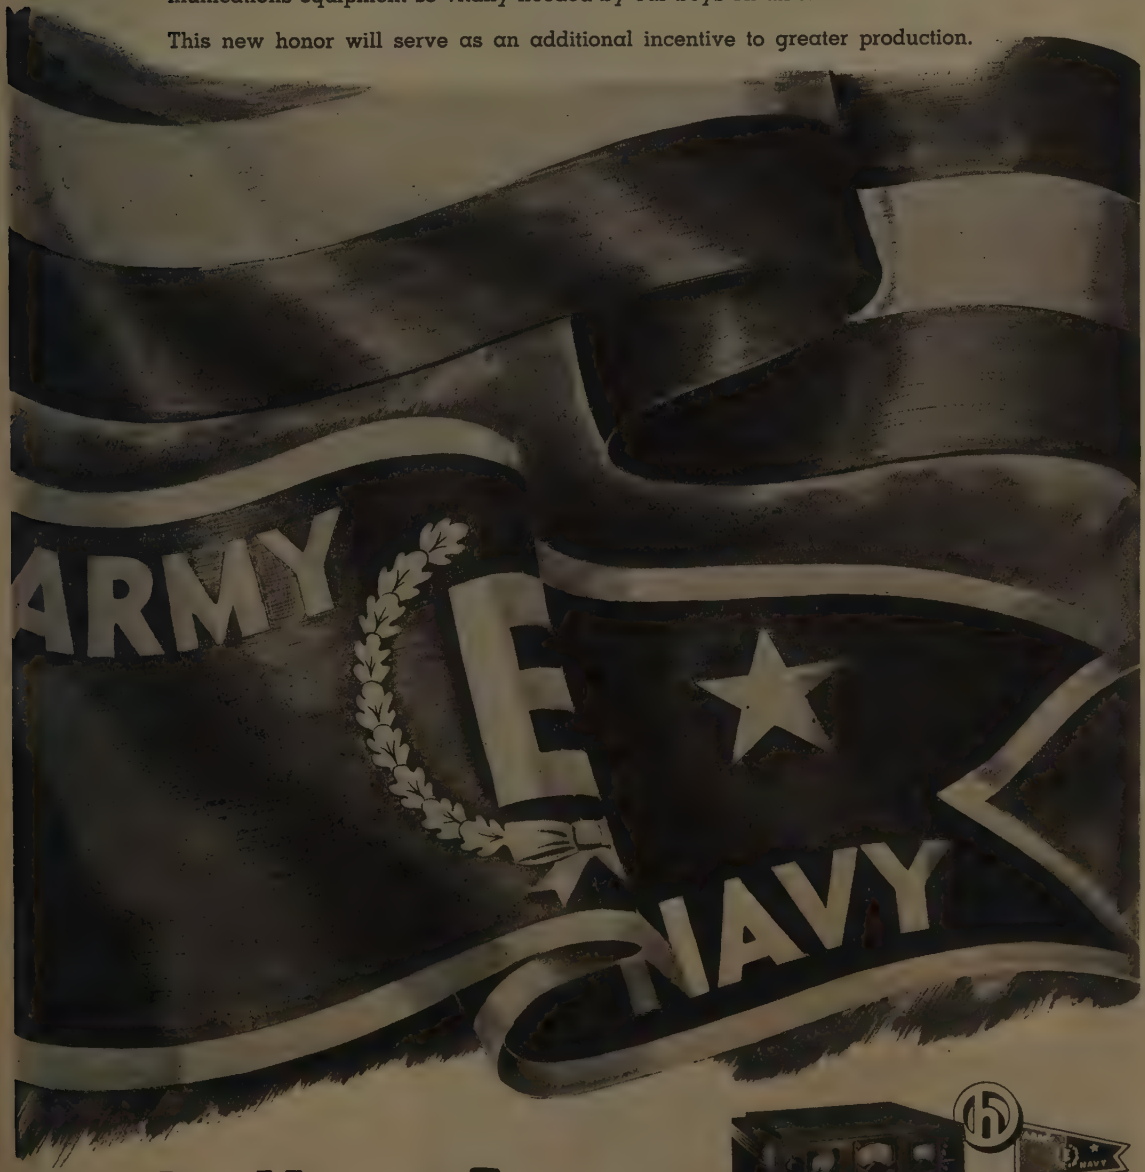

hallicrafters

CHICAGO, U.S.A.

BUY MORE BONDS!

★ *In a Hurry . . .*

REMLER

Plugs and Connectors

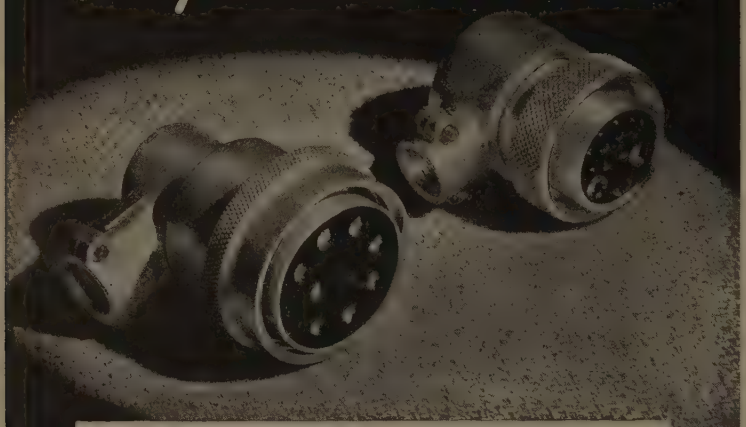

Illustrations: *PL-149* *PL-114*

ARMY SIGNAL CORPS

Specifications

	PL				PLP		PLQ		PLS	
50-A	61	74	114	150	56	65	56	65	56	64
54	62	76	119	159	59	67	59	67	59	65
55	63	77	120	160	60	74	60	74	60	74
56	64	104	124	354	61	76	61	76	61	76
58	65	108	125		62	77	62	77	62	77
59	67	109	127		63	104	63	104	63	104
60	68	112	149		64		64			

Prompt Deliveries • Inspection

Army Signal Corps inspectors, in constant attendance at Remler plants, check parts in progress as well as completed units. This assures uniformity.

SPECIAL DESIGNS TO ORDER

Remler has the experience and is equipped to "tool-up" and manufacture plugs and connectors of special design — IN LARGE QUANTITIES. State requirements or submit blue-prints and specifications.

Remler facilities and production techniques frequently permit quotations at lower prices

Manufacturers of Communication Equipment
SINCE 1918

REMLER COMPANY, Ltd. • 2101 Bryant St., San Francisco, Calif.

New Equipment Notes

(Continued from page xl)

often considered standard in the industry. Compactness, long life, light weight, and electrical and mechanical stability with no moving parts to wear out or cause failure are among the features retained in this special rectifier.



Rectifier Disc showing single metal washer which facilitates protective coating against corrosion.

Production of this special type of rectifier for the armed services is already under way, according to Mr. Scudder, and will be turned to the filling of commercial needs following the war

New Lightweight Thyratron Tube

Designed for applications where weight and space must be considered, a new thyratron tube with both a control and a shield grid for control applications, has been announced by the tube division of the *General Electric Electronics Dept.*, at *Schenectady, N. Y.* Designated as the GL-502, the new tube is a little over two and one-half inches long, weighs about two ounces, is inert-gas-filled and of all-metal construction. Applications for the new tube will be found in industrial welding and any general control equipment.

The control characteristic is stated to be practically independent of ambient temperature over a wide range. Since the grid current is low enough to permit the use of a high resistance in the grid circuit, the new thyratron has high sensitivity characteristics. The grid-anode capacitance is low enough so that the new tube is relatively unaffected by line-voltage surges. It has a maximum peak inverse anode voltage rating of 1300 volts, instantaneous current rating of 500 milliamperes, and an average current rating of 100 milliamperes. The cathode is quick heating and is rated at 6.3 volts, 0.6 ampere.

Dakar Linked With New York by New Radio Circuit

Extending direct radio communication service to another sector important in United Nations war strategy, a radiotelegraph circuit between New York and the West African key port of Dakar opened on March 10, 1943 by R.C.A. Communications, Inc.

(Continued on page lii)

THE ONLY REAL

HERMETICALLY-SEALED RESISTORS

...that will stand the most severe salt water immersion and temperature shock tests

SPRAGUE

KOOLOHM

POWER WIRE WOUND RESISTORS AND METER MULTIPLIERS

These Koolohms, designed for the toughest resistor applications facing the industry today, again emphasize the importance of exclusive Koolohm construction features combined with Koolohm engineering ingenuity in solving almost any wire wound resistor problem.

For Koolohms are entirely different from conventional wire wounds. There are no other resistors like them. No other type of resistor can match their performance on exacting jobs. AVAILABLE WITH NON-INDUCTIVE WINDINGS. Get the facts! Write for catalog and sample Koolohms. SPRAGUE SPECIALTIES COMPANY (Resistor Division), North Adams, Mass.

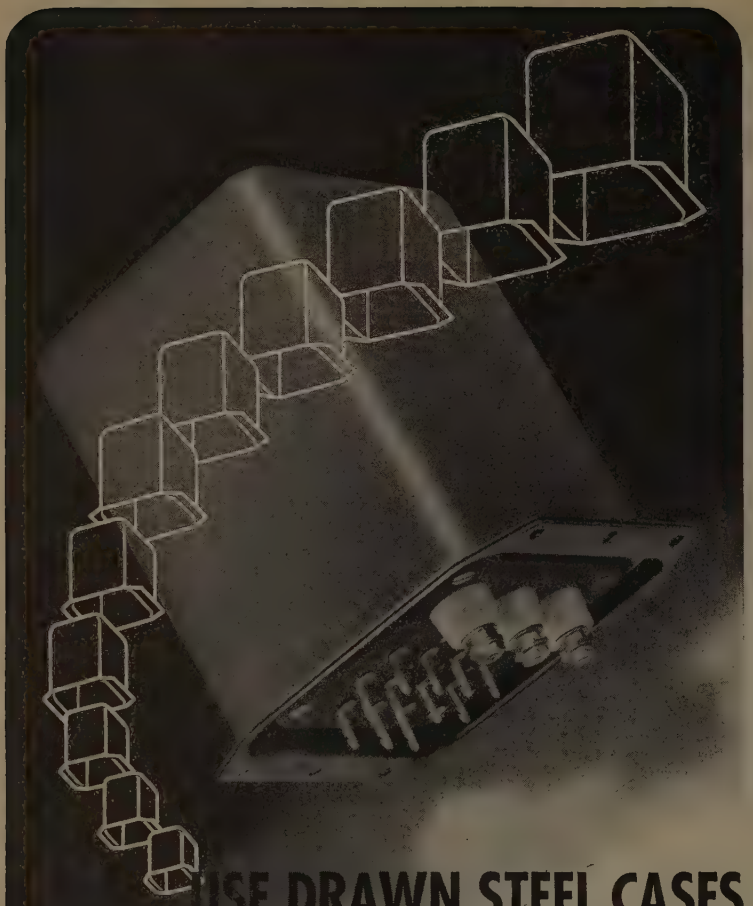

USE DRAWN STEEL CASES

For Toughness, Shielding and Better Sealing

A one-piece Drawn Steel Transformer Case without seams or spot welds is, because of its simplicity, the strongest type of mechanical construction. Then, too, the one-piece construction provides an unimpeded electrical and magnetic path resulting in better shielding from outside electrical disturbances. Absence of seams also assures maximum protection against atmospheric conditions—guarantees longer transformer life.

If your transformers have to pass the most rigid tests, Potted Transformers in Drawn Steel Cases are probably your answer. Write for information on this Drawn Steel Case line!

Pioneers of the Compound Filled Drawn Steel Transformer Case

CHICAGO TRANSFORMER

CHICAGO TRANSFORMER CORPORATION

3501 WEST ADDISON STREET • CHICAGO

New Equipment Notes

(Continued from page xlii)

Formerly, telegraphic messages between the United States and French Africa were routed by way of London. With this direct radio circuit in operation, message traffic will move much faster and more cheaply since a 15 per cent reduction in the rate has been announced.

The new service is to be operated in cooperation with the Administration of Posts, Telegraph & Telephone of French West Africa. Other direct radiotelegraph circuits of the same company with African terminals link New York and Monrovia, Liberia; Leopoldville, Belgian Congo; Brazzaville, French Equatorial Africa, and Cairo, Egypt. A radiophoto circuit also operates between New York and Cairo.

A direct radiotelegraph circuit between New York and Quito, Ecuador, is being tested by the company preliminary to the start of regular commercial operations within the next few days. Until now, Ecuador, where a complete cable monopoly has existed, has been the only South American country closed to radiotelegraphic communication. The Government of Ecuador is cooperating with the company in setting up this new radio service. With the addition of Quito, sixteen Latin American nations will be linked with this country by its direct radiotelegraph circuits. It is stated that the radio equipment for the Quito station has been designed and built by the RCA Victor Division of Radio Corporation of America.

Army-Navy "E" Honor Roll

(Continued from page xxxviii)

Shure Brothers Win "E" Pennant

On Sunday, April 18, the entire organization of Shure Brothers met at Thorne Hall, Northwestern University to receive the coveted Army-Navy "E" pennant and employee pins for excellence in war production. Lieut. Colonel Nathan Boruszak made the address and presentation, and Mr. S. N. Shure, General Manager, accepted the award. Lieut. Commander G. C. Norwood made the presentation of pins, and Marion De Block represented the employees in accepting the pins.

This company has been engaged in the engineering and manufacturing of special Microphones, for use in battle equipment by the U. S. Army and Navy.

White Stars to RCA Divisions

Robert P. Patterson, Under Secretary of War, announces the awarding of a white star to the Radio Corporation of America's plant at Harrison, N. J., on April 12. The Harrison plant won its Army-Navy "E" flag on September 8, 1942. "The white star, which the renewal adds to your Army-Navy production Award Flag," said Under Secretary Patterson, "is the symbol of appreciation from our Armed Forces for your continued and determined effort and patriotism."

The same award has been won by the Radiomarine Corporation of America which originally won its Army-Navy "E" pennant in December, 1942. To its achievements in March, 1943, has been added the U. S. Maritime Commission "M" pennant and Victory Fleet Flag in recognition of its production record in supplying radio equipment to cargo vessels.

Meeting the mica-capacitor shortage . . .

In three sizes:
5/16 x 1-3/16"
7/16 x 13/16"
7/16 x 1"

• An alternate choice for those hard-to-get mica capacitors in most applications—that was the problem put up to Aerovox engineers.

Various applications were studied. Voltages, capacitances, frequencies, power factor—these and other factors were considered along with dimensional limitations, after the manner of A.A.E.* Out of it all evolved this new Aerovox Type 38 mica-capacitor alternate now in production.

Here is a miniature oil-filled metal-case tubular. Ideal for assemblies where both space and weight are at absolute minimum. Requires no more space than mica capacitor it replaces. Conservatively rated. No skimping of insulation or oil-fill despite minute dimensions (see drawing). Meets all standard specifications for paper-dielectric capacitors used as mica alternates. (See brief specifications.)

Type 38 mica-capacitor alternate is but one of several new wartime capacitors described and listed in our latest Capacitor Catalog. Write on business letterhead for your registered copy.

*Aerovox Application Engineering.

FEATURES

Metal case. Double-rubber-bakelite terminal-insulator assembly.

Both terminals insulated or with one terminal grounded to case. Pigtail terminals.

Normally without outer sleeve. Can be had with insulated sleeve, adding 1/16" to diameter and length. Note dimensional drawing.

Vegetable (Hyvol) or mineral oil impregnant and fill.

300 to 800 v. D.C.W. Capacities of .001 to .01 mfd.

Capacitance tolerances up to but not including .01 mfd. —20% +50%; .01 mfd. —10% +40%.

OUR WAR EFFORT

From January 1941 to December 1942, Aerovox . . .

- Stepped up production output 500% for our armed forces.
- Increased production floor space 300%.
- Sought, hired, trained and put to work additional workers—a 300% increase in productive personnel.
- Opened second plant in Taunton, bringing work to available workers there.
- And—doing more and more; growing week by week!

AEROVOX

Capacitors

INDIVIDUALLY TESTED

AEROVOX CORPORATION, NEW BEDFORD, MASS., U. S. A. • SALES OFFICES IN ALL PRINCIPAL CITIES
EXPORT: 13 E. 40th ST., N. Y. C. • CABLE: "ARLAB" • IN CANADA: AEROVOX CANADA LTD., HAMILTON, ONT.

HOW TO SAVE UP TO 47% ON ELECTRICAL COIL FORMS!

HERE'S ALL YOU DO TO MAKE ROCK BOTTOM SAVINGS

READ THIS QUICK CHECK LIST THEN MAIL COUPON FOR COMPLETE STORY!

YOU ENJOY LOWEST PRICES WHEN YOUR COIL FORMS COME WITHIN THESE STANDARDS

*1. **OUTSIDE DIAMETERS** between 1 inch and 3 inches.

*2. **WALL THICKNESSES** between 5/32 inch and 9/32 inch.

*3. **LENGTHS** up to 9 inches (with better prices for shorter lengths).

4. **MAXIMUM** of 20 holes for coil forms ¼ inch and 9/32 inch thick with maximum of 4 holes tapped.

5. **MAXIMUM** of 10 holes for coil forms 5/32 inch to 7/32 inch thick with maximum of 2 holes tapped.

6. **MAXIMUM** of 14 grooves to the inch.

*7. **TOLERANCES** on general dimensions ± 2.0%, but not less than ± 0.010 inches.

**Proposed A.S.A. Standards.*

In addition to low-cost standard types, Corning Multiform Insulators may be had in almost any other size or shape.

CLIP THIS COUPON TO YOUR BLUE PRINT- MAIL TODAY FOR ACCURATE QUOTATION!

Corning Glass Works
Insulation Division, Dept. P-66, Corning, N.Y.

Please send us estimate on coil forms as per attached blueprint and data below:

Quantity.....

When Needed (date).....

Electrical Characteristics.....

.....

Acceptable Revisions.....

.....

Name.....

Company.....

Street.....

City.....State.....

Pyrex Insulators
BRAND

"PYREX" is a registered trade-mark and indicates manufacture by Corning Glass Works.

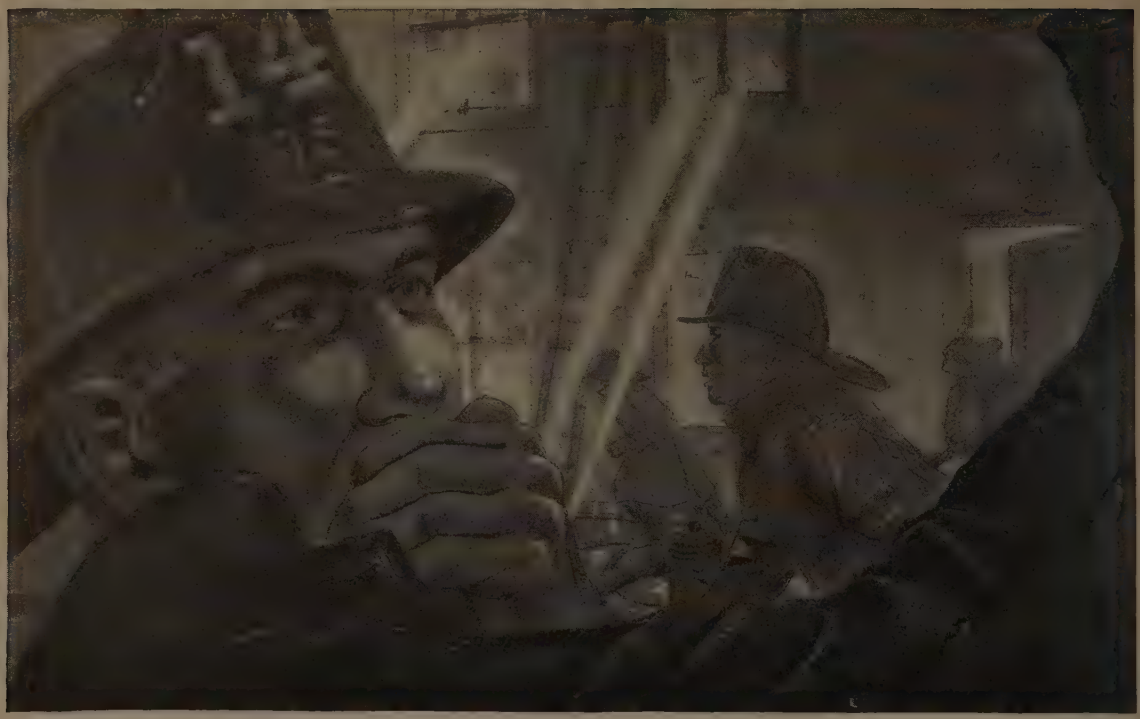

For tough assignments

Above the din of engine motors and excited spectators, a Fire Chief directs his men. The microphone in his hand has a tough assignment. Upon its ability to transmit clear, undistorted orders, free from extraneous noises, depends much of the action of the fire-fighters.

Some day the standard equipment of all fire departments will probably include Electro-Voice Microphones specifically designed for such applications. Right now, however, these new developments, like your boy, are away from home . . . in the thick of battle.

Meanwhile, if your limited quantity needs may be filled by any of our Standard Model Microphones, with or without minor modifications, we suggest that you contact your local radio parts distributor. His knowledge of our products will be of invaluable aid in helping you to solve your problems. He can also be a vital factor in expediting your smaller orders.

. . . Any model Electro-Voice Microphone may be submitted to your local supplier for TEST and REPAIR at our factory.

Electro-Voice MICROPHONES

ELECTRO-VOICE MANUFACTURING CO., INC. 1239 SOUTH BEND AVENUE, SOUTH BEND, INDIANA

Speaking of superior races . . .

EVERY WHEEL that rolls on the battlefield turns in a polished bearing race, ruggedly built to take the terrific shock of combat service.

To withstand such punishment, bearing races must be hardened by heat-treatment. Hard and soft spots occasionally occur. Such races may fail—at times when failure means disaster.

Recognizing the vital need, Westinghouse Research Engineers set to work to develop a quick, sure method of detecting these flaws.

Their ingenious electromagnetic flaw-detector is based upon the fundamental law that the *permeability* of a heat-treated steel part varies with the degree of hardness.

In actual practice, the bearing race is *completely* demagnetized. Then it is rapidly rotated and strongly magnetized. While the race is still turning at high speed, its magnetic field is explored with a specially designed electromagnetic "pick-up."

Variations in the magnetic field of the bearing race, due to hard or soft spots, induce feeble currents in the pick-up system. These currents are amplified and shown visibly on a cathode-ray oscilloscope.

A uniformly heat-treated bearing race traces a *luminous straight line* on the oscilloscope screen. Faulty heat-treating shows up as a pattern of *hills and valleys*.

The electromagnetic flaw-detector is now being used commercially—a typical example of Westinghouse *electronics at work*.

It assures quality in millions of bearing races for our armed forces, to keep 'em rolling on to victory!

Westinghouse Electric & Manufacturing Company, Pittsburgh, Pennsylvania.

Electronic fingerprints — A Westinghouse Research Engineer demonstrates the principle of the electromagnetic flaw-detector. Hard spots in the steel test piece show up as an irregular line on the oscilloscope screen.

Westinghouse • *Electronics at Work*

PLANTS IN 25 CITIES . . . OFFICES EVERYWHERE



ele

Eimac

ENGINEERING

The cornerstone in Eimac's existence has been their advanced electronic engineering. The development of the gas-free tube, pioneering in the use of new materials, radical changes in existing tube design... all these things are the results of their research. During today's accelerated business situation Eimac engineers have developed and put to work many outstanding innovations. Number one on this list is the actual achievement of mass production of a product that heretofore was hand-made in a scientific laboratory. Today the most interesting of the other developments must be kept secret but the heads-up engineering is going forward apace. The services of this organization are available only for war problems now but will be offered to industry at large when peace comes. If you have a problem, the solution to which might involve vacuum tubes, write direct to factory.



ronic telesis*

* Progress conciously planned and produced by intelligently directed effort.

— *Century Dictionary and Cyclopedia*

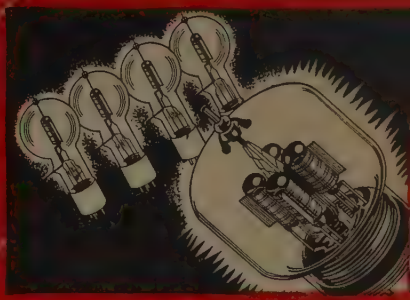

Eimac Tubes in the Ground Stations of the Major Airlines. The economy, stamina and superior performance capabilities of Eimac tubes helped make the operation of complex multi-frequency transmitters practical for aircraft ground stations. Eimac 450T tubes are in use by practically every major airline today.

Eimac Tubes in Instrument Landing Equipment. Airline pilots no longer need fly "by the seat of their pants" for blind landing equipment is in regular service. There are several of these systems in existence which use Eimac tubes.

Eimac Tubes and Frequency Modulation. Close cooperation between Eimac and the leading engineers throughout the world has made Eimac first choice in the important new development in radio. FM and Eimac tubes have been close companions from the very start of Major Armstrong's experiments.

Eimac Tubes in Police Radio Communications. Where dependability, stamina and superior performance are extremely vital you'll find Eimac tubes every time. Police radio engineers from Connecticut to California are loud in their praise of the service of Eimac tubes.

Eimac Engineered the Vacuum Condenser. Small, compact tank circuits, made possible with the Eimac vacuum condensers helped increase the efficiency of many types of radio transmitters. Since plate spacing is determined by mechanical rather than voltage limitations, actual plate area is reduced to the very minimum.

Eimac Developed the Vacuum Relay. Over two years ago Eimac developed this single pole double throw vacuum relay. It handles 20,000 volts of RF potential without internal breakdown. Air pressure and humidity have no effect on it. Actually flashover will occur across outside terminals first even though contact spacing is but .015". A tribute to Eimac engineering.

Eimac Developed the Multi-Unit Tube. Triode units so nearly perfect that two or more can be placed in a single envelope. Power capabilities are determined by multiplying the capabilities of the single triode unit by the number of units employed in the tube. A revolutionary vacuum tube typical of Eimac's engineering leadership.

Power Transmission with Vacuum Tubes? In the days to come many new uses for Eimac tubes will be announced. The use of vacuum tubes for power transmission may be one of them. Of one thing you can be sure, Eimac engineering and development will be in the forefront.

Eimac Tubes have gone to War. With almost machine gun rapidity, Eimac tubes have been adopted by one after another of the peacetime services. Naturally Eimac was among the first to be drafted into war. The important job they are accomplishing today must remain secret for the duration. When the shooting is over, you'll find out why the armed services turned to Eimac so quickly.

Coveted Army-Navy "E" award for high achievement in production for war.

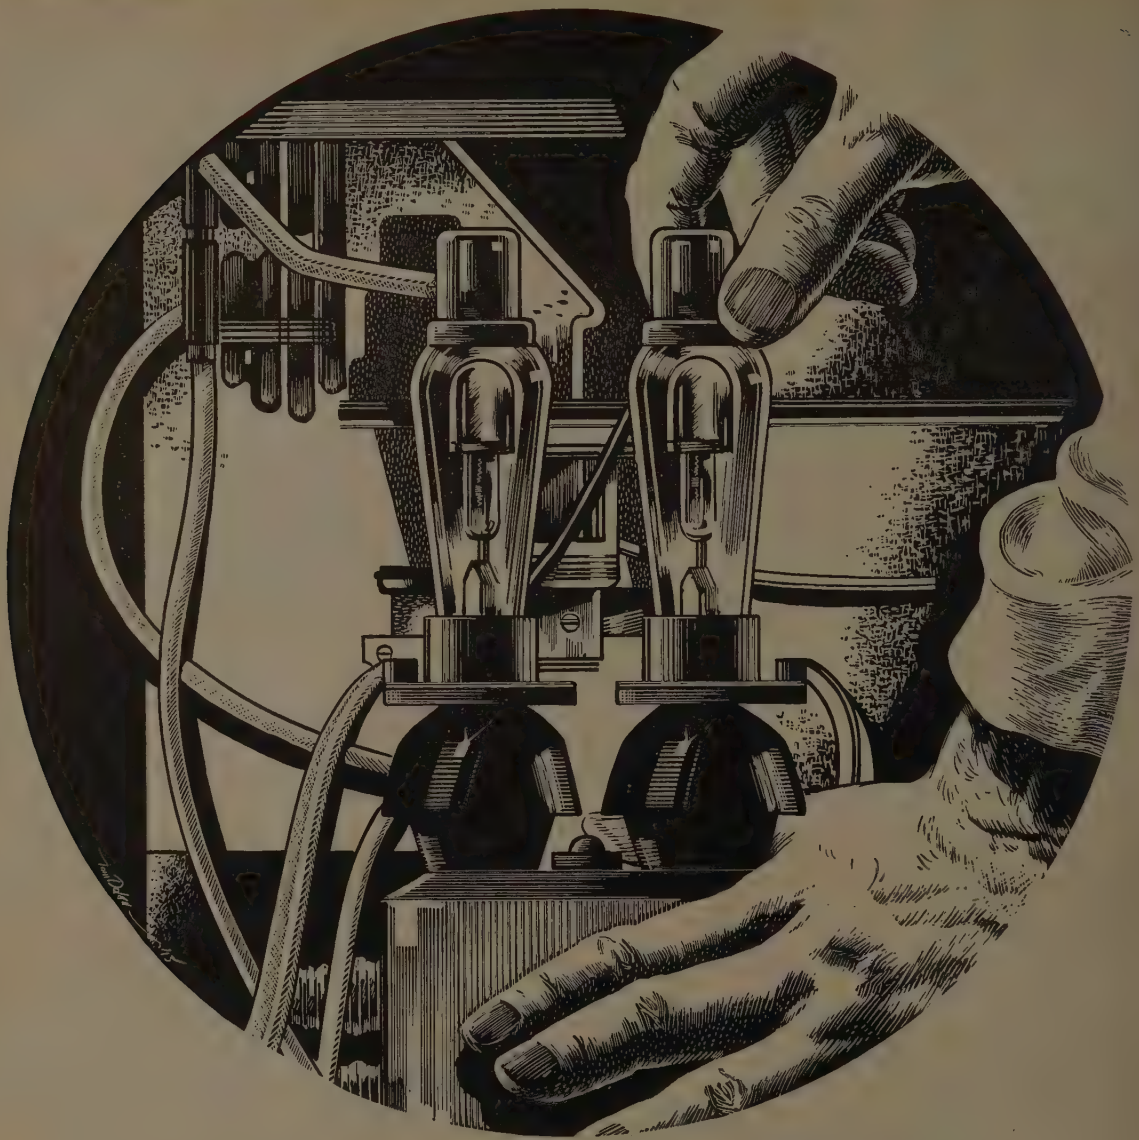

WHEN THE LAST SHOT IS FIRED!

. . . and industry resumes its peacetime production for civilian life . . . our boys will return to a better place to work . . . made possible by new uses for electronic tubes in highly efficient air-conditioning systems using the principle of electrical precipitation . . . New tube developments are almost a daily occurrence as Raytheon progresses in its wartime and postwar programs.



RAYTHEON

Raytheon Manufacturing Company

Waltham and Newton, Massachusetts

DEVOTED TO RESEARCH AND THE MANUFACTURE OF TUBES AND EQUIPMENT FOR THE NEW ERA OF ELECTRONICS

UT OF TODAY'S RESEARCH . . . TOMORROW IS ENGINEERE

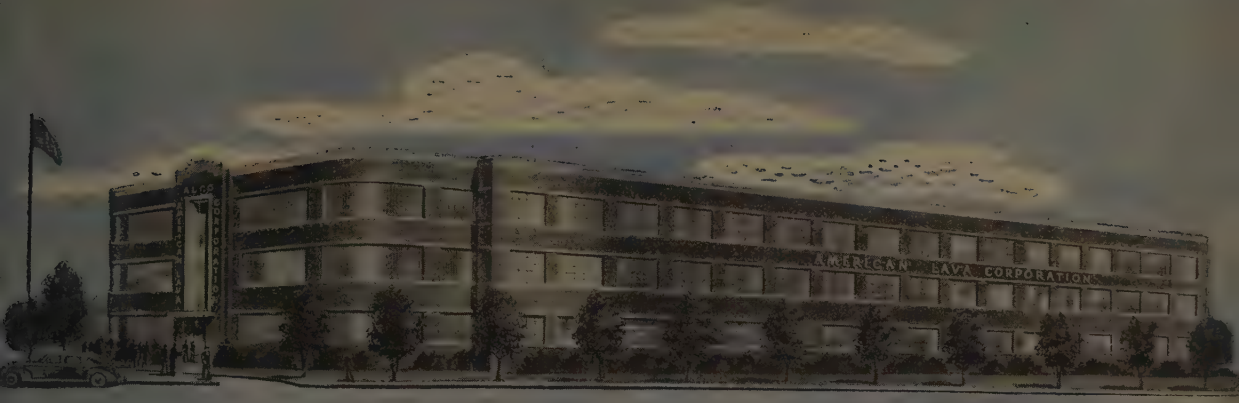

ARMY E NAVY

AWARDED JULY 27. 19

AN IMPORTANT ANNOUNCEMENT

FROM THE NATION'S LEADING PRODUCER OF STEATITE CERAMIC INSULATORS

DUE TO TREMENDOUS EXPANSION IN CAPACITY AND PLENTIFUL RAW MATERIALS...THE STEATITE CERAMIC INDUSTRY CAN SUPPLY STEATITE INSULATION FOR ALL NEEDS.

THE TRADE CAN RELY ON STEATITE

SUBSTITUTE MATERIALS ARE NOT NEEDED

AlSiMag

TRADE MARK REGISTERED U. S. PATENT OFFICE

STEATITE CERAMIC INSULATIO

AMERICAN LAVA CORPORATION

BLAZING THE

HOW ELECTRONIC TELEVISION WAS CREATED BY RCA LABORATORIES . . . HISTORIC STEPS IN THE EVOLUTION OF THIS NEW SCIENCE

BACK IN 1929 a modest man with a quiet voice calmly announced two inventions . . . two amazing almost magic devices that made it possible for radio to "see" as well as to "hear."

This man was Dr. V. K. Zworykin of RCA Laboratories. And his research in electronics gave radio its electronic "eyes" known as the Iconoscope and the Kinescope. The former is the radio "eye" behind the camera lens; the latter is the receiver's screen.

Since that red-letter day in television history, ceaseless research in the science of radio and electron optics has established RCA Laboratories as the guiding light of television.

The decade of the thirties saw television's coming-of-age. It brought new scientific instruments and discoveries; it developed new techniques of showmanship; it even created new words—televise, telecast, teleview, and telegenic.

In the evolution of television there have been "high spots"; historic milestones of progress; definite "firsts"—made possible by the services of RCA.

1928—1932—FROM THE FIRST EXPERIMENTAL STATION TO ALL-ELECTRONIC TELEVISION

Station W2XBS, New York, was licensed to RCA in 1928 to conduct television experiments. Transmitter located at laboratory in Van Courtlandt Park, was later moved to Photophone Building, 411 Fifth Avenue; then to New Amsterdam Theatre until 1931, when operations were transferred to Empire State Building.

On Jan. 16, 1930, Television pictures were transmitted by RCA from W2XBS at 411 Fifth Avenue and shown on 6-foot screen at RKO-Proctor's 59th Street Theatre, New York.

Television station W2XBS, operated by National Broadcasting Company, atop New Amsterdam Theatre, New York, opened for tests July 7, 1930, with the images whirled into space by a mechanical scanner.

Empire State Building, the world's loftiest skyscraper, was selected by RCA as the transmitter and aerial site for ultra-short-wave television experiments using both mechanical and electrical scanners. Operation began October 30, 1931.

Field tests of 240-line, all-electronic television were made by RCA at Camden, N. J., with television signals relayed by radio from New York through Mt. Arney, N. J., for the first time, May 25, 1932.

1936—OUTDOOR TELEVISION

Television outdoors was demonstrated by RCA at Camden, N. J., on April 24, 1936, with local firemen participating in the program broadcast on the 6-meter wave.

All-electronic television field tests of RCA began June 29, 1936, from ultra-short-wave transmitter in Empire State Building and aerial on the pinnacle releasing 343-line pictures.

Radio manufacturers saw television demonstrated by RCA on July 7, 1936, with radio artists and films used to entertain.

1937—ELECTRON "GUN"

Electron projection "gun" of RCA was demonstrated on May 12, 1937, to Institute of Radio Engineers, with pictures projected on 8 x 10-foot screen.

Television on 3 x 4-foot screen was demonstrated by RCA to Society of Motion Picture Engineers on October 14, 1937; pictures were transmitted from Empire State Building to Radio City.

Mobile television vans operated by RCA-NBC appeared on the streets of New York for first time, December 12, 1937.

1938—BROADWAY PLAY TELEVISED

Scenes from a current Broadway play, "Susan and God," starring Gertrude Lawrence, were telecast on June 7, 1938, from NBC studios at Radio City.

RCA announced on October 20, 1938, that public television program service would be inaugurated and commercial receiving sets offered to the public in April, 1939.

1939—BASEBALL—KING GEORGE VI—FOOTBALL

Opening ceremonies of the New York World's Fair televised by NBC on April 30, 1939, included President Roosevelt as first Chief Executive to be seen by television.

"A first from the diamond." Columbia vs. Princeton, May 17, 1939, televised by NBC.

TELEVISION TRAIL

Improved television "eye" named the "Orthicon," introduced by RCA on June 8, 1939, added greater clarity and depth to the picture.

Television spectators in New York area on June 10, 1939, saw King George VI and Queen Elizabeth at the World's Fair, telecast by NBC.

Brooklyn Dodgers-Cincinnati game telecast by NBC on August 26, 1939, was the first major-league baseball game seen on the air.

First college football game—Fordham-Waynesburg—televised by NBC, September 30, 1939.

Television from NBC station in New York was picked up by RCA receiver in plane 20,000 feet over Washington, D. C., 200 miles away, October 17, 1939.

Television cameras of NBC scanned the scene in front of Capitol Theatre and in lobby at premiere of motion picture "Gone With The Wind," December 19, 1939.

1940—HOCKEY—COLOR—TRACK BIRD'S-EYE TELEVISION

Color television was demonstrated on February 6, 1940, to Federal Communications Commission by RCA at Camden, N. J.

First hockey game was televised by NBC camera in Madison Square Garden, February 25, 1940.

Basketball: Pittsburgh-Fordham, also NYU-Georgetown at Madison Square Garden were televised by NBC, February 28, 1940, as first basketball games seen on the air.

First Intercollegiate track meet at Madison Square Garden telecast on March 2, 1940.

Using RCA's new, compact and portable television transmitter, a panoramic view of New York was televised for the first time from an airplane on March 6, 1940. Television sightseers as far away as Schenectady saw the bird's-eye view of the metropolis.

Premiere of television opera on March 10, 1940, featured Metropolitan Opera stars in tabloid version of "Pagliacci."

First telecast of religious services on March 24, 1940, from NBC Radio City studios, were seen as far away as Lake Placid.

Ringling Brothers-Barnum and Bailey circus viewed on the air, April 25, 1940, through NBC electric camera in Madison Square Garden.

Television pictures on 4½ x 6-foot screen were demonstrated at RCA annual stockholders meeting May 7, 1940, at Radio City.

Republican National Convention was televised on June 24, 1940, through NBC's New York station via coaxial cable from Philadelphia.

Democratic National Convention films rushed by plane from Chicago for NBC were telecast in New York, July 15, 1940.

President Roosevelt was seen by television throughout the Metropolitan areas as he addressed Democratic rally, October 28, 1940, at Madison Square Garden.

Election returns on November 5, 1940, televised for first time by NBC, showed teletypes of press associations reporting the news.

1941—COMMERCIAL TELEVISION

Television progress demonstrated to FCC on January 24, 1941, included: home-television receiver with 13½ x 18-inch translucent screen; television pictures 15 x 20 feet on New Yorker Theatre screen; pictures relayed by radio from Camp Upton, Long Island, to New York; also facsimile multiplexed with frequency modulation sound broadcast.

Television pictures in color were first put on the air by NBC from Empire State Building Transmitter on February 20, 1941.

Large-screen television featuring Overlin-Soose prize fight on May 9, 1941, at Madison Square Garden was demonstrated by RCA at New Yorker Theatre; also, on following days, baseball games from Ebbets Field, Brooklyn.

Commercial operation of television began July 1, 1941, on a minimum schedule of 15 hours a week. NBC's station WNBT, New York, the first commercially licensed transmitter to go on the air, issued the first television rate card for advertisers, and instituted commercial service with four commercial sponsors.

Entry of the United States in World War II, enlisted NBC television in New York to aid in illustrating civilian defense in air-raid instructions in the New York area.

1943—AMERICA AT WAR!

Today RCA Laboratories, pioneer in the science of electronics, is devoting all its efforts to the war.

Yet, from the discoveries, developments and inventions made under the urgency of war, will come greater wonders for the Better Tomorrow of a peacetime world.

RADIO CORPORATION OF AMERICA

RCA BUILDING, NEW YORK

CREATOR OF ELECTRONIC TELEVISION

STEATITE . . .

★ Centralab's Steatite plant can furnish coil forms up to 5" diameter and pressed pieces to approximately 6 inches square. Centralab's engineering, laboratory and production experience in Ceramics extends back to 1930. In addition to Steatite, Centralab also produces other types of Ceramics.* Consult our engineering dept. on your Ceramic problems.

*Cordierite: a low thermal expansion type of ceramic. Hy Dielectric: a ceramic suitable for capacitors and special application.

Centralab

Division of **GLOBE-UNION INC., Milwaukee**

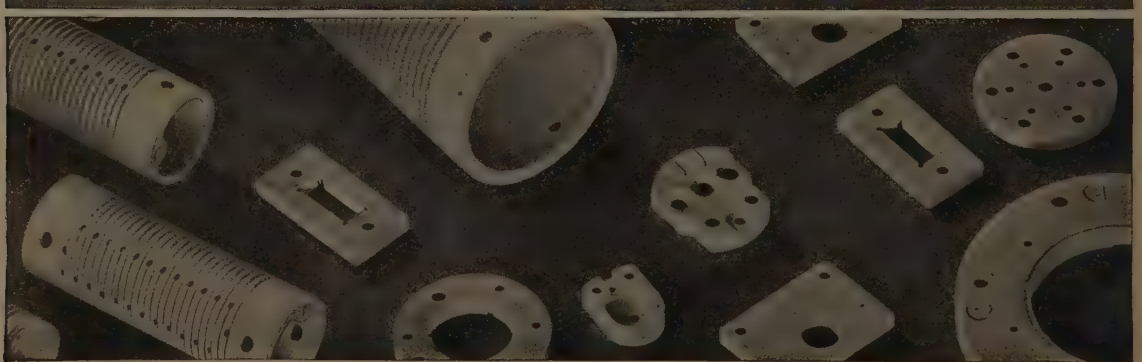

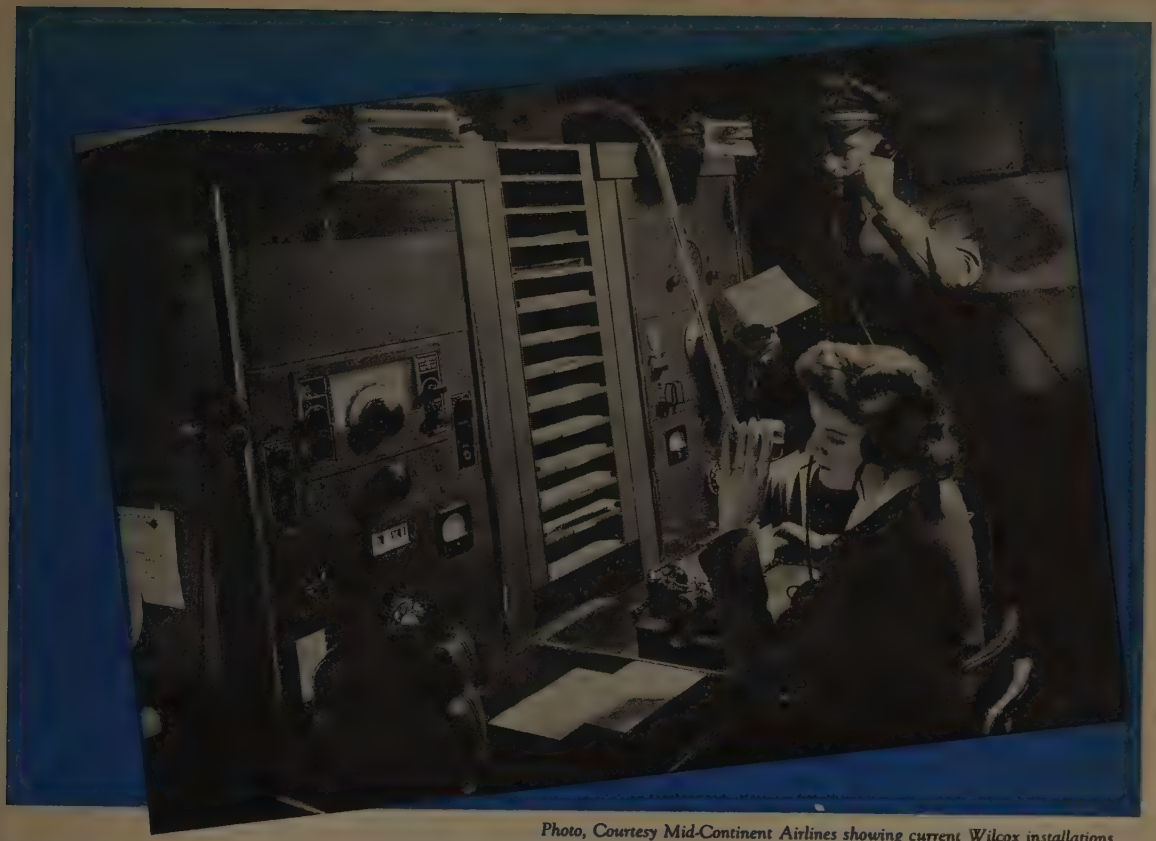

Photo, Courtesy Mid-Continent Airlines showing current Wilcox installations

Uninterrupted Service IS Vital to Safe Air Transportation

Dependable communications are the keynote. There must be no failure. For years, Wilcox has made radio equipment to help carry on flight control safely. Today, the "know-how" of Wilcox facilities is entirely devoted to manufacture for military needs. After peace is secured, the marvels of radio development will be working for better living.

There MUST Be Dependable Communications

Communication Receivers Aircraft Radio

Transmitting Equipment Airline Radio Equipment

WILCOX ELECTRIC COMPANY

Quality Manufacturing of Radio Equipment

14TH & CHESTNUT KANSAS CITY, MISSOURI

DO THINGS BETTER, FASTER, MORE ACCURATELY—*THE ELECTRONIC WAY*

TYPICAL ELECTRONIC JOBS DONE BY RCA TUBES

Communicating • Heating • Dehydrating
Measuring • Checking • Analyzing • Actuating
Protecting • Testing • Detecting • Matching
Controlling • Guiding • Sorting • Magnifying
Rectifying • Counting • Transforming
"Seeing" • "Feeling"

INDUCTION HEATING

...the electronic answer to many industrial problems

High on the list of Electronic developments that have seen tremendous expansion under impetus of war requirements is Induction Heating.

This Electronic method has meant important savings in time and cost on jobs ranging from case hardening, annealing, riveting, and tin-plating, to food dehydration, plywood glueing and others. It has meant better heat control and greater uniformity. It has meant simplified handling of materials to be treated—and much more.

Here, as in other phases of Electronic development, the radio tube is the "magic brain" of the process—and the fountainhead of modern tube development and production is RCA.

Made in varied lines for almost any Electronic application, RCA tubes afford a broad engineering selection of types, each with a background of proved performance that assures long life, utmost dependability, and high efficiency.

In the Electronics of the future, as in the Radio of today, RCA Tube engineering will continue to lead the way—*all the way!*

RADIO CORPORATION OF AMERICA

RCA Victor Division, Camden, N. J.

RCA TUBE PUBLICATIONS

Following are a few of the Tube publications available from RCA Commercial Engineering Section, 418 South Fifth St., Harrison, N. J.:

RCA TRANSMITTING (Power) TUBE GUIDE . . . 72 pages of data and circuits for popular RCA Power Tubes, U-H-F Acorn and Midget types, Gas-triodes, and Gas-tetrodes. Single copy, 35c.

TT-100 TRANSMITTING AND SPECIAL-PURPOSE TUBES BULLETIN . . . Illustrated catalogue information on RCA air- and water-cooled transmitting tubes, rectifiers, television tubes, voltage regulators, and special amplifiers. Single copy, no charge.

RCA PHOTOTUBE BOOKLET . . . Provides a clear understanding of theory, construction, and operation. Single copy, no charge.

RCA RADIO-ELECTRONIC TUBES

High-vacuum, gas, and vapor tubes • Voltage amplifiers • Low-power and medium-power tubes • Cathode-ray tubes • Rectifiers • Voltage regulators • Relay tubes

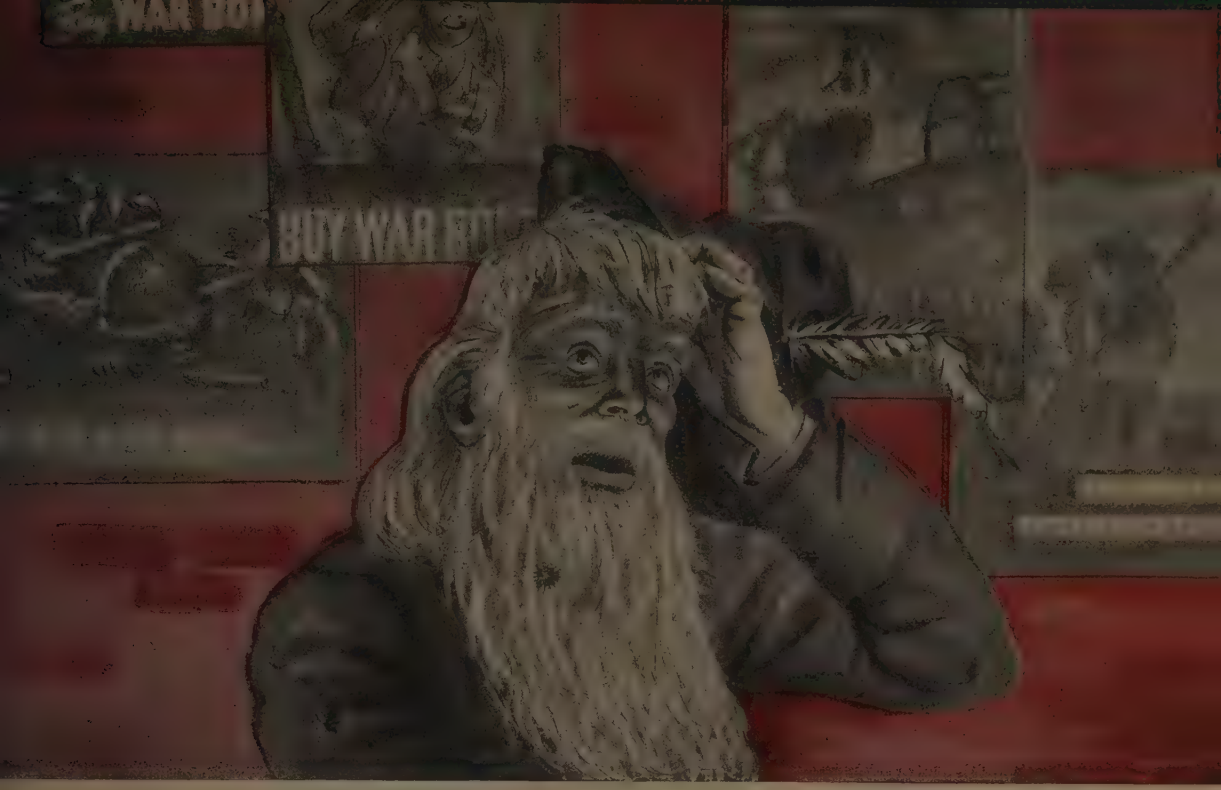

You've been sleeping a long time, Rip—

Today's dizzy pace must seem frightfully strange to you. Don't feel too badly about it though, because a lot of us are looking at it with similarly unbelieving eyes.

We were awakened from our peaceful sleep by some big-time heels who decided they were of a master race, destined to lord it over an enslaved world. We were to be the slaves.

Now look at this factory. It's one of the many thousands in this country alone, that are designing and building tools required to win the most shameful and bloodiest of all wars.

Come on, Rip, snap out of it. We're all needed. Our specific job is to continue producing the most complete line of precision attenuators in the world. There's a war job for you, too.

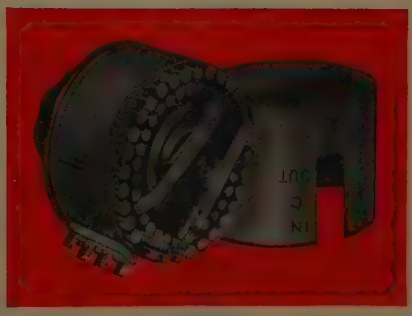

Ordering standard components and equipment may facilitate deliveries.

THE DAVEN COMPANY

158 SUMMIT STREET ● NEWARK, NEW JERSEY

NOSE TO THE GRINDSTONE

"Our noses are held to the grindstone of war production . . . but our eyes are fixed on the future." This is how one Stancor engineer described our present operating policy.

War problems are urgent, challenging, and stimulating. To solve them calls for midnight oil; but the lessons learned and discoveries made apply also to the problems of peace. When the war is won, industry will be confronted by a revolutionary development of electronic engineering . . . and Stancor engineers, seasoned by war demands, will be ready to serve you.

STANCOR

STANDARD TRANSFORMER CORPORATION
1500 NORTH HALSTED STREET · CHICAGO

E·L IS OUT THERE, TOO...

Out where the "fighting front" becomes grim reality instead of a glib phrase, E·L units are powering the "Walkie-Talkie" that serves as the voice and ears of our advance forces.

It's a marvelously efficient two-way radio, of course. But the Signal Corps knew that it couldn't be the useful, reliable instrument it is, unless it had a power supply that would keep it operating, under all conditions . . . whether in the destructive heat and grit of the desert, the paralyzing arctic cold, or the corroding humidity of the jungle.

Such a power supply did not exist until Electronic's engineers designed a special, high-voltage vibrator power supply, combined with storage battery, in a single, incredibly light and compact unit.

Behind this and other E·L power supply achievements are years of intensive development of the technique of *vibrator type* power supplies, and the most extensive research anywhere on power supply circuits. They have not only produced amazing advances for many military purposes, but promise revolutionary benefits for products of peace.

Wherever electric current must be changed, in voltage, frequency or type—for war or peace—E·L Vibrator Converters will give the same outstanding service that has singled them out for battle duty today.

Power Supply using rechargeable, non-spill storage battery for operation of "Walkie-Talkie" radio equipment. Input Voltage: 4 Volts; Output: Numerous Voltages, supplying plate and filament requirements of the equipment. Width, 3½"; Length, 6½"; Height, 4⅜".

. . . AND E·L WILL BE HERE WHEN PEACE COMES!



● Mobile, two-way radio telephones will be at work in peace-time on big construction projects . . . on farms . . . in countless other places. E·L products will be on the job then, too, solving the power supply problem!

Electronic LABORATORIES, INC.

E·L ELECTRICAL PRODUCTS—Vibrator Power Supplies for Communications . . . Lighting . . . Electric Motor Operation . . . Electric, Electronic and other Equipment . . . on Land, Sea or in the Air.

INDIANAPOLIS

"Just getting the wire laid was a tough problem. Keeping it intact in bombings, shellings and adverse weather is a twenty-four-hour proposition. . . . Wire repair crews are made up of four men. Three stand guard while the other works."
(From story by Sgt. James W. Hurlbut, Marine Corps Combat Correspondent)

Telephone Exchange on Guadalcanal

Marine communications men built it under fire. And it has been kept built. The "Guadalcanal Tel & Tel" covers well over a thousand miles of wire.

That is where some of your telephone material went. It's fighting on other fronts, too. We're getting along with less here so they can have more over there.

Telephone lines are life-lines and production lines in a war. Thanks for helping to keep the Long Distance wires open for vital calls to war-busy centers.

WAR CALLS COME FIRST

BELL TELEPHONE SYSTEM

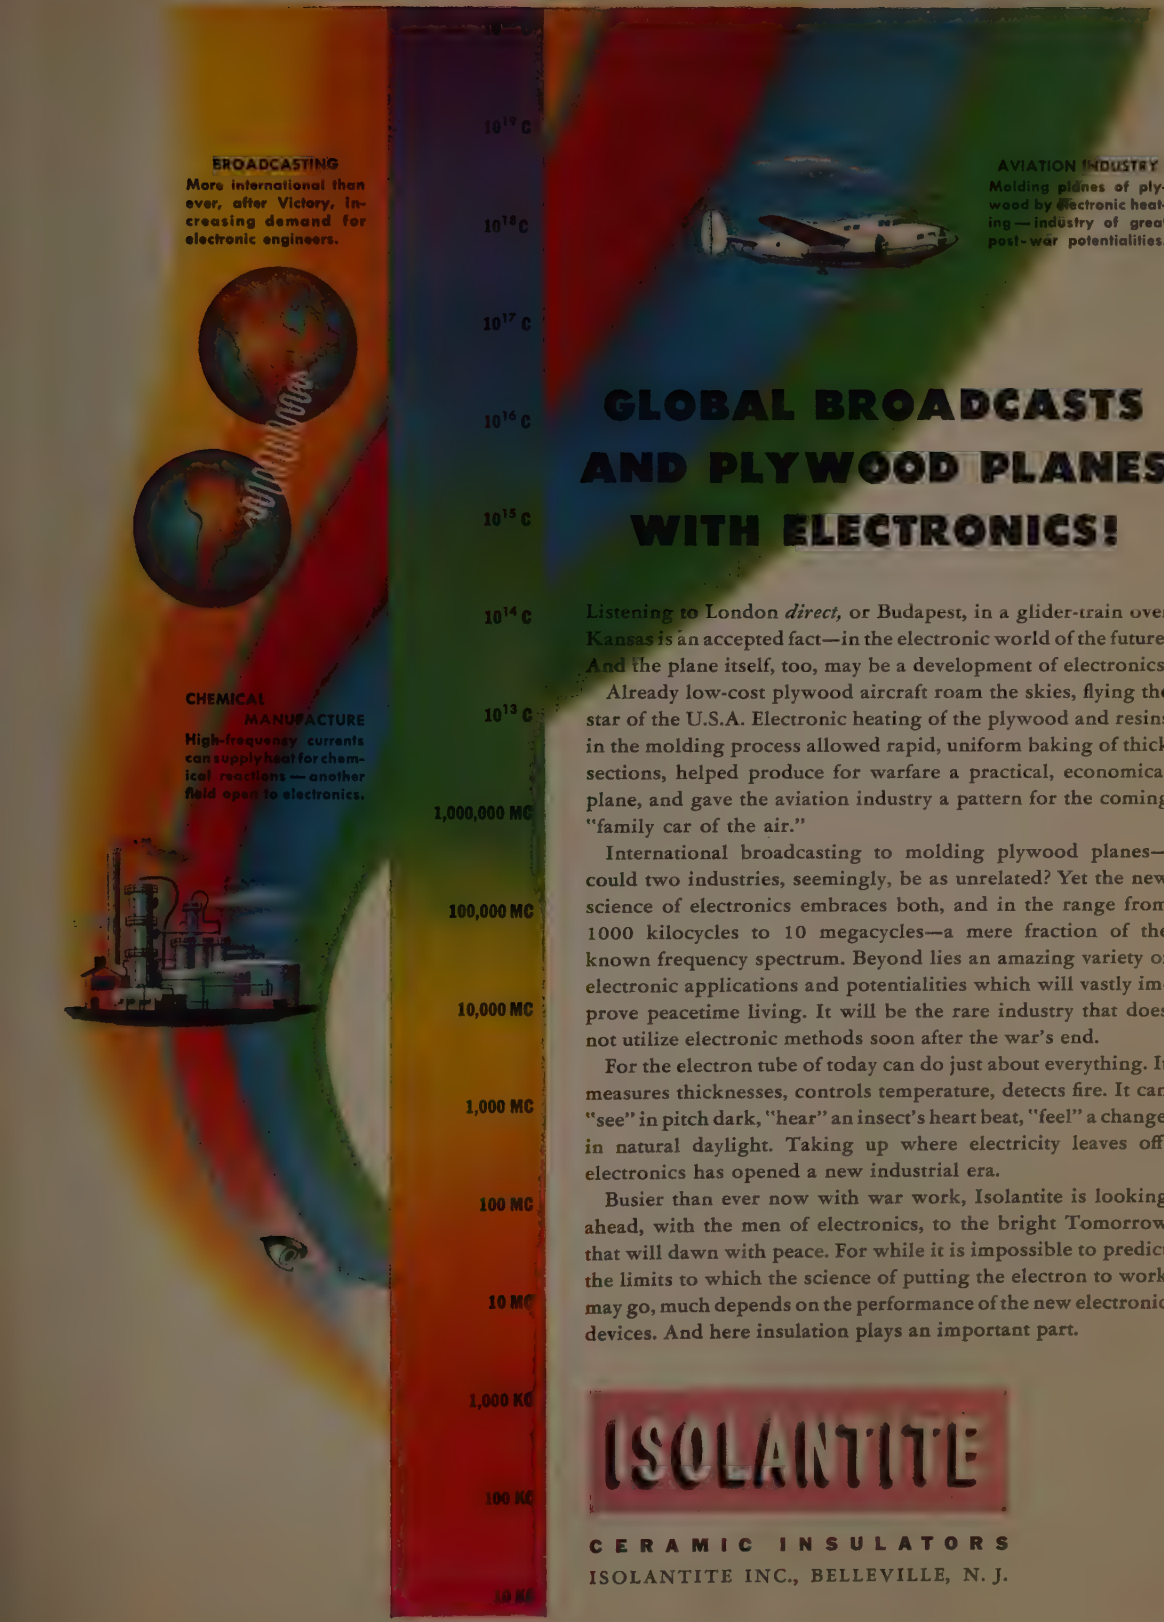

GLOBAL BROADCASTS AND PLYWOOD PLANES WITH ELECTRONICS!

Listening to London *direct,* or Budapest, in a glider-train over Kansas is an accepted fact—in the electronic world of the future. And the plane itself, too, may be a development of electronics.

Already low-cost plywood aircraft roam the skies, flying the star of the U.S.A. Electronic heating of the plywood and resins in the molding process allowed rapid, uniform baking of thick sections, helped produce for warfare a practical, economical plane, and gave the aviation industry a pattern for the coming "family car of the air."

International broadcasting to molding plywood planes—could two industries, seemingly, be as unrelated? Yet the new science of electronics embraces both, and in the range from 1000 kilocycles to 10 megacycles—a mere fraction of the known frequency spectrum. Beyond lies an amazing variety of electronic applications and potentialities which will vastly improve peacetime living. It will be the rare industry that does not utilize electronic methods soon after the war's end.

For the electron tube of today can do just about everything. It measures thicknesses, controls temperature, detects fire. It can "see" in pitch dark, "hear" an insect's heart beat, "feel" a change in natural daylight. Taking up where electricity leaves off, electronics has opened a new industrial era.

Busier than ever now with war work, Isolantite is looking ahead, with the men of electronics, to the bright Tomorrow that will dawn with peace. For while it is impossible to predict the limits to which the science of putting the electron to work may go, much depends on the performance of the new electronic devices. And here insulation plays an important part.

ISOLANTITE

CERAMIC INSULATORS

ISOLANTITE INC., BELLEVILLE, N. J.

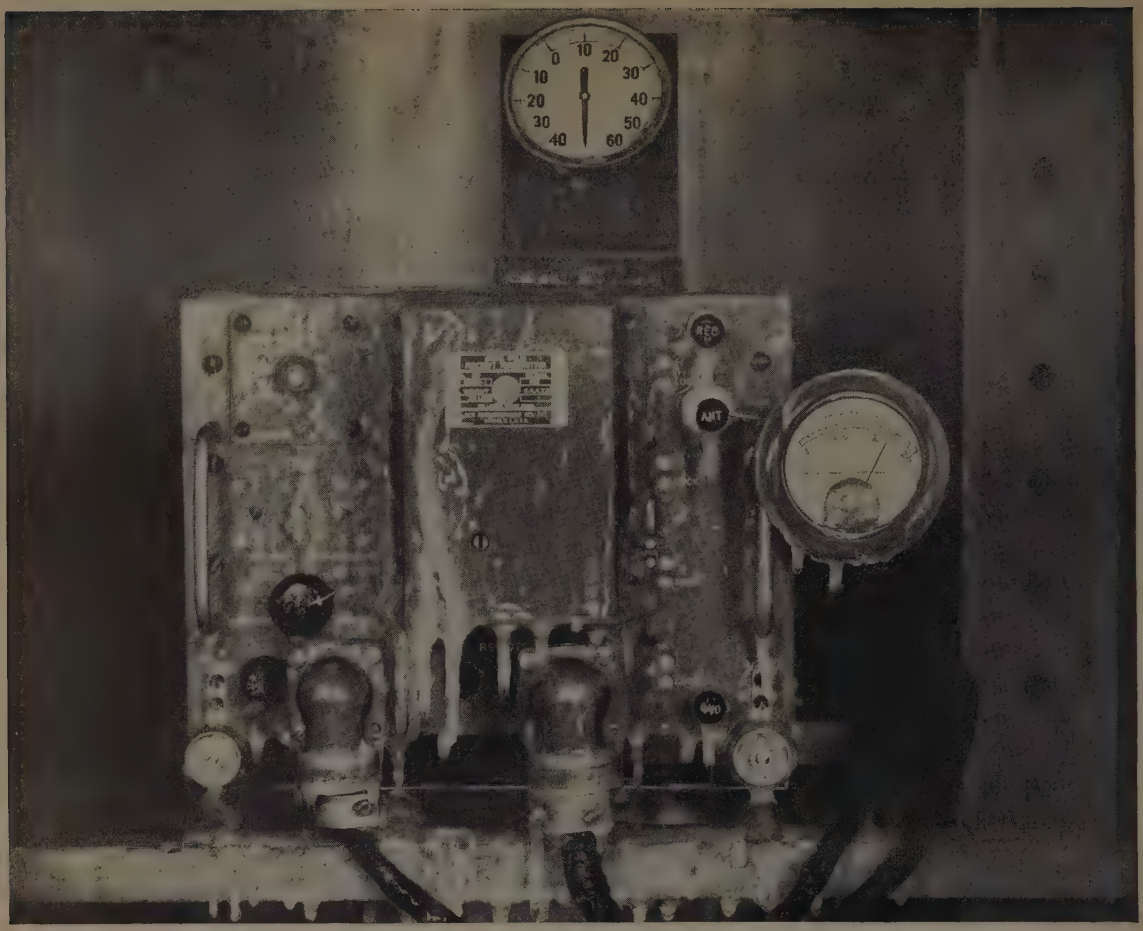

ARCTIC REHEARSAL...AT 76° BELOW

Today's demands on men and planes and equipment are the most severe the world has ever known. Battlegrounds have advanced into the sub-stratosphere—where even over the equator temperatures are scores of degrees below zero.

No radio equipment could remain operative under such conditions until scientific research solved the problems of tuning controls freezing, sensitive relays jamming, electrical adjustments changing and wires snapping. Without research, radio and electronic systems fail in these frigid temperatures where our men and planes are fighting in their conquest over cold and altitude and the enemy.

To permit accurate scientific investigation of these problems, RCA recreates this intense cold in its laboratories, cold that is 9° lower than the stratosphere temperature, cold that equipment such as the ice-sheathed transmitter shown above must withstand for endless hours. In these icy chambers RCA engineers are looking ahead to the future, solving the problems that will be encountered as our fighters and bombers operate higher and higher into the stratosphere.

Daily these engineers patiently work, subjecting equipment to temperatures as low as —76°, testing and retesting until operation is satisfactory—until dependability is assured. Thus RCA research helps to make our aviation radio equipment more efficient, more powerful, and more reliable in performing its vital tasks.

That's one reason, too, experts say: "For results in aviation radio performance, consult RCA research."

RCA

RCA AVIATION RADIO

RCA Victor Division • **RADIO CORPORATION OF AMERICA** • Camden, N. J.

IT'S THE NUT THAT LICKS FASTENING PROBLEMS

THINK of the tough jobs for nuts on planes, tanks, guns, naval vessels and production equipment.

And it's in these jobs you'll find Elastic Stop Nuts.

In fact, you'll find more of them than all other lock nuts combined.

The reason is, these nuts stay put.

Once on, they're set – don't shake loose even under severe vibration. And you can take them off and put them on many times and they won't lose their locking ability.

When peace returns, they're going to solve all kinds of manufacturing problems. They're going to relieve maintenance engineers of frequent inspections and *save time and money in replacements.*

Our engineers have been solving fastening problems for years – the stickers of both peace and war.

Whenever you have a fastening detail to be met, feel free to call upon us. We'll gladly share our experience and recommend the right Elastic Stop Nut.

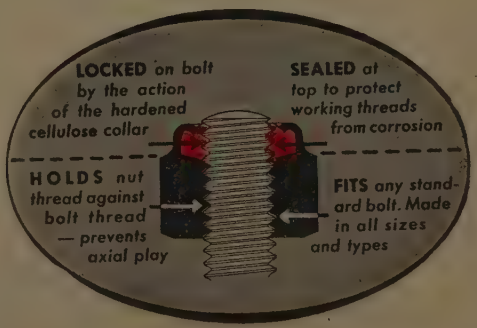
LOCKED on bolt by the action of the hardened cellulose collar
SEALED at top to protect working threads from corrosion
HOLDS nut thread against bolt thread — prevents axial play
FITS any standard bolt. Made in all sizes and types

ELASTIC STOP NUTS

Lock fast to make things last

ELASTIC STOP NUT CORPORATION OF AMERICA
UNION, NEW JERSEY

ESNA TRADE MARK



LEADERSHIP
is just a word!

but

THORDARSON'S LEADERSHIP
IS AN ACCEPTED fact!

Today, in any language, the word Thordarson means the finest transformers that human skill can create. And, in almost every country, the leadership which Thordarson enjoys is reflected in the important services rendered by Thordarson transformers . . . services which have brought new comforts and enjoyments to peace-time, and which are helping more efficiently to consummate the jobs of war-time.

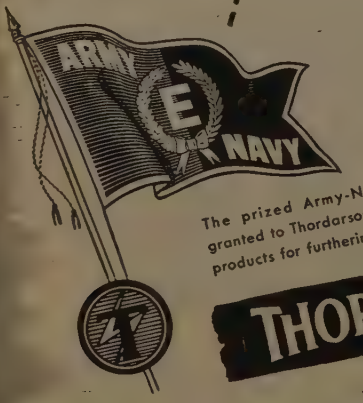

The prized Army-Navy "E" award has been granted to Thordarson for excellence in producing products for furthering the war effort.

THORDARSON

ELECTRIC MFG. COMPANY
500 WEST HURON ST., CHICAGO, ILL.

Transformer Specialists Since 1895

Army-Navy "E" Honor Roll

Solar Production Increased 1200%, Receives Army-Navy "E"

The Solar Manufacturing Corporation awarded the coveted Army-Navy "E" on April 10, 1943, has built up an outstanding record of performance since its inception. Founded in 1932, in the midst of a business depression, it has grown substantially and rapidly as a result of the fortunate combination of men. Originally, the company occupied several floors at 599 Broadway, New York City, turning out capacitors and electrical condensers principally for use in radio sets. It developed a large export business to all parts of the world.

Five years ago, the firm moved to larger quarters in its own office building and plant at Bayonne, New Jersey. A remarkable fact connected with Solar's move is that the majority of its workers went with the firm, traveling from their homes in Long Island, New York, Brooklyn, Westchester and surrounding communities. Today, after another large expansion, one-third of Solar's personnel is made up of the nucleus of New York residents who went along with the firm 5 years ago. Today Solar is turning out in one month twelve times the production it was turning out about the time of Pearl Harbor.

In the Spring of 1942 Solar opened a second large plant at West New York, N. J., to help break certain bottlenecks in production in critical industries. Organization of the new plant was rapid, and within a few months the firm was turning out units at a gratifying rate for use in the countless pieces of electrical apparatus used by our armed forces. The firm is currently readying a third large plant to open under its management in a large Mid-Western city this summer. Production here will equal the production in the Bayonne and West New York, N. J., plants combined.

The firm's personnel has always consisted of over 75 per cent women workers. Today it employes about 82 per cent women. Women have been highly satisfactory in handling most bench-work operations, assembling and stacking mica, etc. Men are employed only in the heavier jobs.

To reduce the inroads of the draft, the firm has made notable use of the specially developed talents and abilities of blind men and women, the deaf and other physically handicapped. Solar was the first firm to employ a blind woman after Pearl Harbor, and so successful was the experiment that today the firm employs more than a dozen totally blind workers as mica gaugers. Their highly developed sense of touch and dexterity enables them to gauge the thickness of tiny sheets of mica more quickly and efficiently than this operation was formerly done mechanically. The blind

(Continued on page xxxviii)

DESIGN ENGINEERS CAN YOU USE A RESISTANCE MATERIAL IN WHICH I varies as E^4?

THYRITE

MAY BE THE ANSWER TO SOME OF YOUR CIRCUIT PROBLEMS

THYRITE* is a silicon-carbide ceramic material, dense and mechanically strong, having nonlinear resistance characteristics—the resistance varying as a power of the applied voltage. Its resistance characteristic is stable, and substantially independent of polarity or frequency. Thyrite has been used for many years in many important applications, including electronic. Thyrite can be produced in various shapes and sizes (those which can be successfully molded).

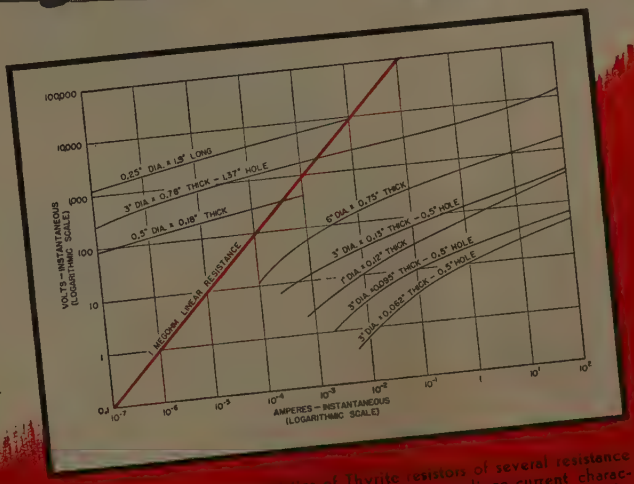

Typical volt-ampere characteristics of Thyrite resistors of several resistance levels and power ratings. Note that the nonlinear voltage-current characteristic extends over an extremely wide current range. Compare it with the characteristic (orange line) of a 1-megohm linear resistor.

The nearest G-E office can tell you what data should be submitted as a basis for a quotation. Or write direct to General Electric, Section 16-250, Pittsfield, Mass.

Here are some of its MANY APPLICATIONS

- For protective purposes (to limit voltage surges)
- As a stabilizing influence on circuits supplied by rectifiers
- As a potentiometer (The division of voltage can be made substantially independent of load current)
- For the control of voltage-selective circuits, either independent of or in combination with electronic devices

*Reg. U.S. Pat. Off.

GENERAL ELECTRIC

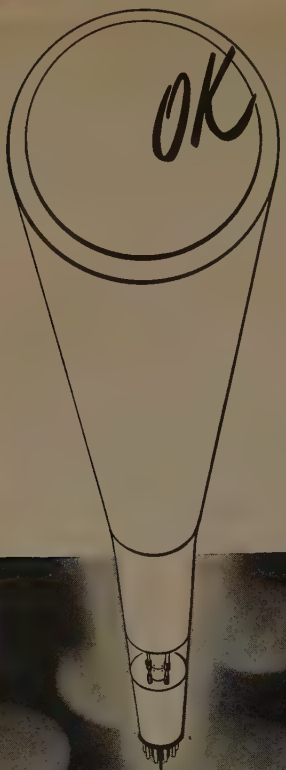

FOR THE BIGGEST JOB IN THE WORLD!

WHETHER it's a simple strand of wire or a cathode ray tube, we at Philips have only one standard that merits the O. K. of our electronics engineering experts. That standard is perfection.

Today, our O.K.'s contribute towards the biggest job in the world. Today, Victory is our primary and exclusive concern.

Manufacturers for Victory—Cathode Ray Tubes; Amplifier Tubes; Rectifier Tubes; Transmitting Tubes; Electronic Test Equipment; Oscillator Plates; Tungsten and Molybdenum in powder, rod, wire and sheet form; Tungsten Alloys; Fine Wire of all drawable metals: bare, plated and enameled; Diamond Dies.

X-Ray Apparatus for industrial, research and medical applications. (Philips Metalix Corporation.)

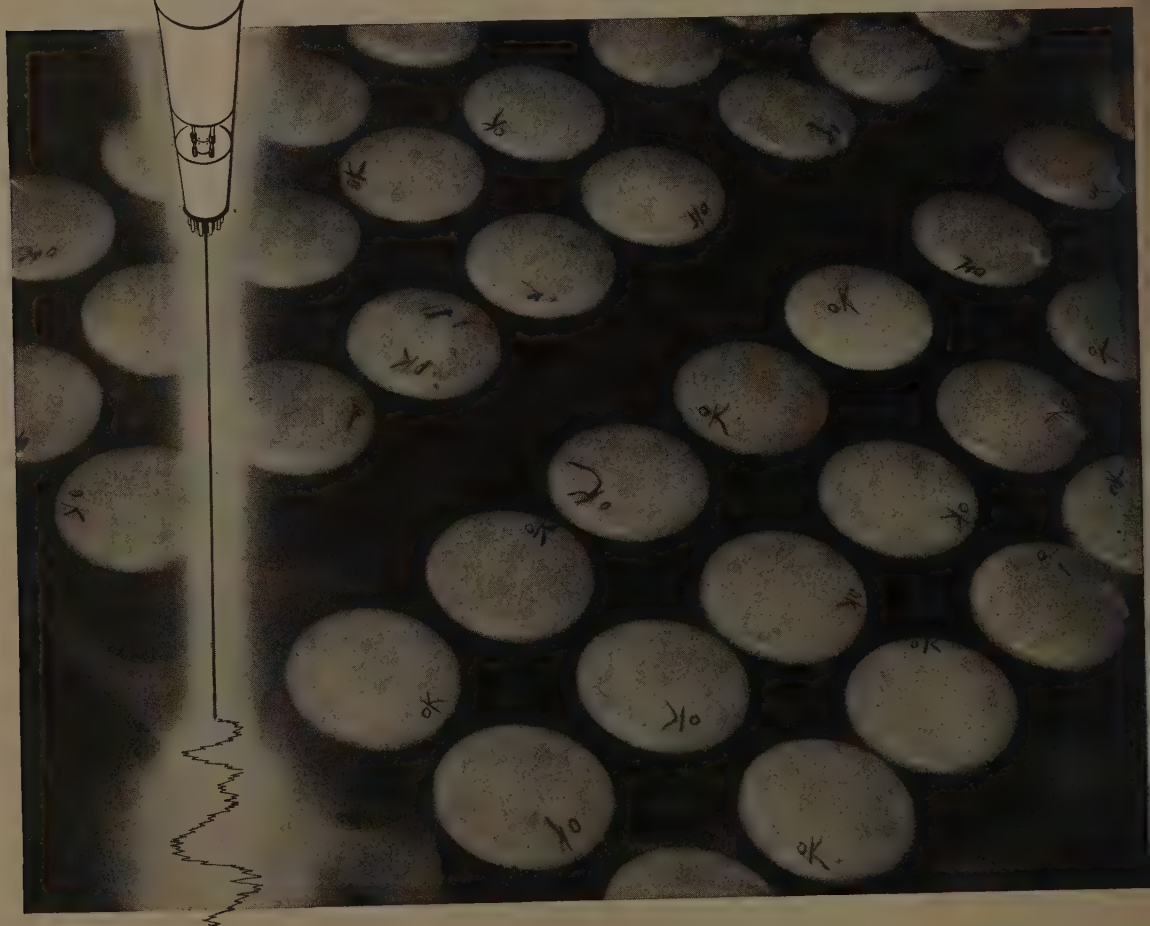

NORTH AMERICAN PHILIPS COMPANY, INC.

Electronic Research and Development

Factories in Dobbs Ferry, N.Y.; Mount Vernon, N.Y. (Philips Metalix Corp.); Lewiston, Maine (Elmet Division)

AMERTRAN helped Marconi
send his first message across the Atlantic!

ONE of Marconi's headaches in the earlier development of long distance wireless communication was the lack of suitable transformers. It is, therefore, significant that he chose transformers manufactured by the AMERICAN TRANSFORMER COMPANY for the Nova Scotia station that sent his famous first message. Then only one year old, this Company had already acquired a reputation for solving the most difficult transformer problems. This is only one of the many historic applications of electric power in which AMERTRAN has been a participant.

Today, startling improvements are being incorporated in our products as a result of field reports of war service from the poles to the tropics. Many years of experience are being compressed into a few months. Details regarding these new economies, new characteristics, higher efficiencies with war-born ruggedness and ease of installation, will be revealed when peace comes. Meanwhile, the full production of our factories is being devoted to the war effort.

AMERICAN
TRANSFORMER COMPANY
178 EMMET STREET • NEWARK, N. J.

AMERTRAN

PIONEER MANUFACTURER OF
TRANSFORMERS, REACTORS AND RECTIFIERS
FOR ELECTRONICS AND POWER TRANSMISSION

ARMY
E
NAVY
SHURE
FOR OUTSTANDING ACHIEVEMENT
IN MICROPHONE PRODUCTION
AND ENGINEERING
The Army and Navy "E," symbol of outstanding achievement, has been awarded to Shure Brothers. It is the highest badge of honor for the victories of the soldiers on the production front that must come before the victories of the soldiers at the fighting fronts. Shure Brothers are united in the determination to do their utmost to hasten the day of final victory for the democratic forces.
SHURE BROTHERS • 225 WEST HURON STREET, CHICAGO

Throwing Rocks at the Axis
In cutting quartz down into wafer-thin fighting Xtals the DX Crystal Company is pacing the industry. Speed, precision and dependability are prime watchwords of those who help make these vital parts.
BUY MORE BONDS!
DX CRYSTAL CO.
GENERAL OFFICES: 1841 W. CARROLL AVE., CHICAGO, ILL., U.S.A.
DX
XTALS
'the heart of a good transmitter'
TRADE MARK

Army-Navy "E" Honor Roll

(Continued from page xxxiv)

workers being guided about the streets of West New York by their "Seeing Eye" dogs are a familiar sight to the townspeople.

The great powers of concentration of the deaf have proven valuable to the firm in all operations where the large number of deaf men and women are employed. Excellent results have also been secured in the cases where elderly men and women, formerly considered unemployable, are now working.

In awarding the Army-Navy "E" to Solar, the principal speakers, Brigadier-General A. A. Farmer, head of the Philadelphia Signal Corps Procurement District, and Rear-Admiral H. L. Brinser, Inspector of Naval Material, 3rd Naval District, New York City, praised management and labor for their complete understanding and spirit of cooperation. The impressive ceremonies were held in the grand ballroom of the Waldorf-Astoria Hotel in New York City on the evening of Saturday, April 10, 1943, before the 2,000 employees and their 2,000 guests. A unique feature of the ceremonies was the description of first-hand knowledge of the importance of electrical condensers by radio man Staff-Sergeant William J. Caldwell, just returned from Guadalcanal. His flying fortress, the "Goonie Bird," has a gallant record, and the young soldier is recovering from wounds sustained in service. He participated in the ceremonies by presenting silver "E" pins to the employees.

Two Philco Divisions win White stars

The Storage Battery Division of Philco Corporation was awarded a white star for continued excellence of its war production on April 6th. The original Army-Navy "E" flag was awarded October 7, 1942.

The Chicago Division was awarded a white star April 28. This plant won its Army-Navy "E" flag November 5. Over 90 per cent of the employees at the Chicago plant are women.

Remler Wins Army-Navy White Star Award

For maintaining its high production record for six months after winning the Army-Navy "E," Remler Company, Ltd., San Francisco, has been awarded a white star, according to E. G. Danielson, president of the company.

Hallicrafters Again Receives Production Merit Award!

The Hallicrafters Company, Chicago who were awarded their Army-Navy "E" Burgee on September 9, 1942 have again been cited for continued excellence in the production of communications equipment by the addition of stars to their Army-Navy "E" Burgee.

This coveted award was accepted for the Hallicrafters Company by W. J. Halligan and R. W. Durst.

(Continued on page liii)

LOOK FOR THE ANTENNA

Radio equipment has become the symbol of the modern instrument of war. The fast action, quick decisions and perfect coordination of todays war of movement demands perfect communications, and radio provides communication "on the move."

We are proud of the part that National Radio Equipment is playing.

NATIONAL COMPANY, INC., MALDEN, MASS.

SKILL

To Meet Your Specifications

PERFORMANCE is the real measure of success in winning the war, just as it will be in the post-war world. New and better ideas—production economies—speed—all depend upon inherent **skill and high precision** . . . For many years our flexible organization has taken pride in doing a good job for purchasers of small motors. And we can help in creating and designing, when such service is needed. Please make a note of Alliance and get in touch with us.

ALLIANCE DYNAMOTORS

Built with greatest precision and "know how" for ***low ripple—high efficiency—low drain*** and ***a minimum of commutation transients.*** High production here retains to the highest degree all the "criticals" which are so important in airborne power sources.

ALLIANCE D. C. MOTORS

Incorporate precision tolerances throughout. Light weight—high efficiency—compactness. An achievement in small size and in power-to-weight ratio. Careful attention has been given to distribution of losses as well as their reduction to a minimum.

Remember Alliance!
—YOUR ALLY IN WAR AS IN PEACE

ALLIANCE
MANUFACTURING CO.
ALLIANCE . OHIO

Current Literature

The following books have been received by the Institute and submitted for review.

*APPLIED ELECTRONICS. By the Members of the Staff of the Department of Electrical Engineering, Massachusetts Institute of Technology • • • *John Wiley & Sons, Inc., 440 Fourth Ave., New York, N. Y.* (738 pages+xxiii, cloth bound, 6×9¼ inches, 342 figures.) Described as a first course in Electronics, Electron Tubes, and Associated Circuits, this book is one of the series of texts prepared by the M.I.T. staff as a revision of the entire presentation of basic technological principles of electrical engineering. To quote from the Foreword by Dr. Karl T. Compton, the book "should appeal to the student of ordinary preparation and also provide a depth and rigor challenging to the exceptional student and acceptable to the advanced scholar. It should comprise a basic course adequate for all students of electrical engineering regardless of their ultimate specialty. Restricted to material which is of fundamental importance to all branches of electrical engineering, the course should lead naturally into any one branch." Price $6.50.

*LABORATORY MANUAL IN RADIO. By Francis E. Almstead, Kirke E. Davis and George K. Stone • • • *McGraw-Hill Book Company, Inc., 330 W. 42nd Street, New York, N. Y.* (139 pages+vii, size 6×9 inches, paper covered, 50 figures.) This manual the authors state, is adapted for use with any elementary textbook in radio. The experiments are grouped under the broad topics found in all textbooks rather than as separate disconnected exercises. The book is particularly designed for high-school students in beginning classes and naval recruits. Price $.80.

Booklets

General Electric Issues New Bulletin on Power Package for Aircraft

The G-E power package for aircraft is described in a new, illustrated 4-page bulletin (GEA-3968) recently issued by the *General Electric Company, Schenectady, N. Y.* The bulletin illustrates and describes the three types in which the compact power package is furnished and explains the use for which each type is desirable.

The bulletin also describes in detail the unusual number of functions incorporated in each power package—motor, brake, gears, clutch, limit switch, and load release.

"TIPS ON MAKING TRANSMITTING TUBES LAST LONGER" is the title of a new booklet just issued by the *RCA Tube and Equipment Department.* The booklet is designed as an aid to all users of electronic tubes in the industrial field as

(Continued on page xlvi)

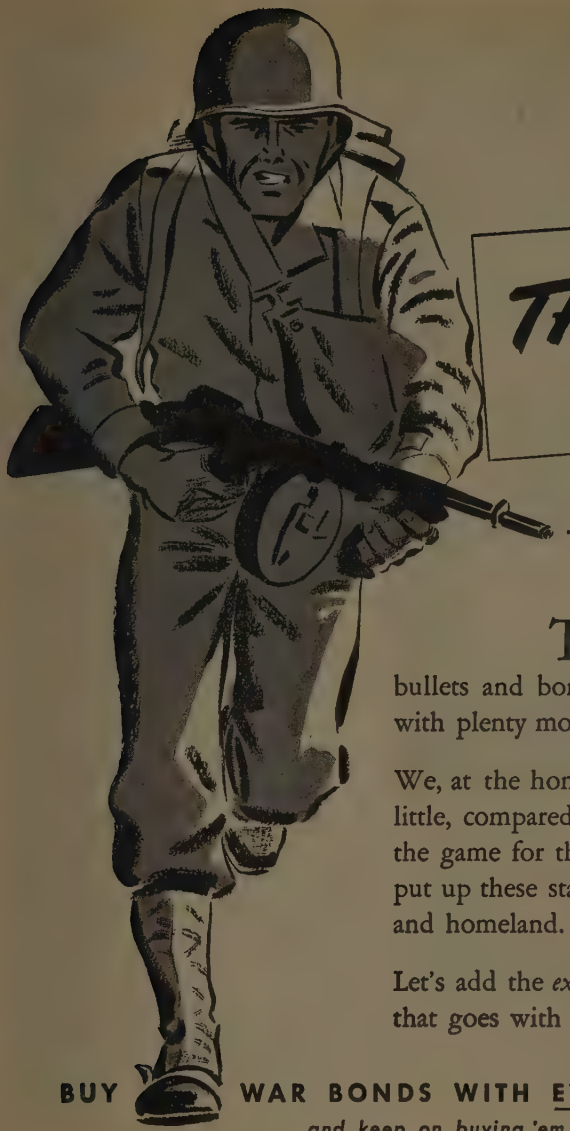

THEY ASKED FOR IT!

THEY CHALLENGED America's brains, brawn, bullets and bombs . . . now they're getting all *four* in *big doses,* with plenty more to come!

We, at the home producing end of the long supply line risk little, compared with our youth on the battle fronts, playing the game for the higher stakes of life itself . . . who willingly put up these stakes *every day* to preserve our cherished freedom and homeland.

Let's add the *extra steam* to increase production, and the power that goes with it, to insure a quick, complete victory!

BUY WAR BONDS WITH EVERY UN-NEEDED DOLLAR . . .

. . . and keep on buying 'em. They're the world's safest investment.

Cathode ray tubes

Weather-proof reproducers

Amplicall inter-communicating units

Transmitting type tuning condensers

Industrial sound control units

RADIO . . . SOUND . . . **Rauland** **. . . COMMUNICATIONS**

Electroneering is our business

THE RAULAND CORPORATION . . . CHICAGO, ILLINOIS

Rauland employees are all investing 10% of their salaries in War Bonds and will continue to do so.

WE TOO, FIGHT
...FOR PEACE!
Lafayette is doing its part to win the war...and the peace that must surely follow. We play the important part of speeding the war effort by supplying emergency requirements of radio, sound and electronic parts to all branches of the armed forces as well as to manufacturers and sub-contractors. Lafayette is in there fighting to save you time by supplying all of your needs in one order—quickly!
Now it is no longer necessary to comb the field to find the various parts you need. Due to Lafayette's extensive buying facilities and large, diversified stocks, one order (no matter how large or how small) will bring quick deliveries on all of your requirements.
Free catalog—Radio, Sound and Electronic Parts—Dept. 6H3
LAFAYETTE RADIO CORP.
901 W. JACKSON BLVD., CHICAGO, ILL.
265 PEACHTREE ST., ATLANTA, GEORGIA
"Quick Deliveries on Radio, Sound and Electronic Parts"

Booklets

(Continued from page xliv)

well as among broadcasters. The tips, according to the booklet, have been proved in the most exacting applications of communications. (12 pages, illustrated, size $4\frac{3}{4}\times7\frac{1}{2}$ inches.)

Pointing up its message with the analogy of the good motor car tire that will stand up under the strain of operating at 100 miles an hour, but won't last as long, the booklet describes how radio tubes also wear out sooner when they are operated at maximum voltage capacity. It gives detailed instructions for the right method of putting tubes into operation by a slow start, explaining what happens to curtail the life of a tube when the full current is turned on at once.

Five general "good rules to follow" are listed; a chapter on how to double the life of hard-to-get tungsten filament tubes, another on six ways to make mercury-vapor rectifier tubes last longer, one on tube resting periods and one explaining why cooler tubes last longer. The final chapter explains how engineers are building longer life into transmitting tubes without raising their ratings. Single copies are available by request from *RCA Commercial Engineering Section, Harrison, N. J.*

Type U Test Set

Of special interest to telephone and other communication engineers is a newly-revised catalog which describes the well-known Type U Test Set. This sturdy, portable Wheatstone bridge is designed especially for communication purposes in measuring resistance and capacitance. It is best adapted for locating faults on telephone and telegraph cables, for identifying faulty wires in a cable, for measuring conductor resistance, for locating grounds and crosses by Murray, Varley and Hilborn loop tests, and for locating opens by capacitance tests.

For a copy of this new 8-page illustrated catalog, address the *Leeds & Northrup Company, 4934 Stenton Ave., Philaphia, Pa.*, and ask for Catalog E-53-441(1), "Type U Test Set."

Type S Test Set

Manufacturers of wire, motor windings, electrical instruments and meters, and electrical household applicances, as well as many laboratories, repair shops and maintenance departments, where routine resistance tests are made, will be interested in a newly-revised, illustrated catalog describing the L&N Type S Test Set. It is a general-purpose Wheatstone bridge with self-contained galvanometer and battery. This test set is said to be simple in arrangement, easy to operate, thoroughly reliable, and conveniently portable for shop, laboratory and field.

A copy of this 8-page publication will be sent to anyone interested. Just address the *Leeds & Northrup Company, 4934 Stenton Avenue, Philadelphia, Pa.*, and ask for Catalog E-53-400(1), "Type S Test Set."

THE "GLOBE" IN GLOBE WIRELESS

GLOBE WIRELESS has long been the major avenue of communication throughout the entire Pacific Basin, handling radio messages between continents, countries, islands, and ships at sea.

"Our equipment has transmitted millions of words since it was designed for us by Heintz and Kaufman," states Globe's President R. Stanley Dollar.

"Gammatron tubes form the heart of our transmitters, and many of these tubes have stood up under continuous operation as long as 12,000 hours before failing."

A typical Globe transmitter, such as daily puts San Francisco in contact with Chungking, has two HK-654 Gammatrons in the final. Operating on high frequencies with an output of 3 kilowatts, Globe's signals can readily be heard around the world.

To engineers designing military transmitters, we will gladly furnish data on the unique efficiency and stability of Gammatron tubes at high and ultra-high frequencies.

HEINTZ AND KAUFMAN, LTD.

SOUTH SAN FRANCISCO • CALIFORNIA, U.S.A.

Gammatron Tubes

I.N.C.C.O.
INCCO
INDUSTRIAL CONDENSER CO.
Industrial's high standard of quality parallels that of the famous Hallicrafters HT-4B transmitter in the field of communications.
INDUSTRIAL CONDENSERS ARE ON EVERY BATTLEFRONT WITH THE WORLD-FAMOUS
hallicrafters
COMMUNICATIONS EQUIPMENT
PAPER, OIL AND ELECTROLYTIC CAPACITORS
INDUSTRIAL CONDENSER CORPORATION
1725 W. NORTH AVE., CHICAGO, U. S. A.
DISTRICT OFFICES IN PRINCIPAL CITIES
QUICK DELIVERY FROM DISTRIBUTOR'S STOCKS

Radio Education Notes

To promote a better understanding of electronics and its significance in the future of industrial development, *P. R. Mallory & Co., Inc.*, has scheduled a series of four lectures by Dr. Paul R. Heyl to be given in Indianapolis on March 1 and 29, May 3 and June 7.

The lectures will develop the history, theory and practical applications of electrons, and indicate the progress which the science of electronics has made in gaining control of nature's forces for employment by mankind. Dr. Heyl is one of America's foremost physicists, for many years known throughout the country for his work with the U. S. Bureau of Standards. Recently retired from the Bureau, he has been retained as consultant for Mallory.

Although the lectures are planned primarily for the Mallory engineering, sales and production personnel, a number of individuals from manufacturing plants, colleges, high schools, broadcast stations, training schools for the armed forces, and other interested organizations in the central Indiana area have been invited. A special invitation to attend has been issued to all Indiana members of the Institute of Radio Engineers. Reprints of all lectures will be available.

Tube Picture Book

The Radio Corporation of America, RCA Victor Division, has prepared an assembly of charts for visual instruction in the constructional details of various types of vacuum tubes. This "Tube Picture Book" has been prepared especially for use in war training centers. Consisting of 16 large-size pages (17″×22″), it contains 8 charts which are reprinted on one side only of the sheets to facilitate their use for display mounting.

Such topics as the following are shown in graphic or textual form in the charts: electron beam sheets formed by grid wires, materials used in radio tubes (a strikingly comprehensive list), the structure of a transmitting beam tube, the structural parts of a typical metal tube, the structure if a single-ended metal tube, the internal structure of an acorn pentode and an illustration of its small dimensions, the schematic arrangement of electrodes in a cathode-ray tube, the structure of the electron gun in a cathode-ray camera tube, the structure of an electron-ray ("magic eye") tube, the structure of gas tetrodes, and the structure of a typical glass tube. Thus there are shown structural details of representative receiving, transmitting, cathode-ray, and special tubes.

Individuals in the United States and Canada can obtain a copy of the RCA Tube Picture Book from RCA Tube Distributors or direct from the Commercial Engineering Section, Radio Corporation of America, Harrison, N. J. at a price of ten cents. These charts can be supplied only for the United States and Canada because of certain wartime restrictions.

(Continued on page l)

G. E. builds FM's future on these four facts

G. E. Builds Both FM Transmitters and Receivers

G.E. is the *only* manufacturer with experience in building the complete FM system — FM broadcasting equipment and FM home receivers. Radio research and volume production for war are yielding new possibilities for further improving FM equipment.

G. E. Has Program and Equipment Experience

Three years of broadcast experience in its own proving-ground Station W85A, Schenectady, will enable G.E. to help new FM stations get started quickly. General Electric's experience also includes equipping more than a third of the 36 commercial FM broadcast stations now in operation.



G. E. is Telling Public the Advantages of FM

A powerful G-E advertising campaign in the nation's big-circulation magazines and the thrice-weekly nation-wide G-E program over C.B.S.—Frazier Hunt and the News—are pre-selling the public on the advantages of FM—and are steadily building an expanding post-war market.

Survey Proves Vast Increase in FM Acceptance

An independent consumer survey reports that: The public already strongly approves FM; 85% call it a definite improvement over conventional broadcasting; present owners of G-E FM receivers are the most enthusiastic of all FM owners! . . . *Electronics*

TRANSMITTERS
STUDIO EQUIPMENT
ELECTRONIC TUBES
ANTENNAS
RECEIVERS

GENERAL ELECTRIC

160-B4-6914

NO OTHER MANUFACTURER OFFERS SO MUCH FM EXPERIENCE

COMPLETE STATION EQUIPMENT
FM • TELEVISION • AM

● Although everything we make today goes to war, it is going to work for *you* just as surely as though we could deliver it for your own use in your own plant. For today *all* of America is in business for Victory, and whatever helps the war effort helps us all. / / / Right now "Connecticut" equipment is hard at work all around the globe — precision electrical products, different in detail, but not in basic design, from the ones you'll be using after victory. / / / Once this war is won, and present military secrets become open knowledge, you'll know about "Connecticut" products from your partners, the boys who are using them today. Chances are you'll be using many electrical devices, born of this war, to speed and control peacetime production. We hope to continue working with you then.

ARMY E NAVY

CONNECTICUT TELEPHONE & ELECTRIC DIVISION

GAI GREAT AMERICAN INDUSTRIES INC.

MERIDEN, CONNECTICUT

© 1943 Great American Industries, Inc., Meriden, Conn.

Radio Education Notes

(Continued from page xlviii)

FM Radio Used in 80 San Francisco Public Schools

The San Francisco Board of Education for several years has been operating its own experimental frequency modulation station, KALW, located at the Samuel Gompers Trade School. Foreseeing the possibilities of supplementary radio education, last fall the board purchased and installed an FM radio receiver of the General Electric Company in each of the city's 80 public schools to direct specially chosen educational and musical programs to school children. The broadcasts include current events, opera, musicals, symphony, plays and speeches by men prominent in world affairs. Not only are prearranged programs used during school hours, but the radios furnish entertainment to the pupils on rainy days when it is necessary for them to remain inside the buildings during their recess periods. When the weather permits, music is piped to the school yard for outdoor folk-dancing.

School executives and teachers are said to be enthusiastic about the results being obtained. Emerson School received the first of the FM radios to be delivered, and started at once participating in these educational broadcasts. Miss Pauline Ryder, principal, explains that the program most popular with the pupils is the "school-cast," a special arrangement of current events, broadcast three times a week by newscaster Dwight Newton of KYA, San Francisco.

"The children follow these school-casts with intense interest," Miss Ryder states. "They spend considerable time in previous class-room preparation and in review. Based on up-to-the-minute events, the newscaster asks five questions which he thoroughly discusses and answers. The pupils participate in the program by writing the questions on the blackboard for further discussion, and following geographically with a large map.

"We feel that in the future, particularly after the war is over, the type of specially directed educational braodcasts we are now using will be greatly expanded and improved. Children are familiar with radio entertainment and they have quickly adopted it in the class room. Here at Emerson School, we are pleased with the foresight of our Board of Education in realizing the future of radio education. I am sure teachers and pupils throughout our school system echo our sentiments."

The San Francisco Board of Education's FM transmitter, KALW, is one of seven such stations being operated by public school systems in the United States. Other stations owned by public schools in the country are: KSDS, San Diego; WBEZ, Chicago; WIUC, University of Illinois; WMBE, Memphis; WYNE, New York; and the Buffalo, N. Y. public schools.

WORLD CONCEPTS ARE CHANGING

TUNG-SOL

vibration-tested

RADIO TUBES

With the world map projected from over the North Pole, we see Seattle some 5,000 miles nearer to Calcutta and all of Asia and Europe as our next door neighbors. The World is unchanged . . . it is our concept that is new.

Polar flying is changing our concepts of distance. So it is with every advancement in science. It alters our viewpoint and reflects itself in our daily lives. Electronics is one of the great scientific developments of our time.

The post-war world will be an age of electronics . . . new ways of living in which our industries, our communications, our transportation and even our personal activities and pleasures will be affected. Manufacturers who will produce the machinery, the goods and the equipment we will buy and use will have to think in terms of electronics to meet our new concepts.

TUNG-SOL looks forward to peacetime uses of the transmitting, receiving and amplifying electronic tubes that we are now making for our government. We will be glad to share our experience and knowledge with manufacturers who wish to incorporate electronics as part of their product. Our advisory staff of research engineers is at your service.

TRIPLETT
Combat line INSTRUMENTS

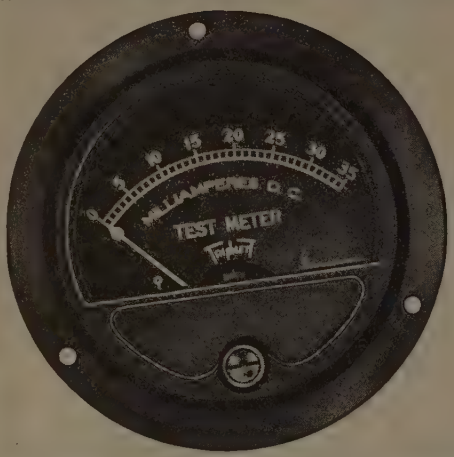

thin Line

MODEL

Deliveries under government requirements are facilitated by two large sub-contracting organizations combining to greatly increase Triplett output.

TRIPLETT

TRIPLETT ELECTRICAL INSTRUMENT CO. · BLUFFTON, OHIO

WORK AT MAXIMUM SKILL

Now Open for Electrical and Electronics Engineers and Physicists

IF YOUR job is not equal to your highest skill, if you have creative ability which seeks expression—you will be interested in the openings we have.

Men who know electronics, the development and production of radio and electronic tubes, can find opportunity now in our Pennsylvania and Massachusetts plants.

Aggressive and independent research has made Sylvania one of the top producers of radio tubes in the United States.

This is a company with which an able man can grow.

These positions afford the opportunity to make a direct and important contribution to the war effort. And, for the right men, there are excellent post-war possibilities with a company well versed in the new and expanding field of electronics.

If you are not now working at your highest skill, write to the Industrial Relations Dept., Sylvania Electric Products, Inc., 500 Fifth Ave., New York, N.Y.

SYLVANIA ELECTRIC PRODUCTS, INC.

POSITIONS OPEN

The following positions of interest to I.R.E. members have been reported as open. Apply in writing, addressing reply to company mentioned or to Box No. .....

PROCEEDINGS of the I.R.E.
330 West 42nd Street, New York, N.Y.

ELECTRICAL ENGINEERS—PHYSICISTS

Radio or ultra-high frequency experience desirable but not essential. Interesting radio tube development work. Good location, Lancaster, Pennsylvania. Address replies to Personnel Dept., RCA, Victor Division, Harrison, N.J. If you are using your full skill, full time on war work, please do not apply.

RADIO AND COMMUNICATIONS

Commonwealth of Australia War Supplies Procurement requires high type man to take charge of Radio and Communications Department in Washington, D.C. Qualifications: general knowledge of radio and communications gained in either purchase or sales field. Draft exempt. Excellent opportunity for right man with salary commensurable. For interview, write Box 293.

ENGINEERS—PHYSICISTS

Radio engineers, electronic engineers, electrical engineers, physicists. A non-profit research laboratory engaged in urgent war research must increase its scientific staff. Men or women (college graduates) with experience in vacuum tube circuit design, construction of aircraft radio equipment and design of small electromechanical devices are needed. Salaries range from $3,000 to $8,000 depending upon experience, ability, education and past earnings.

Apply by mail to Airborne Instruments Laboratory, Columbia University Division of War Research, Box 231, Mineola, N.Y.

RADIO ENGINEERS AND TECHNICIANS

A progressive company with a sound background in radio and electronics needs, at once, several men with training and experience in any phase of the radio industry. The work open is vital to the war effort but offers a promising post-war future for the right men. College degree or equivalent experience necessary. Men now engaged at highest skill on war production should not apply. Write Box 294.

INSTRUCTORS IN RADIO AND ELECTRICITY

50 civilian instructors needed immediately for Army Air Forces Radio Instructor School. Subjects of instruction: Direct current and alternating current electricity, vacuum tubes, standard radio receivers and transmitters; international Morse code, telegraph and radiotelephone procedure. Salaries follow Civil Service starting from $2,000 per year. State experience, education, code speed, personal data. Positions open immediately. Saint Louis University, Army Air Forces Radio Instructor School, 221 N. Grand Boulevard, Saint Louis, Mo. A. H. Weber, Technical Director.

RADIO ENGINEER

Junior engineer, preferably with amateur radio experience, needed as assistant in administrative office of important company. Must know radiotelegraph. Write Box 286.

RADIO, MECHANICAL AND ELECTRICAL ENGINEERS

Several men needed immediately for work on government radio equipment. Men with at least three years experience in design and development of quality equipment desired. College degree or equivalent experience necessary. Any person now employed at highest skill on war production work should not apply. Address Box 280.

(Continued on page lvi)

New! A MOTOR DRIVEN POWERSTAT

Now you can control large amounts of power with a simple push button

NO LONGER is it necessary to sacrifice range and smoothness of control by using antiquated, inflexible tap changing devices and heavy wiring to control A.C. voltage and power. SECO has solved the problem of obtaining a continuous, distortionless and simple control of large amounts of power. A standard line of MOTOR DRIVEN POWERSTATS in sizes up to 75 KVA for single or polyphase operation on 115, 230 or 440 volt circuits is available. You can select a standard unit for your application or where necessary, special designs can be manufactured to meet your requirements.

Engineered combinations of POWERSTAT VARIABLE VOLTAGE TRANSFORMERS and a HIGHLY DAMPED SYNCHRONOUS DRIVING MOTOR of low fundamental speed are the answer to efficient, quick, convenient and continuous control of power.

STANDARD AIR COOLED POWERSTAT

For more than five years SUPERIOR ELECTRIC COMPANY has specialized in CONTINUOUSLY VARIABLE VOLTAGE TRANSFORMERS and has won the confidence of THE ARMED FORCES AND INDUSTRY. Investigate POWERSTAT VARIABLE TRANSFORMERS for your control problem. Standard types are manufactured for single or polyphase operation on 115, 230 or 440 volts.

SECO AUTOMATIC VOLTAGE REGULATOR

Incorporating a Synchronous Motor Drive, SECO DISTORTIONLESS AUTOMATIC VOLTAGE REGULATORS deliver constant output voltage with variations of applied voltage and frequency. The output is unaffected by changes in power factor or magnitude of load. Available in sizes up to 75 KVA.

SEND FOR BULLETINS 149ER (POWERSTAT) AND 163ER (REGULATOR)

SUPERIOR ELECTRIC COMPANY

172 LAUREL STREET **BRISTOL, CONNECTICUT**

DO YOU NEED the "Impossible" in Deliveries OF PILOT LIGHT ASSEMBLIES?

DIALCO WILL HELP YOU "DELIVER THE GOODS" ON TIME!

Preferred where variable light intensity is required; Series D.V. uses superior mechanical shutter; Series D.P. uses polaroid discs.

"Beat the Promise" with Dialco! Leaders in this field, we are geared for high-speed service!
Request NEW Catalogue, attention Dept. D-41.

WHAT ARE YOUR DELIVERY SCHEDULES? LET US HELP YOU MEET THEM.

DIALCO

SEND SPECIFICATIONS, SAMPLES AND BLUEPRINTS WILL BE SUBMITTED PROMPTLY.

DIAL LIGHT CO. of America INC.

90 WEST STREET · NEW YORK N. Y.

2 BOOKS EVERY "WAR-TORN" ENGINEER NEEDS!

$7.50
160 pgs.
(9½ x 12 in.)

A-C CALCULATION CHARTS

By R. LORENZEN

This new Rider Book greatly reduces the time required for alternating current engineering calculations—speeds up the design of apparatus and the progress of engineering students. Two to five times as fast as using a slide rule! Thousands of enthusiastic users.

A-C CALCULATION CHARTS are designed for use by civilian engineers and engineers of the armed forces who operate in the electrical—communication—power—radio—vacuum tube—telephone—and in general, the electronic field. Invaluable for instructors as well as students, and also administrative officers who check engineering calculations.

CATHODE RAY TUBE AT WORK

The Cathode Ray Tube at Work is the accepted authority on the subject. The cathode ray tube in the Oscillograph and its application to electronic and industrial work is fully discussed. Profusely illustrated. 338 pages $3.00



JOHN F. RIDER PUBLISHER, Inc.
404 FOURTH AVENUE NEW YORK CITY
Export Division: Rocke-International Elec. Corp., 100 Varick St., N.Y.C. · Cable: ARLAB

(Continued from page liv)

RADIO ENGINEERS AND TECHNICIANS

In critical war industry. Opportunity for several competent men in research and production engineering on Government contracts. Work is with a company well known in the radio industry, located in a Michigan city. Send full particulars of your experience and photo. Address Box 284.

NAVAL ORDNANCE LABORATORY

The Naval Ordnance Laboratory, located in Washington, D.C., is a research development agency of the Bureau of Ordnance, concerned with the design of new types of naval mines, depth charges, aerial bombs and other ordnance equipment, including measures for the protection of ships against mines.

This laboratory needs physicists and electrical engineers with electronics experience, mechanical engineers familiar with the design of small mechanical movements or mechanisms, and personnel for technical report writing and editing. Write to Naval Ordnance Laboratory, Navy Yard, Washington, D.C.

RADIO ENGINEERS AND TECHNICIANS

Technicians with specialized engineering knowledge. Perform efficient maintenance and adjustment of radiotelegraph operating office equipment. Technical knowledge of special radio and related equipment needed in the service. Must be capable of sending and receiving the International Morse Code at a minimum speed of 20 words per minute and must hold a Federal License as required by law.

Radio Instructor on operation and maintenance of radio transmitting equipment.

Maintenance Engineers to keep machinery, mechanical equipment, radio-communication operating machines, and radio instruments in good repair. Construct and install new apparatus. A combination of maintenance mechanic and machinist duties.

Maintenance Electricians to take charge of all plant maintenance pertaining to all the electrical facilities, wiring and machinery. Must be capable of doing mechanical construction of communication equipment and electrical wiring, and work from blueprints. Address Box 283.

RADIO ENGINEERS AND MONITORING OFFICERS

Applications for positions with the Federal Government of radio engineer at $2,600 to $8,000 a year, radio monitoring officer at $2,600 and $3,200 a year, and radio mechanic technician at $1,440 to $2,600 a year, will be accepted at the Washington, D.C., office of the United States Civil Service Commission. Qualified persons urged to apply immediately. No written tests. Applicants will be rated on the basis of their statements in the application, subject to verification by Commission. For full information, and application forms, write to United States Civil Service Commission, Washington, D.C.

ENGINEERS

The salary is open and depends only upon the ability and experience of the engineer.

1. Electronic and radio engineers to design electronic navigation and communication equipment for aircraft.
2. Mechanical engineers familiar with and interested in the design of small precision equipment and familiar with shop practice and tools.
3. Engineers familiar with the design of components for electronic equipment.
4. Technical men able to write technical material for instruction books.

These positions can be permanent for the right men. Excellent opportunities for advancement.

(Continued on page lviii)

Where Sustained Power is Vital..
Depend on
TAYLOR TUBES
Wherever our boys are fighting, Taylor Tubes are daily proving their reliability, efficiency and extra stamina. In many battle positions they operate twenty-four hours a day — providing the power to help keep essential communications going through — delivering the same dependable service that established and maintained Taylor's peacetime reputation for high quality tube performance.
Taylor factories are turning out more tubes than ever before — supplying them where needed for the all out Victory program. After V Day, the same quality Taylor Tubes that are meeting today's urgent demands will provide "More Watts Per Dollar" service for all.
√TRANSMITTING √ELECTRONIC
√RECTIFIER √INDUSTRIAL
Taylor Tube
CUSTOM BUILT
T40
Taylor HEAVY CUSTOM BUILT DUTY Tubes
TAYLOR TUBES INC., 2312-18 WABANSIA AVE., CHICAGO, ILLINOIS

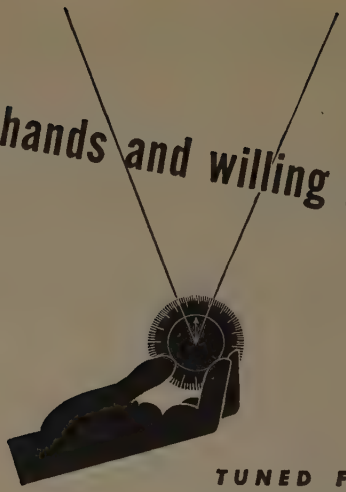

skilled hands and willing hearts . . .

TUNED FOR BATTLE

Advanced developments by Doolittle for critical WAR EQUIPMENT today means better communications for your peacetime needs tomorrow.

To Assure Victory
Buy More U. S. War
Bonds and Stamps

Doolittle
RADIO, INC.

Builders of Precision Radio Communications Equipment
7421 S. Loomis Blvd., Chicago, U. S. A.

ANDREW

COAXIAL CABLES

ANDREW

ANDREW

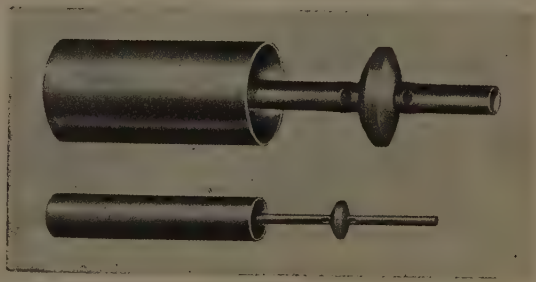

. . . for Radio Transmission Lines

The VICTOR J. ANDREW CO., pioneer manufacturer of coaxial cables, is now in a position to take additional orders, in any quantity, for all sizes of ceramic insulated coaxial cables and accessories. The Andrew Co. engineering staff, specialists in all applications of coaxial cables and accessories, will be pleased to make recommendations to meet your particular requirements.

"Attention!"

If coaxial cables are your problem . . . write for new catalog showing complete line of coaxial cables and accessories.

ANDREW

VICTOR J. ANDREW CO.
363 East 75th Street, CHICAGO, ILLINOIS
ANTENNA EQUIPMENT

(Continued from page lvi)

Engineers with experience are preferred, but the right persons do not need experience if they have the ability to learn and the required aptitude. Applicants may be male or female. Persons already engaged in war work cannot be considered.

Write directly to Chief Engineer, Bendix Radio Division, Bendix Aviation Corp., Baltimore, Maryland giving complete details of education and experience.

ELECTRONIC ENGINEERS

Engineers with backgrounds for acoustics, supersonics, broadcasting, frequency modulation, or ultra-high frequencies. Applicants should not be subject to immediate draft call and should not be engaged at their highest skilled war work. An engineering degree is desirable but not required.

Women with similar technical knowledge and experience will be considered.

Company is a large electrical manufacturer and is within twenty minutes commuting distance of New York City. Salaries are commensurate with education and experience. Address Box 287.

RADIO ENGINEER

Experienced in the manufacture and testing of ultra-high-frequency apparatus; must be capable of taking complete charge of war projects. Splendid opportunity. War workers at highest skill need not apply.

Inquiries will be kept confidential. Please state age, experience, and salary expected. Write Box 288.

RADIO INSTRUCTION-BOOK WRITERS

Thorough knowledge of radio principles and ability to describe in simple terms the operation of UHF circuits required. Work relates to instruction books for electrical apparatus. Excellent opportunity to do essential work in very essential war industry. Salary depends upon qualifications and experience.

Replies solicited from Engineers, Patent Attorneys, Teachers and others qualified.

Write complete qualifications and salary desired to Hazeltine Electronics Corporation, 1775 Broadway, New York, N.Y.

RADIO ENGINEER

Mathematical knowledge to include trigonometry and elementary calculus. Must be familiar with all types of circuits for reception and transmission on frequencies up to 200 mc/s. Knowledge of transmission lines, aerial arrays, television and cathode-ray-tube technique desirable. Must also have knowledge of radio test equipment and must understand any circuit diagram.

Prefer man conversant with manufacture, repair and fault location on all types of transmitters and receivers. Address Box 289.

RADIO ENGINEER

EDUCATION: Minimum of two years college in Electrical Engineering.

EXPERIENCE: Minimm of two years in radio test or engineering, or five years in electrical control work (power station or telephone central-office wiring, etc.).

Must be of a type qualified to interpret and clarify with inspectors and responsible executives electrical specifications, problems of manufacture, test and inspection. Address Box 290.

ELECTRO-MAGNETIC ENGINEER

Unusual opportunity for engineer with vision for new ideas in design work with nationally known, long established firm in Eastern Pennsylvania, now 100% on war work. Firm large enough to make remuneration attractive, small enough to insure recognition. Training in design of relays, timers and solenoids would be helpful. Write Box 285.

(Continued on page lx)

With the fate of a quarter-million-dollar airplane...and the precious lives of its crew...so dependent upon the performance of the Communications system, even so seemingly simple a part as a transformer becomes vitally important. **Its value is not measured in dollars and cents, but in the service it performs.**

ROLA, now streamlined for war work, is producing transformers, head sets, choke coils and other communications equipment for Army and Navy aircraft in unprecedented volume—built to standards of perfection never before attempted "commercially." This has meant a transition in processes, in equipment, in testing and inspection, but thanks to the experience gained from twenty years of leadership in the radio field, the task has been accomplished, speedily and effectively.



We can do still more:

Today, Rola's greatly expanded facilities are dedicated completely to making materials of war. If transformers... or related electronic items ... are a part of the product you make, we're sure it would be to your advantage to discuss your requirements and your problems with us. The Rola Company, Inc., 2530 Superior Avenue, Cleveland, Ohio.

★ ROLA ★

MAKERS OF THE FINEST IN SOUND REPRODUCING AND ELECTRONIC EQUIPMENT

OUT and BACK by Radionics
EICOR
Dynamotors
Dynamotors go into action right from the take-off. They furnish the necessary high voltage and current for radio communications, direction-finders, compasses, and other aircraft equipment which enable our men to reach their objective, attack and return safely.
EICOR DYNAMOTORS have earned their fine reputation through years of exacting service in both the commercial and military communications fields.
EICOR INC. 1501 W. Congress St., Chicago, U.S.A.
DYNAMOTORS • D. C. MOTORS • POWER PLANTS • CONVERTERS
Export: Ad Auriema, 89 Broad St., New York, U. S. A. Cable: Auriema, New York

DEVELOPMENT—DESIGN

Electro-Acoustical

Several communications engineers needed by progressive company in expanding engineering department.

Telephone Development

Graduate electrical engineer needed; good theoretical knowledge of acoustics desirable; some experience with magnetic circuits, acoustical measurements.

Laboratory Engineer

For laboratory measurements and tests on a-f communications apparatus, a graduate electrical engineer. To design and supervise equipment for production testing; must maintain laboratory standards. Familiarity with government specifications and inspections procedure desirable.

Communications—Signaling

Design engineer familiar with application and molding technique of plastics. Should have several years of design experience on small electrical apparatus; understanding of magnetic and electrical circuits desirable.

Permanent—Post-War

Positions concerned now with war contracts and planning post-war developments. Technically expert staff going places. Those now employed at highest skill in war industry need not apply. Communicate with Chief Engineer, giving background and salary requirements. Write, phone or wire.

GREAT AMERICAN INDUSTRIES, INC.
70 Britannia Street, Meriden, Connecticut

(Continued from page lviii)

PATENT ATTORNEY

Patent Attorney to join small Patent Department. Write Personnel Director, Brush Development Company, 3311 Perkins Avenue, Cleveland, Ohio.

RADIO ENGINEER

Opening in engineering department of concern making communication apparatus. Prefer college graduate with ultra-high-frequency experience, but lack of experience in this field will not bar an adaptable man.

Duties involve developing, designing and carrying the product through the shop with a minimum of supervision. If inexperienced, the duties would be the same under supervision. The company is engaged in war activity exclusively and expects to continue this work after the war.

Salary $2,500 to $5,000 depending upon qualifications. Pleasant surroundings and working conditions. If now employed in war work, a release from the employer must be obtainable. Address: Chief Engineer, Templetone Radio Company, Mystic, Conn.

TECHNICAL AND SCIENTIFIC AIDS

Federal government needs aids for research and testing in the following fields: chemistry, geology, geophysics, mathematics, metallurgy, meteorology, physics, and radio. The positions pay $1,620 to $2,600, plus overtime.

For the assistant grade, applications will be accepted from persons who have completed 1 year of paid experience or a war training course approved by the U. S. Office of Education. One year of college study, including 1 course in the option applied for, is also qualifying. Persons now enrolled in war training or college courses may apply, subject to completion of the course. For the higher grades successively greater amounts of education or experience are required.

The majority of positions are in Washington, D.C., but some will be filled in other parts of the United States. There are no age limits, and no written test is required. Persons using their highest skills in war work are not encouraged to apply.

Applications will be accepted at the U. S. Civil Service Commission, Washington, D.C., until the needs of the service have been met.

ELECTRICAL ENGINEER

Thoroughly familiar with the manufacture and design of capacitors. We have an unusual opportunity open for an engineer experienced in the above line of work and who can also assume responsibility. Industrial Condenser Corporation, 1725 West North Ave., Chicago, Ill.

INSTRUCTORS IN ADVANCED ARMY-NAVY PROGRAM

Prominent Eastern technical institute needs additional instructors in officer training program in modern electronics and radio applications. An excellent opportunity to acquire advanced knowledge and to render important service in war effort. Men having various degrees of qualifications are needed, from recent graduates in Electrical Engineering or Physics to those with long experience in radio engineering or teaching. Salary according to qualifications and experience. Applicants must be U. S. citizens of unimpeachable reputation. Any inquiries will be treated as highly confidential. Please send personnel data and photograph to Box 292.

Attention Employers . . .

Announcements for "Positions Open" are accepted without charge from employers offering salaried employment of engineering grade to I.R.E. members. Please supply complete information and indicate which details should be treated as confidential. Address: "POSITIONS OPEN," Institute of Radio Engineers, 330 West 42nd Street, New York, N.Y.

The Institute reserves the right to refuse any announcement without giving a reason for the refusal.

Important Notice

To All Users of

STEATITE INSULATORS

About a year ago—there was a drastic shortage of Steatite insulators and a serious lack of adequate manufacturing facilities. Consequently, there was a clamor for substitutes. Government officials took immediate steps to remedy the situation by urging those with years of engineering experience and a thorough knowledge of Steatite manufacturing processes to expand their production.

Today—there is no shortage of Steatite or of manufacturing facilities. Steatite insulators are available for prompt delivery in all sizes, shapes, and quantities. The production capacity of the industry as a whole has expanded far beyond the critical state, and now there is no longer reason to consider substitute materials.

Stupakoff engineers can help you solve your problems now. Stupakoff production facilities are available to fill your requirements now. Inquiries are given immediate attention.



The Army-Navy "E" Flag "for great achievement" flies over the Stupakoff plant.

STUPAKOFF CERAMIC AND MANUFACTURING CO., LATROBE, PA.

Ceramics for the World of Electronics

A Comprehensive Volume Prepared for Engineers by M. I. T.

387 illustrations



772 pages

$6.50

APPLIED ELECTRONICS

by the Electrical Engineering Staff at the Massachusetts Institute of Technology

Here is an important book on electronics that treats physical processes in such detail as to provide a thorough understanding of the characteristics, ratings, and applicability of electronic devices. It is particularly designed for those whose interests are in power, communications, control, measurement, or other phases of electrical engineering.

The early chapters give a working knowledge of the physical phenomena involved in electronic conduction. The remainder of the book discusses applications common to various branches of engineering.

Noteworthy is the inclusion of up-to-date material on electron ballistics, electron optics, thermionic emission, limitation of current by space charge, and the electro-kinetic behavior of gases.

The more important electron tubes, both vacuum and gas-filled types, are comprehensively presented. Special tubes such as cathode-ray oscilloscopes, electron multipliers, electron microscopes, television tubes, ultra-high frequency tubes, phototubes, thyratrons, cold-cathode tubes, ignitrons, and strobotrons are included.

ON APPROVAL COUPON

JOHN WILEY & SONS, INC.
440 Fourth Avenue, New York, N.Y.

Please send me a copy of M. I. T.'s APPLIED ELECTRONICS on ten days' approval. At the end of that time, if I decide to keep the book, I will remit $6.50 plus postage; otherwise I will return the book postpaid.

Name .....

Address .....

City and State .....

Employed by .....

IRE-6-43

INDEX

Section Meetings xx
Membership xxii
New Equipment Notes xxx
Army-Navy "E" Honor Roll xxxiv
Current Literature xliv
Booklets xliv
Radio Education Notes xlviii
Positions Open liv

DISPLAY ADVERTISERS

Acme Electric & Mfg Company xxx
Aerovox Corporation iii
Allen-Bradley Company xxxix
Alliance Mfg. Company xliv
American Lava Corporation xi
American Telephone & Telegraph Co. ..Facing xxi
American Transformer Company xxxvii
Victor J. Andrew Company lviii
Arnold Engineering Company xxxii

Bliley Electric Company xlvi

Capitol Radio Engineering Institute xxx
Centralab xiv
Chicago Transformer Corp. iii
Clarostat Manufacturing Co. xxvi
Connecticut Telephone & Electric Div. I
Cornell-Dubilier Electric Corp. .....Cover III
Corning Glass Works ..... iv, v

Daven Company xvii
DeJur-Amsco Corporation xix
Tobe Deutschmann Corp. lxiii
Dial Light Co. of America, Inc. lvi
Doolittle Radio, Inc. lvii
Allen B. DuMont Laboratories, Inc. xxviii
D X Crystal Company xxxviii

Eicor, Inc. lx
Eitel-McCullough, Inc. ..... vi i ix
Elastic Stop Nut Corp. of America xxxiii
Electronic Corp. of America xxix
Electronic Laboratories, Inc. .....Facing xx
Electro-Voice Mfg. Company, Inc. vi

Federal Telephone & Radio Corp. lxiv

General Electric Company ..... xxxv, xlix
General Radio Company .....Cover IV
Great American Industries, Inc. lx

Hallicrafters Company xli
Heintz & Kaufman, Ltd. xlvii
Hytron Corporation xxiii

Industrial Condenser Corp. xlviii
International Resistance Co. xxxi
International Telephone & Telegraph Corp. lxiv
Isolantite, Inc. .....Facing xxviii

Jackson Electrical Instrument Co. xl

Lafayette Radio Corporation xlvi

National Company, Inc. xliii
National Union Radio Corp. xxi
North American Philips Co. xxxvi

Radio Corporation of America, Victor Div. ..... xii, xiii, xvi
RCA Aviation Radio .....Facing xxix
Rauland Corporation xlv
Raytheon Manufacturing Company x
Remler Company, Ltd. xlii
John F. Rider Publisher, Inc. lvi
Rola Company lix

Selenium Corp. of America lxii
Shallcross Mfg. Company xxiv
Shure Brothers xxxviii
Small Electric Motors (Canada) Ltd. xxv
Sprague Specialties Company li
Standard Transformer Corp. xviii
Stupakoff Ceramic & Mfg. Co. lxi
Superior Electric Company lv
Sylvania Electric Products, Inc. ..... xxvii, liv

Taylor Tubes, Inc. lvii
Thordarson Electric Mfg. Company xxxiv
Triplett Electrical Instrument Co. liv
Tung-Sol Lamp Works, Inc. liii
Turner Company xxii

United Transformer Company .....Cover II
Utah Radio Products Company xx

Westinghouse Electric & Mfg. Co. vii
Wilcox Electric Company xv
John Wiley & Sons, Inc. lxii

EMBY SELENIUM *Rectifiers* ENGINEERED FOR ENGINEERS

N2 Input 5 volts. Half wave. Continuous dc current 1 ma. Used with meters, detector circuits, bias voltage.



DS Input 10 volts. Full wave Bridge. Continuous dc 10 ma. Unbreakable plastic case with mounting extension.

DL Input 10 volts. Full wave bridge. Continuous dc rating 35 ma. Mounted in aluminum case with mounting extension.

Permanent characteristics. Unlimited life. Temperature range, −70° to +70° C. Unaffected by severe atmospheric conditions. Increased efficiency with increased temperature. Sealed-off units supplied for aircraft services. Rectification is instantaneous, no warm up period required. No moving parts. Shock proof. Series N & S have satisfactory frequency characteristics and can be used in the frequency range up to 100 kc. *Immediate delivery on many types.* Available through your Electronic Parts Distributor or write:

SELENIUM CORPORATION OF AMERICA

Manufacturers of EMBY Rectifiers, Photo-Electric Cells and allied scientific products.

1800-1804 WEST PICO BLVD. LOS ANGELES, CALIFORNIA

Eastern Sales Division: 2957 - 214th St., Bayside, L. I. Telephone: Bayside 9-8958

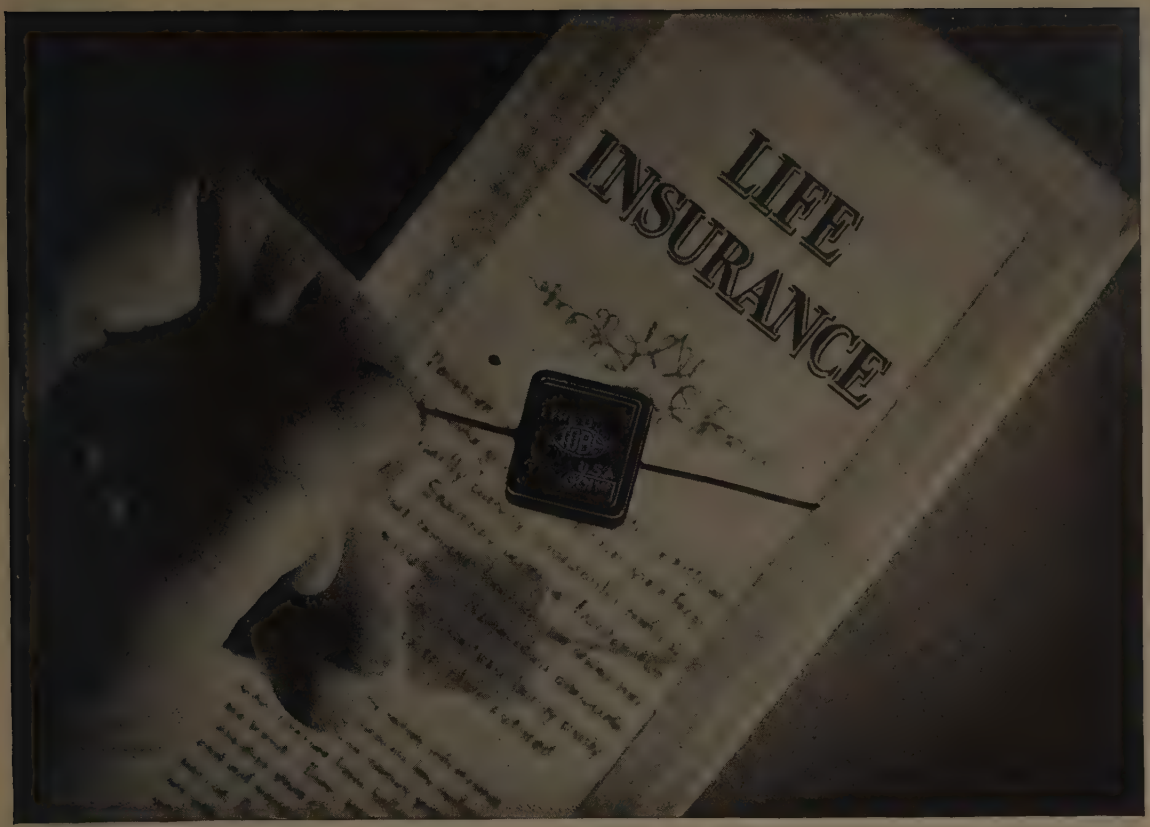

NOW AVAILABLE FOR YOUR PRODUCTION REQUIREMENTS!

The first oil-impregnated condenser to be found physically and electrically interchangeable with the majority of mica capacitors used in the by-pass and coupling circuits of radio and radar equipment.

The Tobe Type DP Molded Paper Capacitor has *long life built into it* through every step of manufacture. Rigid inspections maintain a standard that is exceptionally high—so high, in fact, that "returns" are almost completely unknown.

For the first time since its introduction we are *now* in a position to accept immediate orders for Type DP, with *prompt delivery assured.* They will be filled in order of receipt and we suggest you act promptly. For production samples or further information write TOBE DEUTSCHMANN CORP., CANTON, MASS.

SPECIFICATIONS—TYPE DP CAPACITOR

CAPACITANCE	.001 to .01 mfd.
WORKING VOLTAGE	600 volts DC—flash test 1800 volts DC
SHUNT RESISTANCE	At 185° F.— 1000 megohms or greater
	At 72° F.—50000 megohms or greater
WORKING TEMPERATURE RANGE	Minus 50° F. to plus 185° F.
OPERATING FREQUENCY RANGE	Upper limit 40 megacycles
	Q at one megacycle—25 or better
POWER FACTOR	At 1000 cycles—.005 to .006

These capacitors meet Army and Navy requirements for immersion seal.

TOBE DEUTSCHMANN CORP. TOBE CANTON · MASSACHUSETTS

They work together better . . .
because they can talk together

From a thousand feet up
The burning airdrome
Looks like
A "pushover" . . .

But
When you get
Right down to earth
It turns out to be
Anything but.

Suddenly the trees
To the right
Start throwing lead—
And your men
Are still hanging
Like clay pigeons
In their harnesses.

* * *

What a break
That you're equipped
With a
Two-way
Radio.

What a break
That you can tell your trouble
To a friendly
Fighter plane.

* * *

Today, communication equipment
Designed and manufactured
By I.T.&T. associate companies
Is helping Uncle Sam's fighting forces
Work together
On land, sea and in the air . . .

Tomorrow, the broad experience
Of I.T.&T.
In the field of communications
Will help build a better world
For every man.

International Telephone and Telegraph Corporation *67 Broad St., New York, N. Y.*

I T&T

Manufacturing Associate:
Federal Telephone and Radio Corporation

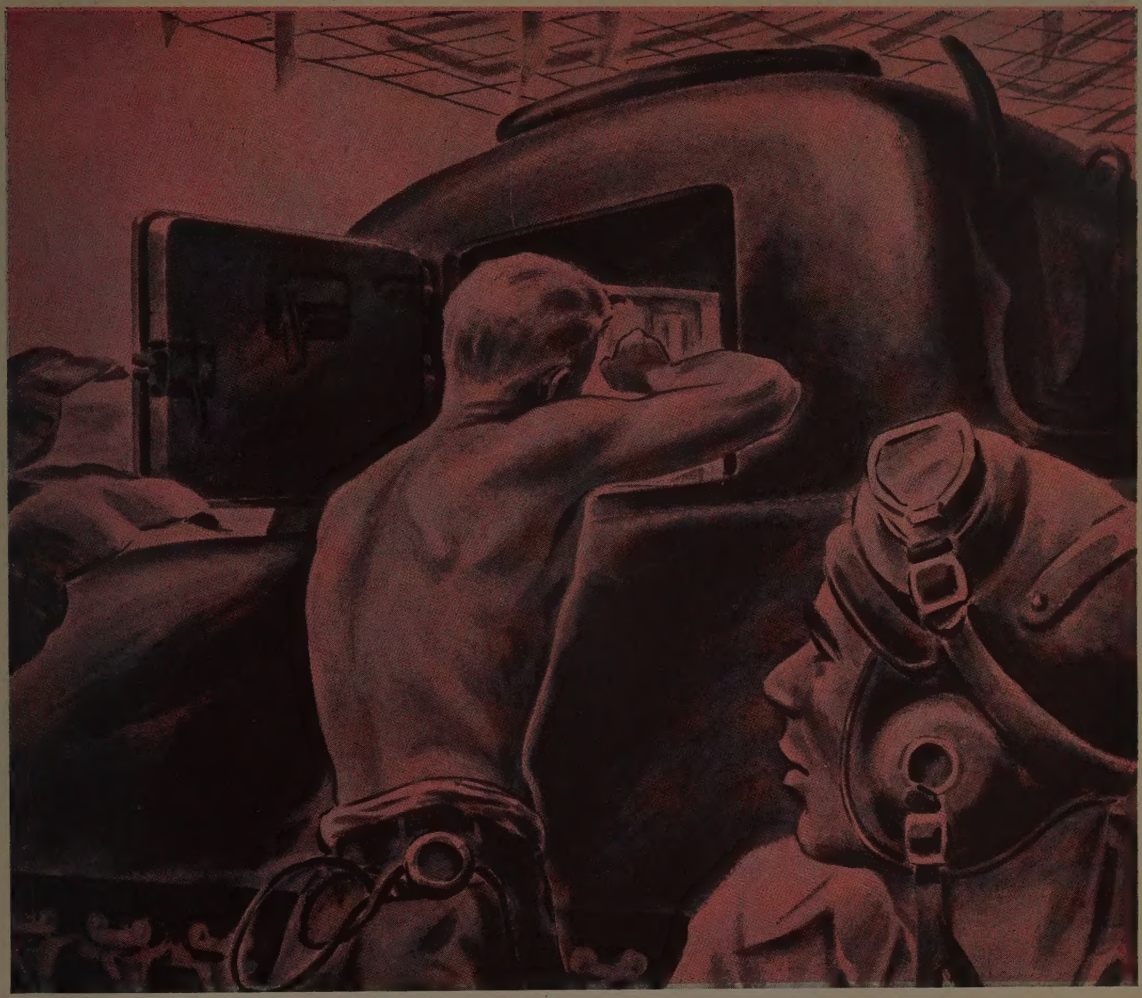

"Hmm! Nothing wrong with the Capacitors anyhow"

In steaming swamps, icebound wastelands and arid desert—the fighting fronts of global war—Cornell-Dubilier capacitors are revealing the stout-hearted stamina that's in them. Today, as in peacetime, there are more C-D capacitors in use than any other make.

You can give your product this same measure of dependability by using C-Ds whenever the design calls for capacitors. Engineered by specialists and backed by 33 years of manufacturing experience, the C-D capacitor—as a *fighting tool* of World War II—is more reliable than ever. Cornell Dubilier Electric Corporation, South Plainfield, New Jersey.

MICA CAPACITORS
for high frequency applications

The type 75A Mica Capacitor illustrated, was designed for high frequency, high current, continuous heavy-duty applications.

CHECK THESE FEATURES:

Completely oil-filled and hermetically sealed.

Heavy conical ceramic insulator provides maximum insulation and mechanical strength.

Employs C-D patented radial type, series stack construction. This results in low-losses, elimination of corona effects and power losses.

These capacitors as well as others in the complete C-D line are described in Catalog 160 T free on request.

Cornell Dubilier

capacitors

MICA • DYKANOL • PAPER
WET & DRY ELECTROLYTICS

MORE IN USE TODAY THAN ANY OTHER MAKE

QUALITY CONTROL

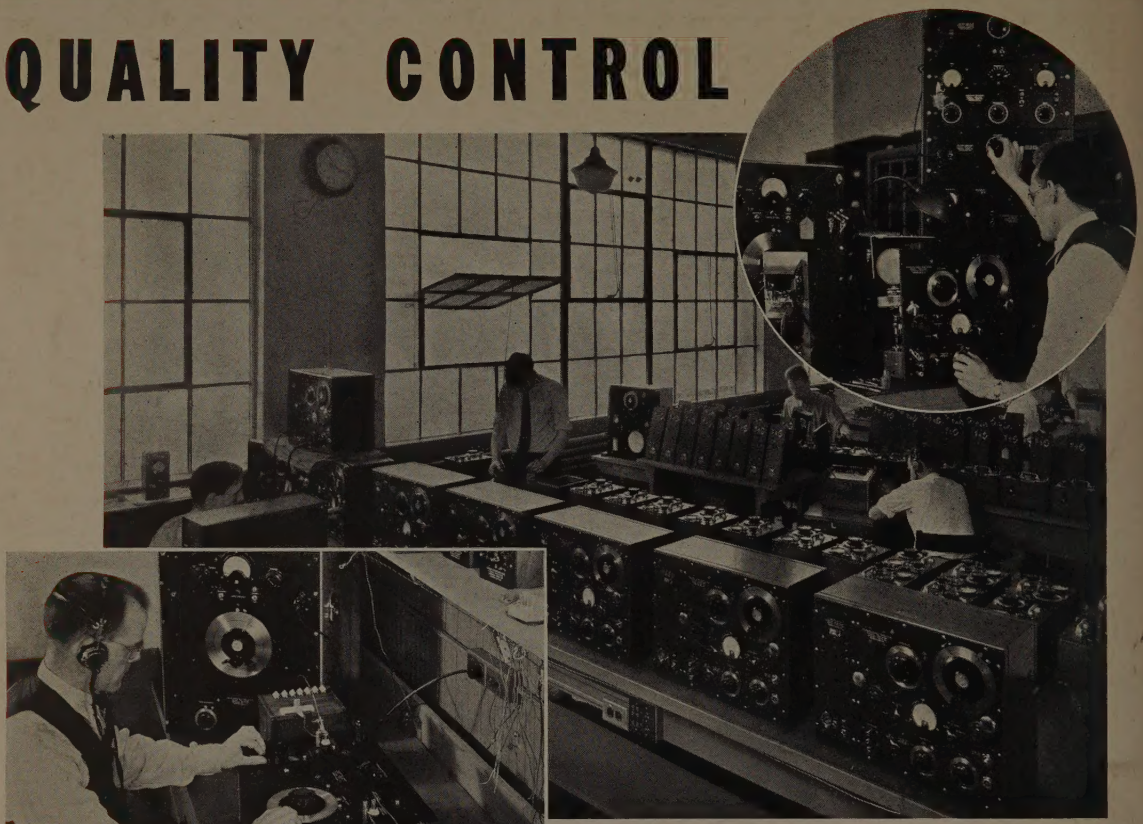

in the GENERAL RADIO Standardizing Laboratory

HOWEVER well designed an instrument may be, accurate calibration and reliability in service determine its ultimate usefulness. Testing, therefore, has long been an important final step of our manufacturing; approximately 10% of the total man hours required to produce a General Radio instrument is spent in our standardizing laboratory. Here a carefully planned schedule of tests and measurements transforms an unadjusted, uncalibrated device into a precision instrument.

Testing specifications embody not only the rigid requirements imposed by the design objectives of the instrument, but also the field data collected in hundreds of case histories of similar instruments. Engineering test and calibration operations cover far more than meter reading and embrace a wide variety of precise electrical measurements.

To carry out these tests, capable personnel, adequate test equipment, and reliable standards are necessary. Many of the staff have engineering degrees or are graduates of engineering institutions. All are capable technicians. The laboratory equipment includes the entire line of General Radio instruments as well as those of many instrument manufacturers in other fields. As a basis for the measurements, the laboratory maintains precise, accurately-known standards of resistance, capacitance, inductance and voltage. Frequency measurements are based on the engineering department's primary standard.

Quality control in the General Radio Standardizing Laboratory is the result of years of experience in instrument manufacture; it is the customer's assurance of uniformly accurate and reliable instruments for his own testing department.



GR GENERAL RADIO COMPANY · Cambridge, Massachusetts
NEW YORK LOS ANGELES